



INSTALLATION INSTRUCTIONS

Model#05

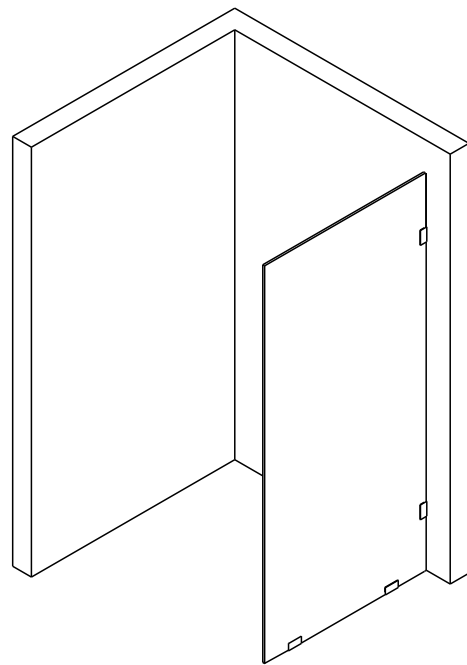

**THANK YOU FOR PURCHASING OUR PRODUCTS.
FOR IMMEDIATE HELP WITH ASSEMBLY OR
PRODUCT INFORMATION EMAIL US:**

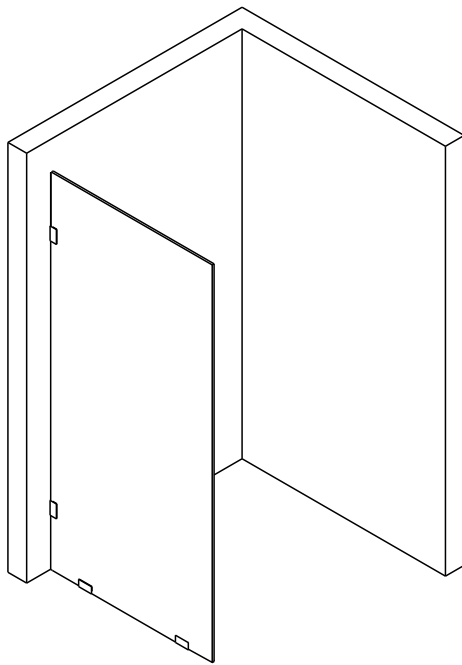

SUPPORT@CUSTOMERSERVICEYIBAI.COM

Please offer your order ID and the product model number

Our staff is ready to provide assistance M-F 8:00 AM to 5:00 PM PST

⚠ Important Notice Before Installation:

Please prepare Silicone Sealant in advance (not included). It is crucial to use the Silicone Sealant in the final step to prevent the risk of water leakage. Refer to Page 6 for its application location.

◆ General Information

Inspect the product immediately upon receipt for transit damage, missing packs/parts or manufacturing fault. Damage reported later will not be accepted. Handle the product with care avoiding knocks and shock loading to all sides and edges of the glass.

◆ Notes: Safety glass can not be re-worked

Read these instructions carefully before start of installation.

Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.


Note: This product is heavy and may require two people to install.

◆ Aftercare instructions


After use, your shower should be cleaned with soap and water. This is particularly important in hard water districts where insoluble lime salts maybe deposited and allowed to build up. Cleaners of a gritty or abrasive nature should not be used. Care should be taken to avoid contact with strong chemicals, they can be used but with caution, if in doubt contact the manufacturer of the cleaner in question.

Keep these instructions for aftercare and customer service details.


Tools Required




Silicone Sealant




Level




Drill



**Ø1/4"
Drill Bit**




**Screwdriver
(Phillips)**




Hammer




Pencil




Tape Measurer




**Sealant
Finishing Tool**



**Painters
Tape**



Safety Glasses




Knife





Work Gloves

PARTS LIST

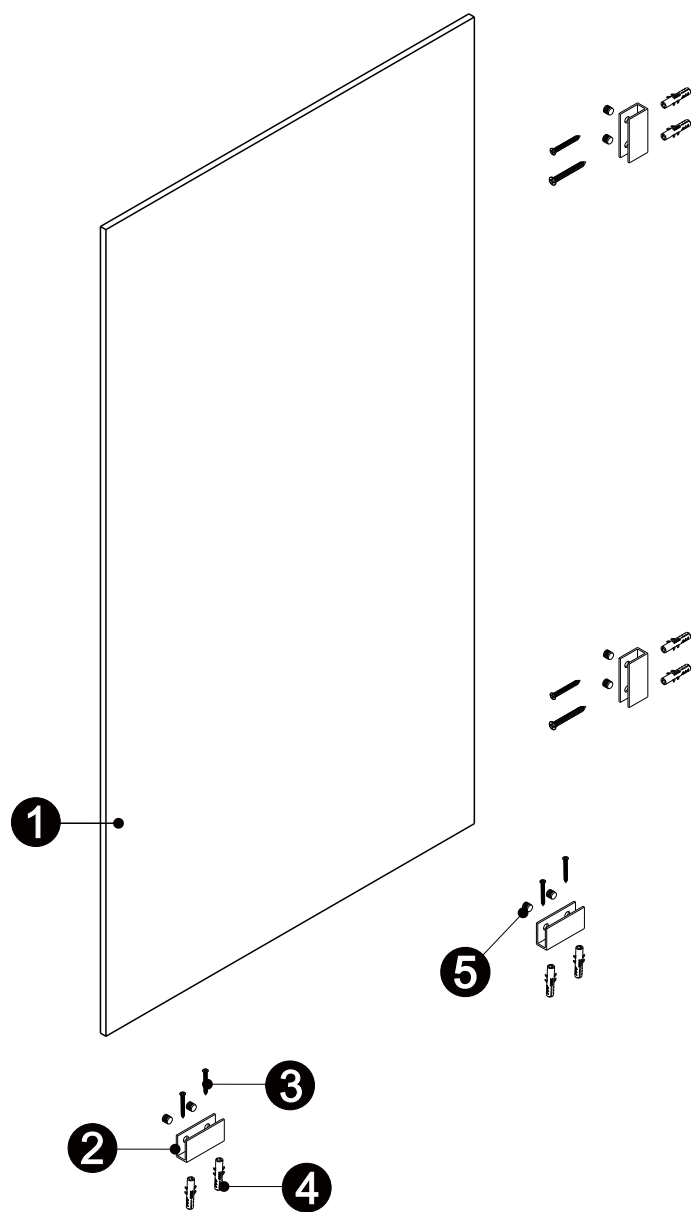

 keep small parts away from children

PACKING LIST




Glass Door	Glass Fixing Component	St4 * 30 Self Tapping	Drywall Anchor	Set Screw
				
1 1 PCS	2 4 PCS	3 10 PCS	4 10 PCS	5 8 PCS

INSTALLATION STEPS

STEP 1-Seal strips and fixing components installationa

Parts Required:

Part No.	Description	Qty
1	Glass Door	1
2	Glass Fixing Component	4
5	Set Screw	8

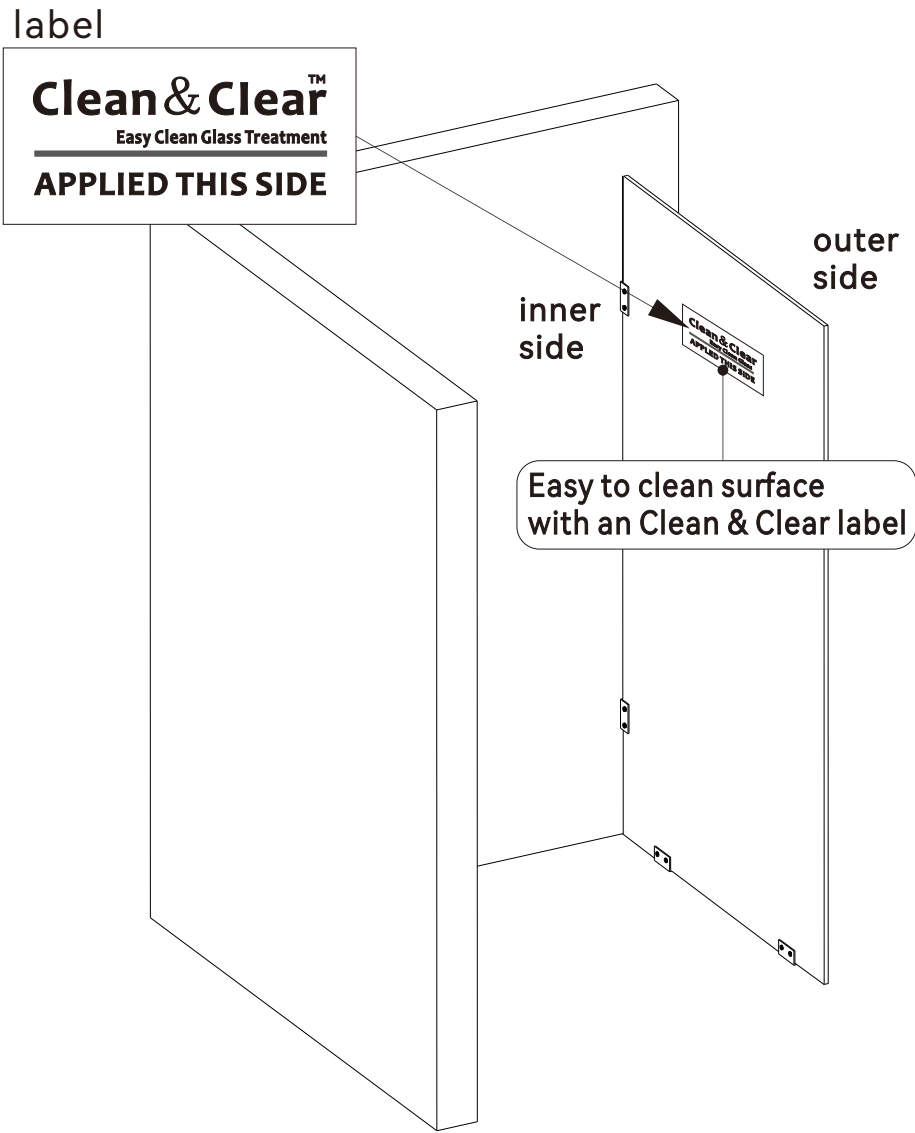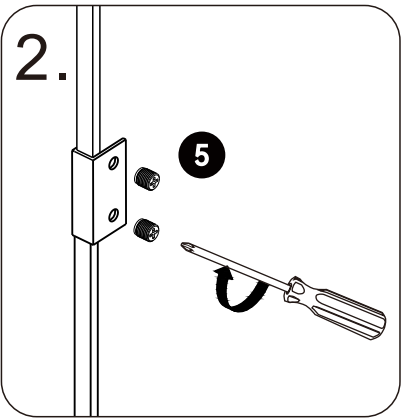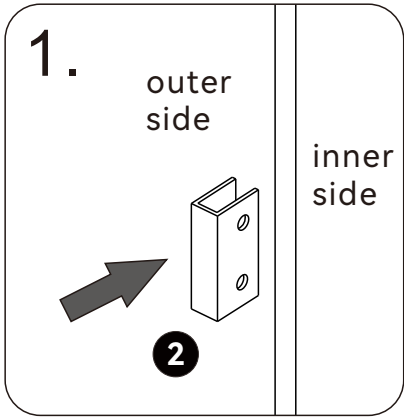





1. Clip the glass fixing component (#4) onto the edge of the glass doort (#1).
2. Thread the set screw (#7) through the glass fixing component (#4) and tighten it against the glass.

INSTALLATION STEPS

STEP 1-Mark positioning lines on the wall

Parts Required:

Part No.	Description	Qty
1	Glass Door	1
2	Glass Fixing Component	4
4	Set Screw	8

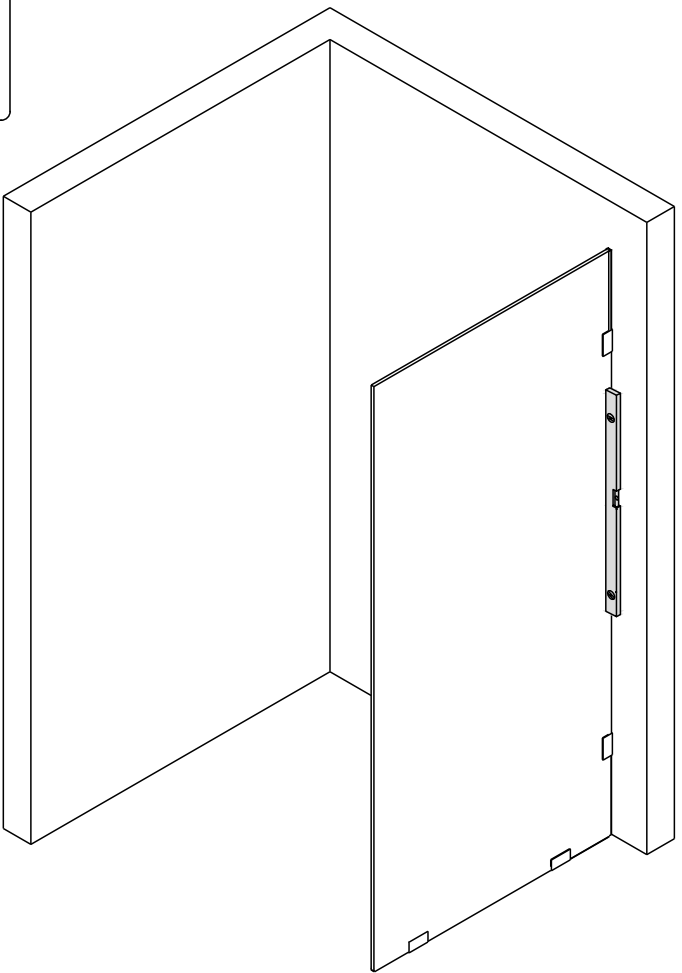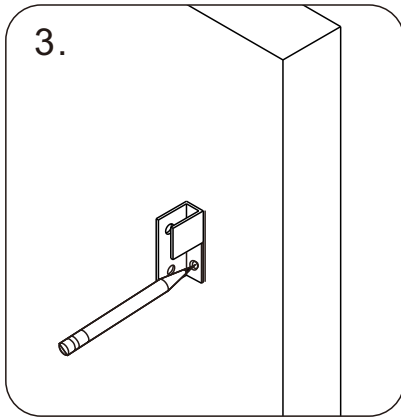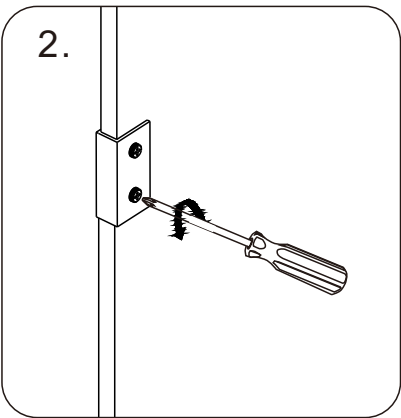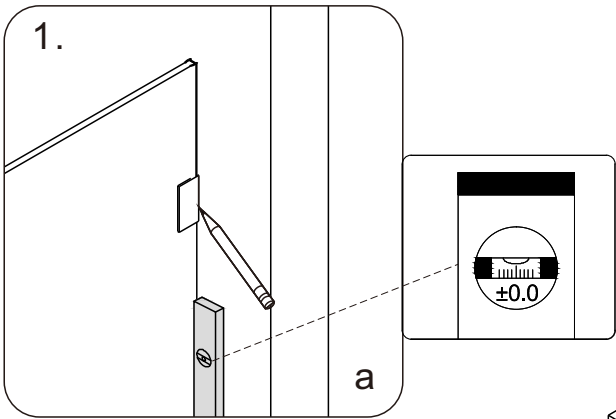






1. Place the glass door against the wall; use a level to check vertical alignment, then mark the outer edge of the glass fixing component (#4) with a pencil.
2. Remove the glass fixing component(#4).
3. Align the glass fixing component (#4)with the previously marked lines, then mark reference points on it with a pencil.

INSTALLATION STEPS

STEP 3-Secure the glass shower door

Parts Required:


Part No.	Description	Qty
4	Drywall Anchor	8
2	Glass Fixing Component	4
3	St4 * 30 Self Tapping	8
5	Set Screw	8

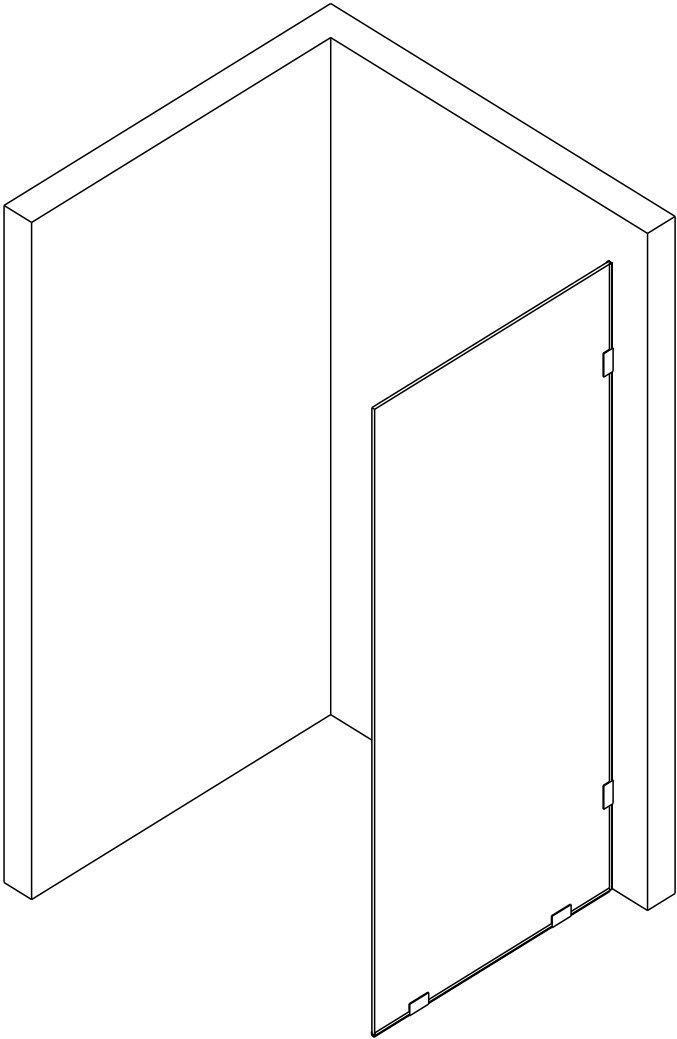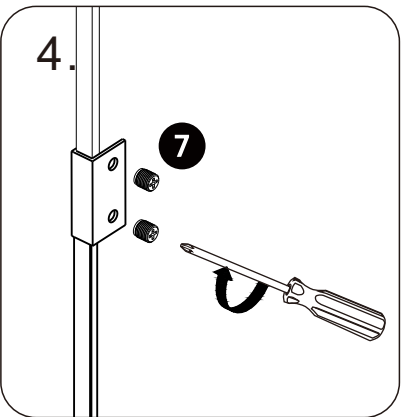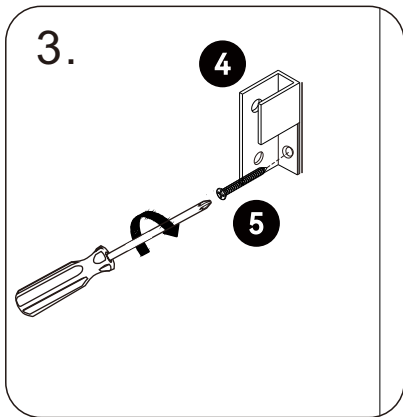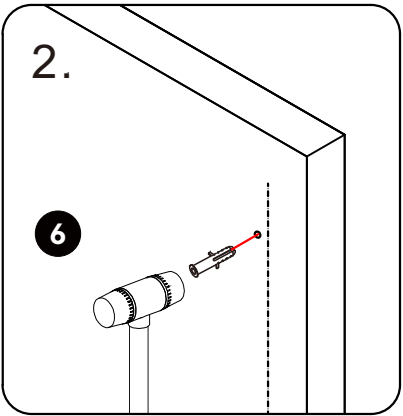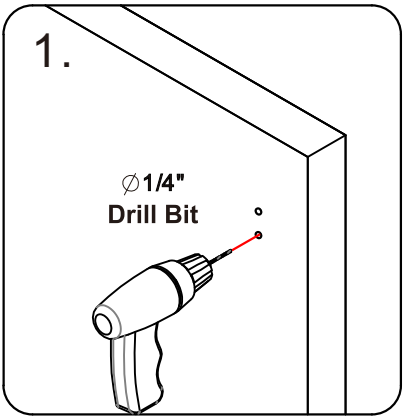

1. Drill holes at the marked points using an electric drill with a 1/4-inch drill bit.
2. Gently tap the wall anchors (Part#6) into the holes with a hammer.
3. Attach the glass fixing component(Part#4)to the wall by driving ST4 x 30 self-tapping screws (Part#5) with a Phillips screwdriver.
4. Secure the glass door (Part#1)to the wall by tightening the set screws (Part#7)with a Phillips screwdriver.

INSTALLATION STEPS

STEP 4 - Sealing (Before First Use)

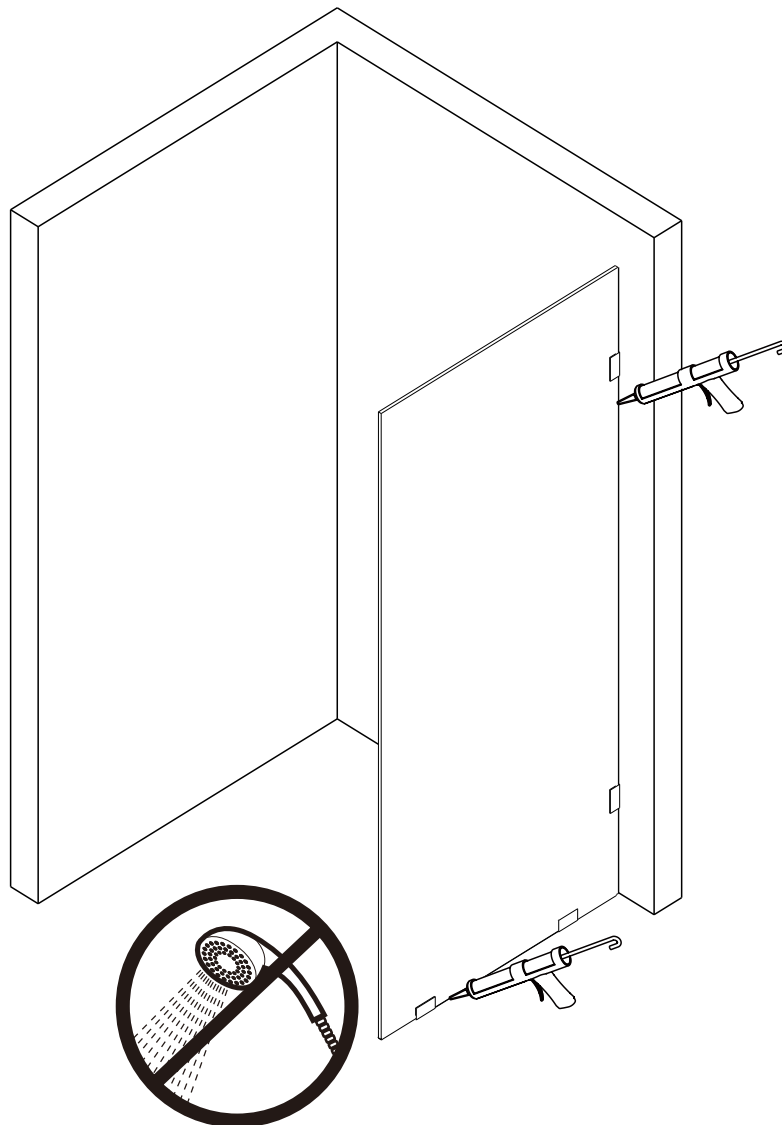

24 HOURS

Application Instructions:

Apply a continuous bead of clear, waterproof silicone sealant along:

- ✓ All wall joints
- ✓ Interior and exterior edges of the shower threshold

Curing Period:

Allow sealant to cure for 24 hours before shower use

Critical Precautions:

Avoid direct water contact with sealed areas for first 48 hours

Do not clean or touch sealed surfaces during curing period

Sealant Specifications:

⚠ Use only:

100% silicone sealant (bathroom grade)