



Parallel® | K-24805-JJ

Single-function showerhead, 1.25 gpm

Features

- Single-function showerhead with 48 nozzle 5" (127 mm) diameter sprayface
- Optimized sprayface for maximum performance
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.25 gpm (4.7 lpm) maximum flow rate at 45 psi (3.1 bar)
- Requires shower arm and flange (sold separately)
- Coordinates with other products in the Parallel collection



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|-------------------------------|
| CP | Polished Chrome |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-06-2026 19:03 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate
Shower/Rainhead Rated 1.25 gpm (4.7 l/min)
Maximum Flow:

Material

- Premium material construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-7397 Shower arm and flange, 7-1/2" long

Technology


- Katalyst® Plus air-induction technology infuses water with double the ratio of air to water as regular Katalyst®, creating even more invigorating droplets at a 1.25 gpm flow rate
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



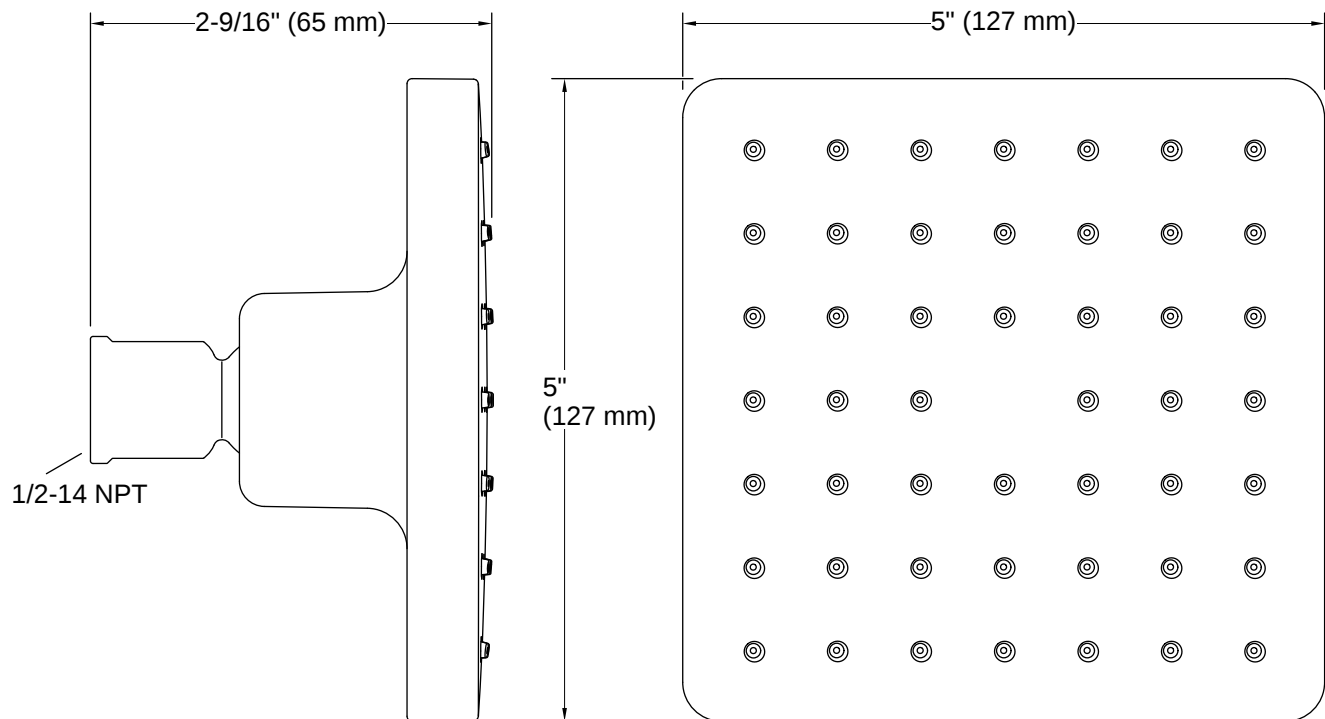

Installation

- 1/2" -14 NPT connection
- Wall-mount

Installation Notes

Install this product according to the installation instructions.

