KOHLER®

Features
- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides smooth, quiet sliding action.
- Gently curved towel bars, inside and outside, provide integrated storage on the door.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.

Installation
- Sliding bath door.
- Not for use in hospitality.

Recommended Products/Accessories
K-23723 Faucet cleaner

Included Components
Additional Components:
Hardware kit

Codes/Standards
CPSC 16CFR 1201
ANSI Z97.1

KOHLER® One-Year Limited Warranty
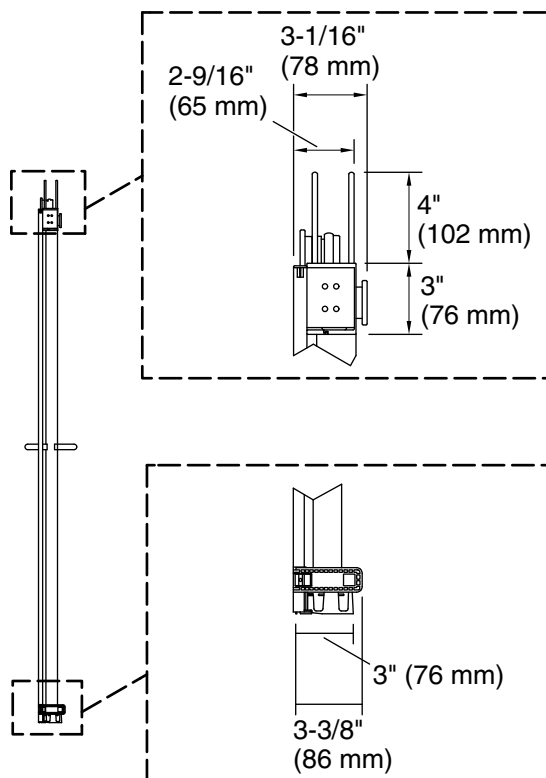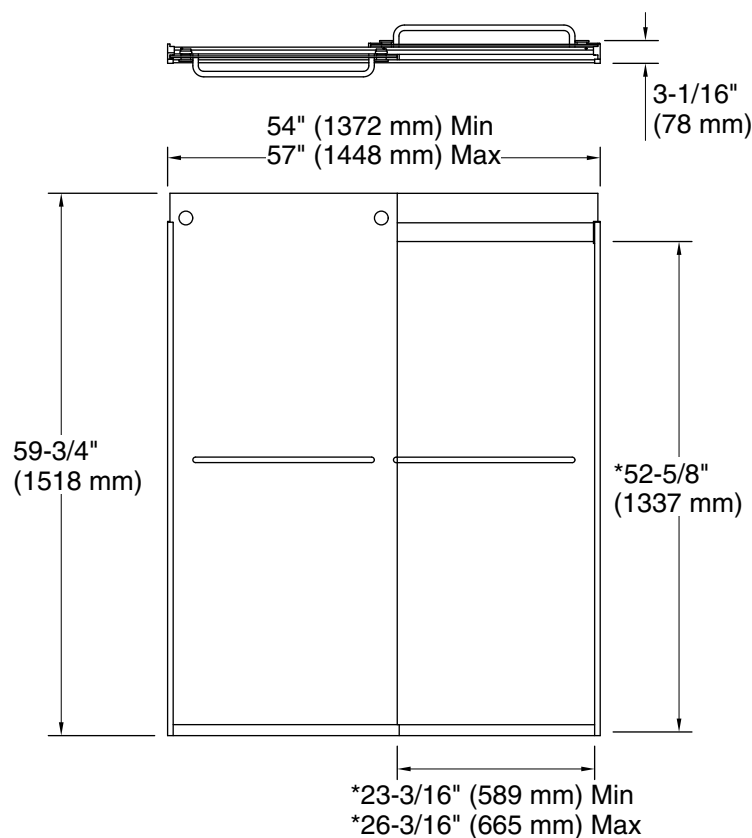See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	SH	Bright Silver
	MX	Matte Nickel
	ABV	Anodized Brushed Bronze
	ABZ	Anodized Dark Bronze
	BL	Matte Black

Available Glass Options
Code	Description
L	Crystal Clear

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.

THE BOLD LOOK
OF KOHLER®

54" (1372 mm) Min
57" (1448 mm) Max

3-1/16" (78 mm)

59-3/4" (1518 mm)

*52-5/8" (1337 mm)

*23-3/16" (589 mm) Min
*26-3/16" (665 mm) Max

3-1/16" (78 mm)

2-9/16" (65 mm)

4" (102 mm)

3" (76 mm)

3" (76 mm)

3-3/8" (86 mm)

*Walk-through

Technical Information
All product dimensions are nominal.

Installation type:	For bath installation
Opening style:	Sliding/Bypass
Opening Width - Min:	54" (1372 mm)
Opening Width - Max:	57" (1448 mm)
Walk-through - Min:	23-3/16" (589 mm)
Walk-through - Max:	26-3/16" (665 mm)
Base-To-Wall Radius – Max:	1/2" (13 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

Notes
Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 62-1/4" (1581 mm) to allow for installation clearance.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.

THE BOLD LOOK OF KOHLER®