

Anchor Kit Installation Instructions

1) Push tip of Anchor Stake into ground.


Then twist Anchor Stake into ground using the leverage of a pry-bar, large screwdriver, or similar item.

Twist Anchor Stake into ground so that “eye” at end of Anchor Stake is approximately 1 inch above the ground. Open end of “eye” should be facing away from horizontal leg piece.

CAUTION: Before installing the Anchor Stakes, be sure that there are no underground utilities (such as electrical, gas, phone, water, and sprinkler) beneath where you are going to install the Anchor Stakes.

Ground types vary. You may need to wet the ground thoroughly where you will be placing the Anchor Stake.

Anchor Stake should be installed near center of horizontal leg on trampoline and should be as close to horizontal leg piece as possible, allowing for the Anchor Strap to easily reach it.

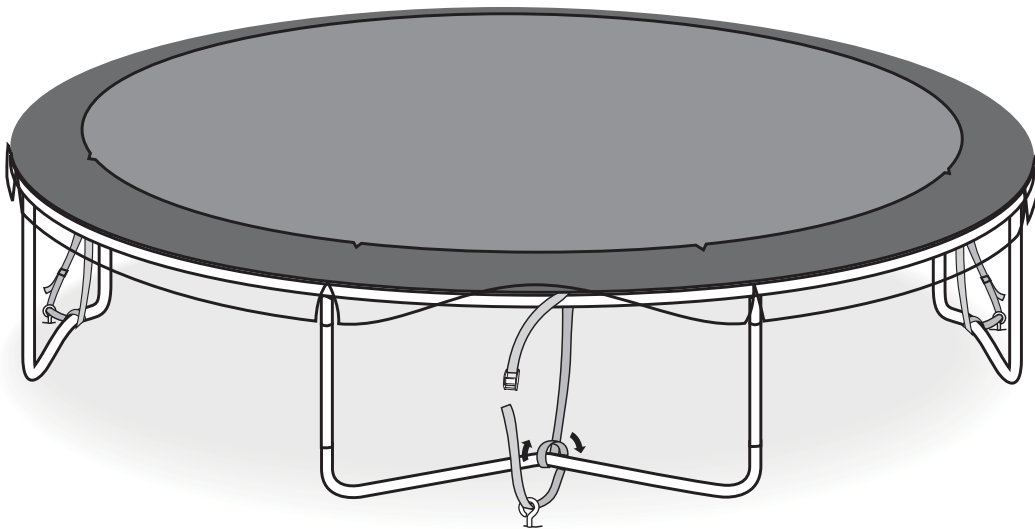

2) Position Anchor Strap at center of horizontal leg piece on trampoline.

As shown, wrap the strap over top rail of trampoline, once around the base of the leg, so that the leg is held to the frame, through the anchor, and feed through buckle.

Repeat Steps at the 3 remaining horizontal legs.

3) To remove the anchor kit, follow the Installation Instructions in reverse order.