


INSTRUCTION MANUEL ENCLOSED

SEATING 4PC

SEATING 4PC ASSEMBLY INSTRUCTION

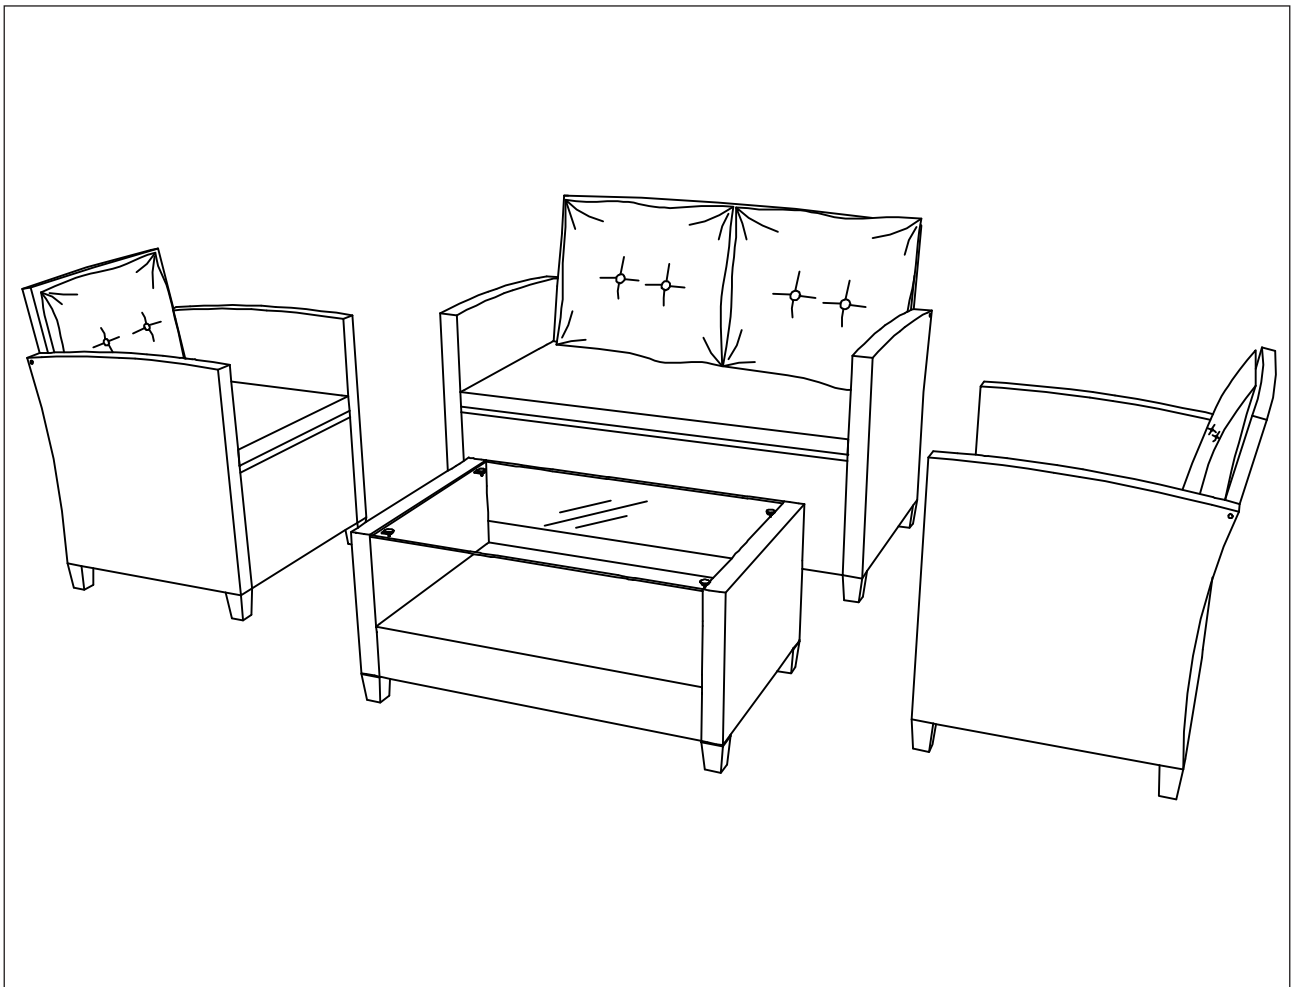

PARTS LIST





















Part	Description	Quantity
------	-------------	----------

PARTS


A	Left arm	3
B	Right arm	3
C	Chair backrest	2
D	Chair seat base	2
E	Table leg	2
F	Table side panel	1
G	Glass table top	1
L	Chair side panel	2
M	Chair cushion	2
O	Pillow	4
Q	Bench backrest	1
S	Bench seat base	1
U	Bench side panel	1
Z	Bench cushion	1

HARDWARE


1	Bolt M6x70 mm	12
2	Bolt M6x25 mm	38
3	Washer Ø6x14x1 mm	50
4	Bolt M6x55 mm	16
5	Plastic leg 48x48x65 mm	16
6	Allen key 4x60 mm	3

A  x3	B  x3	C  x2	D  x2
E  x2	F  x1	G  x1	L  x2
M  x2	O  x4	Q  x1	S  x1
U  x1	Z  x1	1  M6x70 mm x12	2  M6x25 mm x38
3  Ø6 x 14 mm x50	4  M6x55 mm x16	5  x16	6  Alenkey 4 x 60 x3


1. Locate each Left arm (A) and Right arm (B) to the Chair backrest (C) by the pre-drilled threads. Use Allen Key (6) to fasten Bolts (1) with Washers (3). Each arm should have 2 bolts fastened. Only fixed bolts 50% (Photo 1).

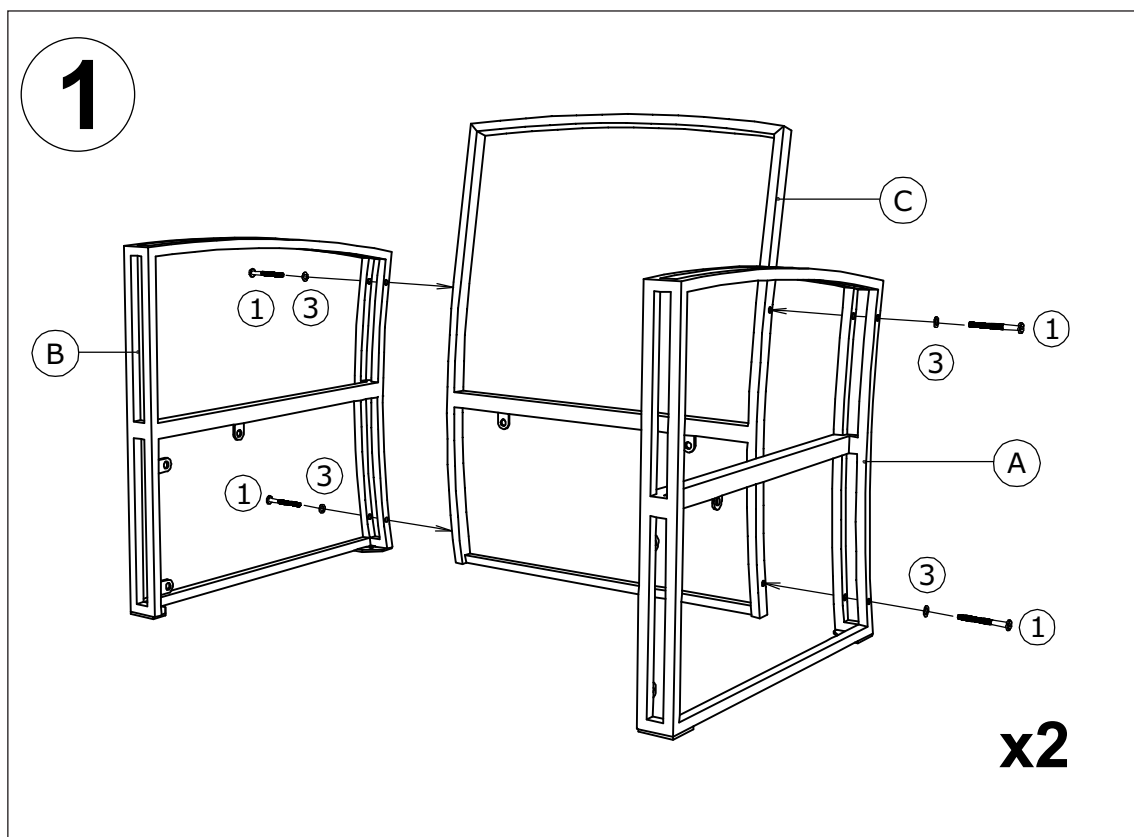


2. Locate Chair seat base (D) to the Chair backrest (C) and Left arm (A), Right arm (B) by the pre-drilled threads. Use Allen Key (6) to fasten Bolts (2) with Washers (3). Should have 4 bolts fastened. Only fixed bolts 50% (Photo 2).

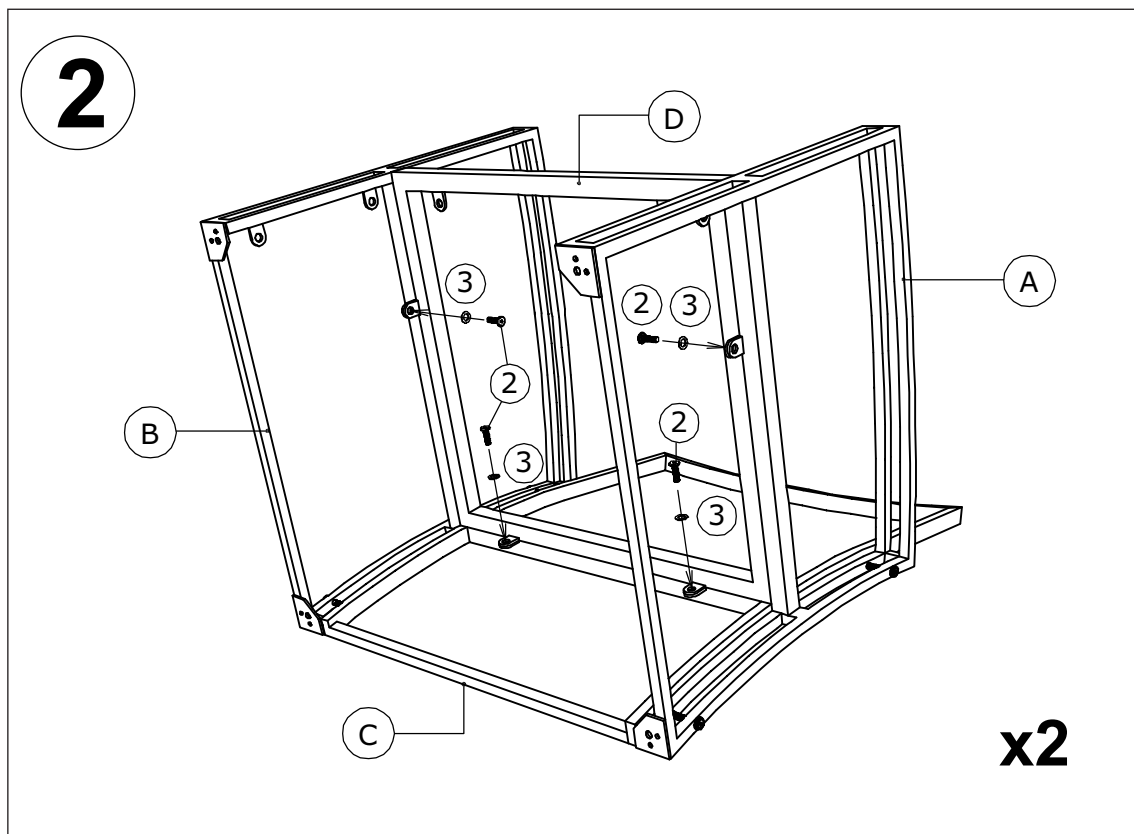


3. Locate Chair side panel (L) to Left arm (A) and Right arm (B), by the pre-drilled threads. Use Allen Key (6) to fasten Bolts (2) with Washers (3). Should have 4 bolts fastened. Only fixed bolts 50% (Photo 3).

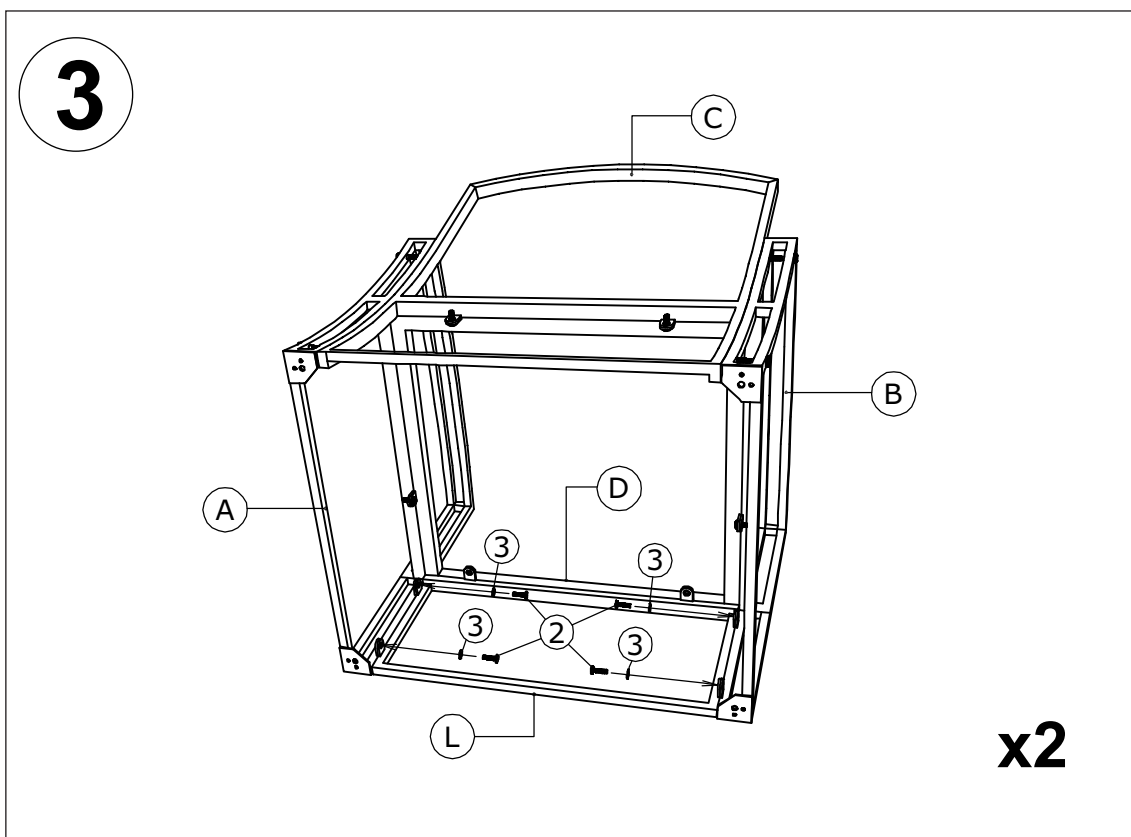


4. Locate Chair side panel (L) to Chair seat base (D), by the pre-drilled threads. Use Allen Key (6) to fasten Bolts (2) with Washers (3). Should have 2 bolts fastened. Only fixed bolts 50% (Photo 4).

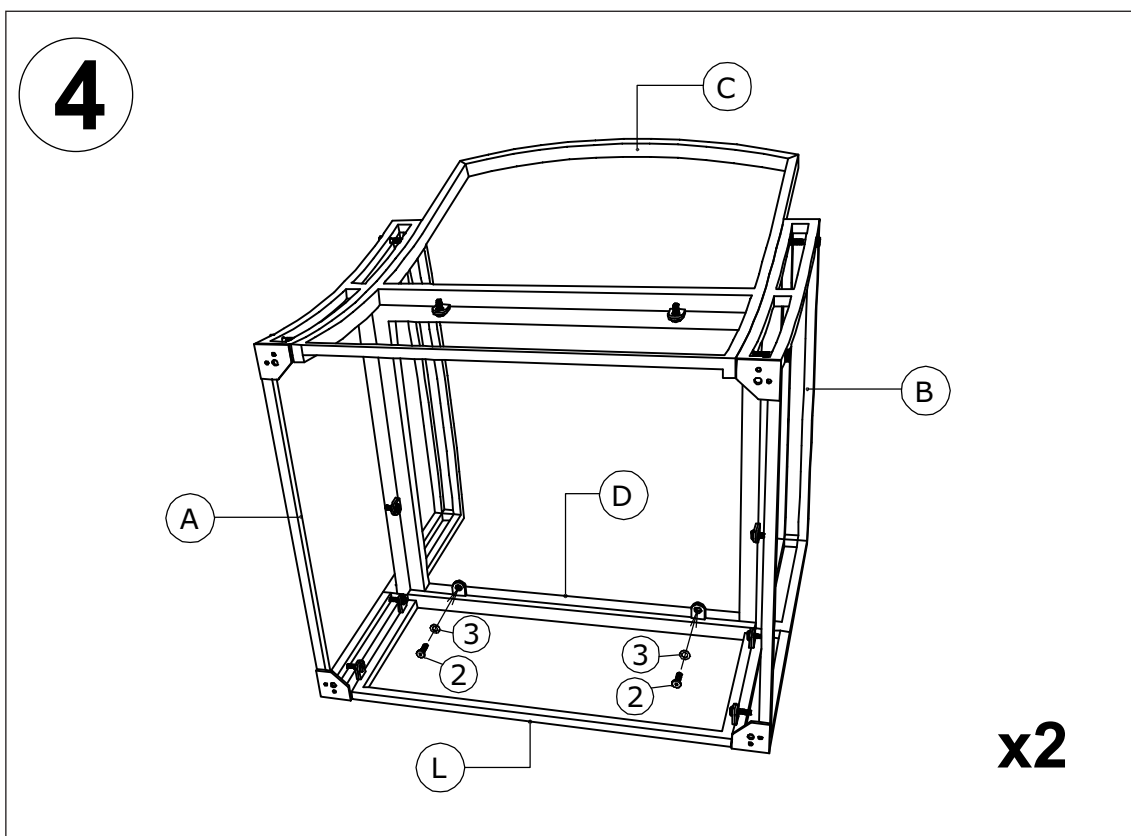


5. Use Allen Key (6) to fasten Bolts (4) with Plastic leg (5). Should have 4 bolts fastened.
Fixed bolts 100% (Photo 5).

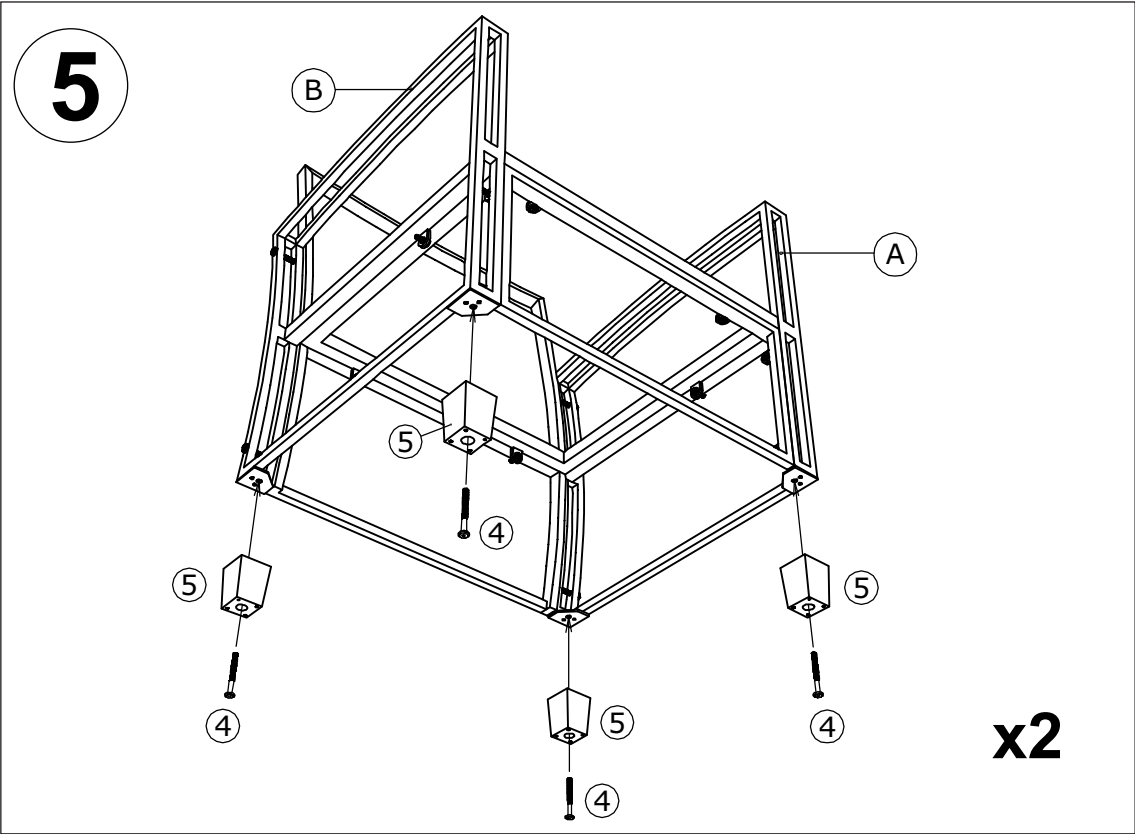


6. Fixed all bolts 100% (Photo 6).

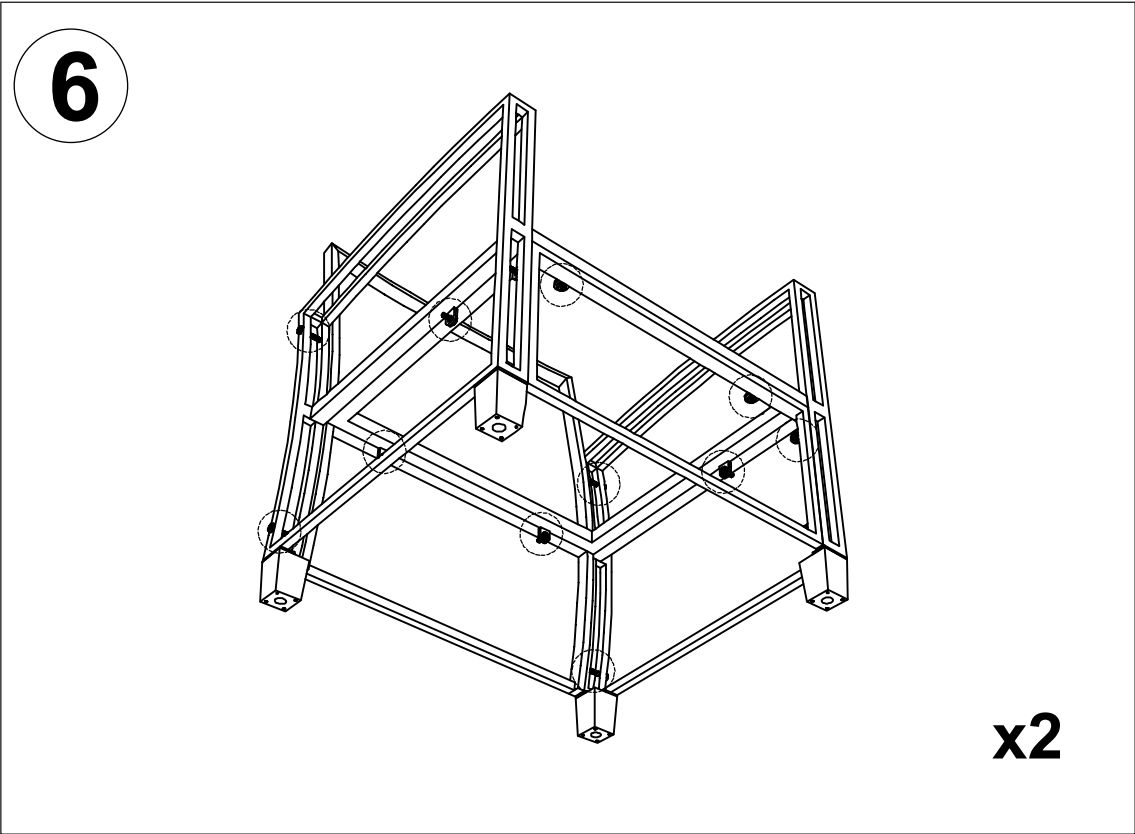

7. Place Chair cushion (M) on the top chair first, and then place Pillow (O) above it (Photo 7).

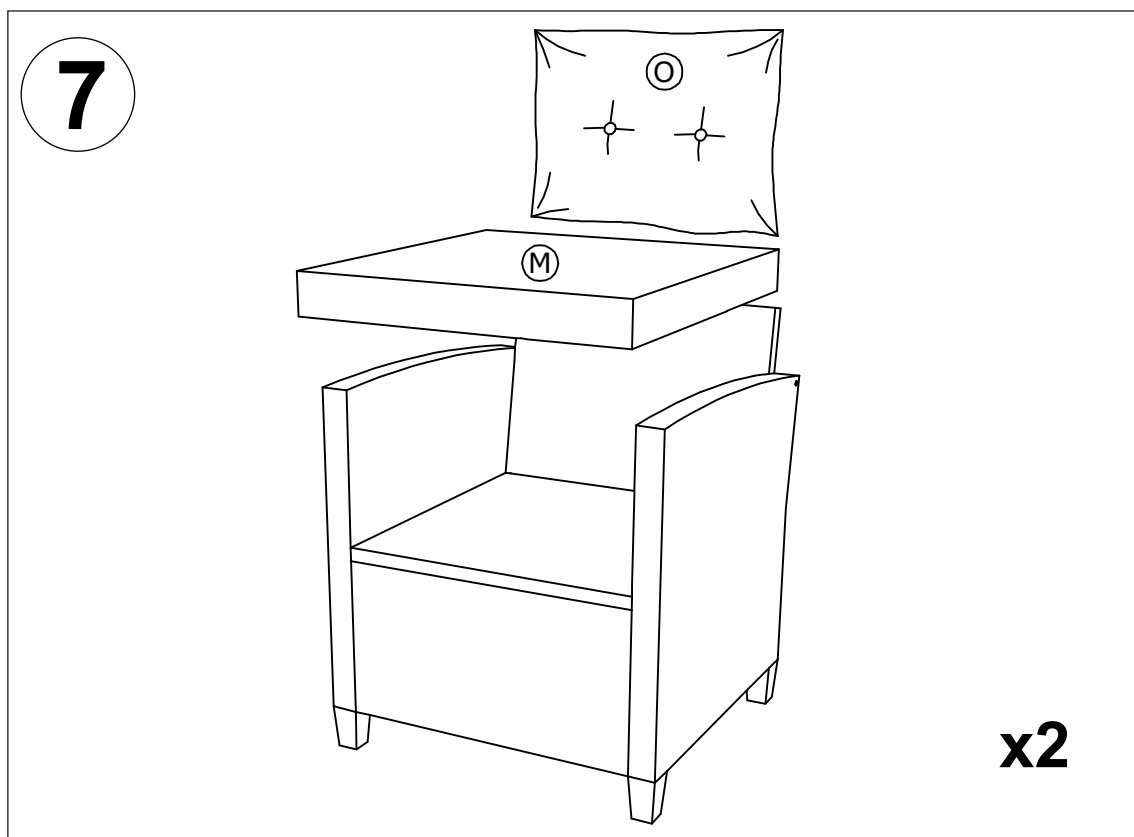


8. Locate each Left arm (A) and Right arm (B) to the Bench backrest (Q) by the pre-drilled threads. Use Allen Key (6) to fasten Bolts (1) with Washers (3). Each arm should have 2 bolts fastened. Only fixed bolts 50% (Photo 8).

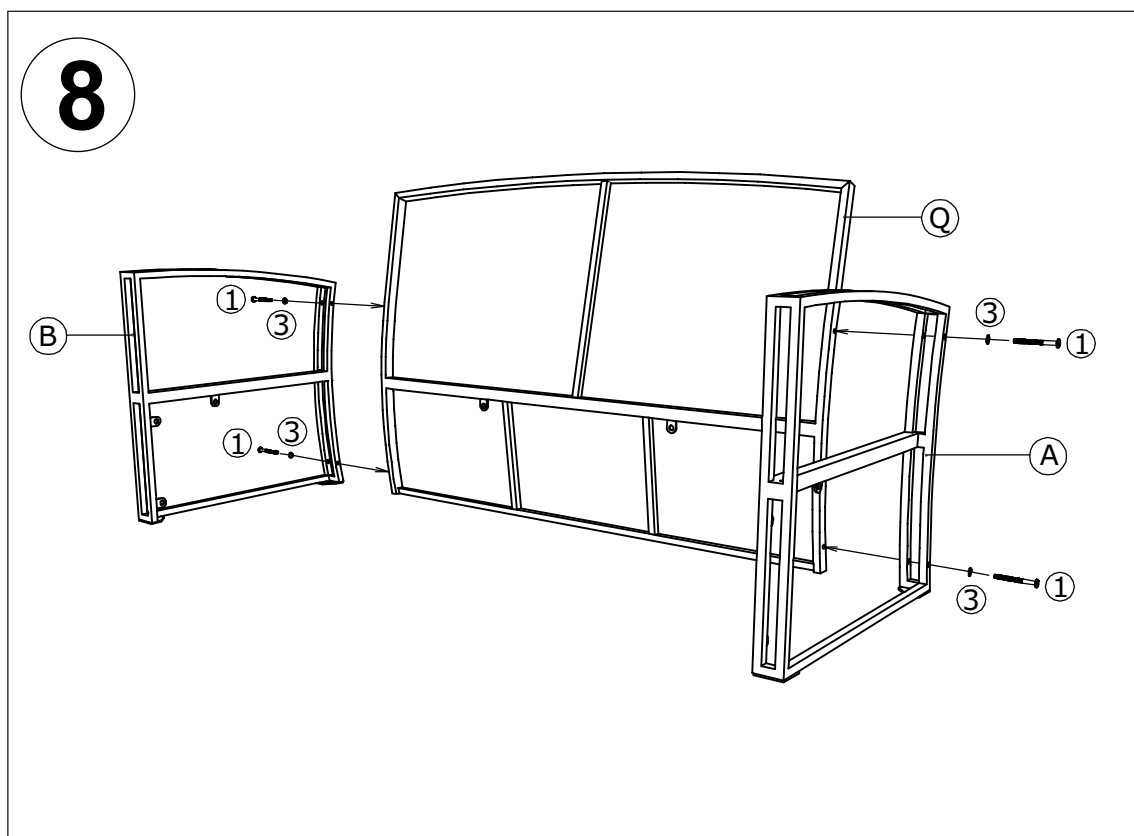

9. Locate Bench seat base (S) to the Bench backrest (Q) and Left arm (A), Right arm (B) by the pre-drilled threads.

Use Allen Key (6) to fasten Bolts (2) with Washers (3). Should have 4 bolts fastened.


Only fixed bolts 50% (Photo 9).

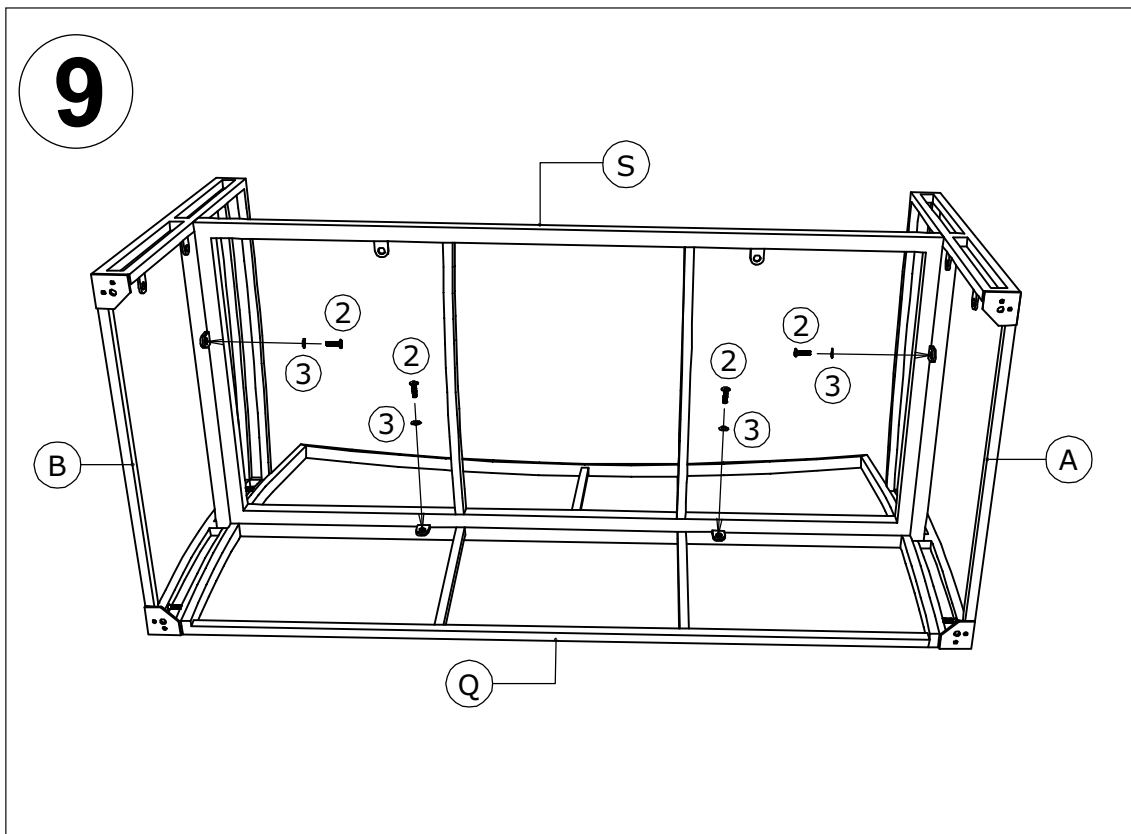


10. Locate Bench side panel (U) to Left arm (A), Right arm (B) and Bench seat base (S) by the pre-drilled threads.

Use Allen Key (6) to fasten Bolts (2) with Washers (3). Should have 6 bolts fastened.


Only fixed bolts 50% (Photo 10).

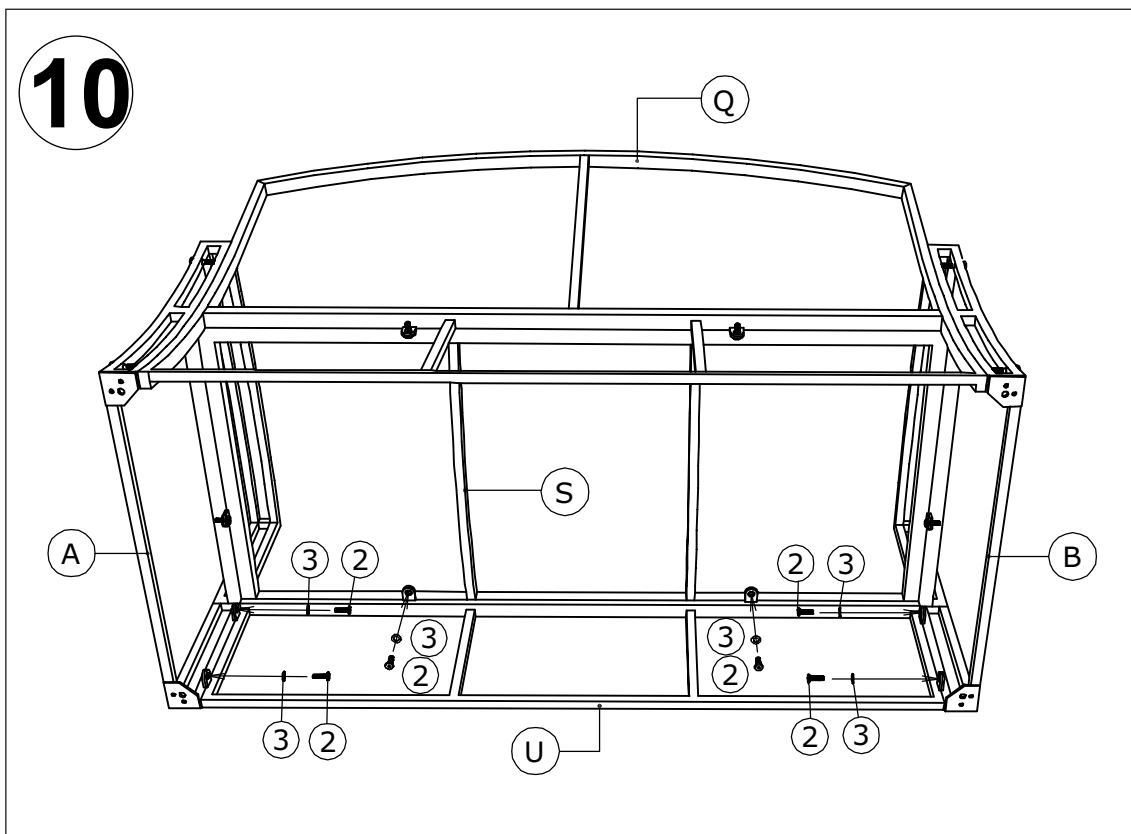

11. Use Allen Key (6) to fasten Bolts (4) with Plastic leg (5). Should have 4 bolts fastened.
Fixed bolts 100% (Photo 11).

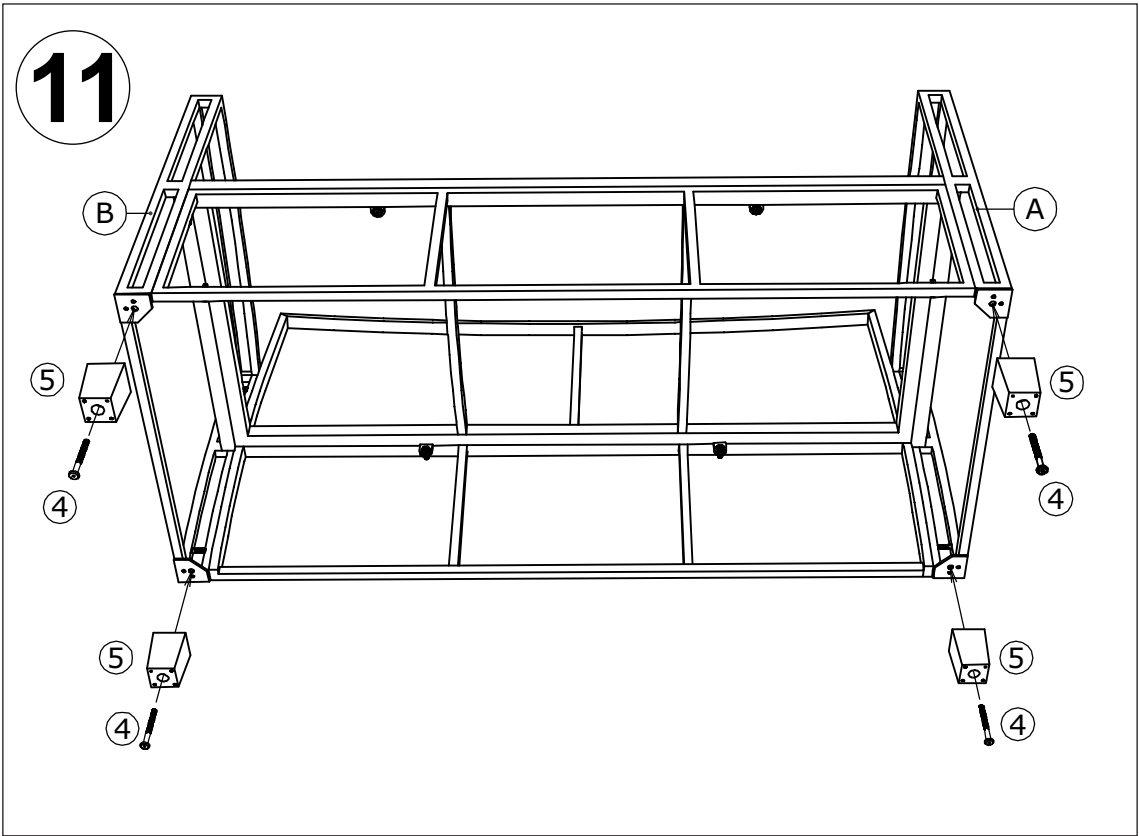


12. Fixed all bolts 100% (Photo 12).

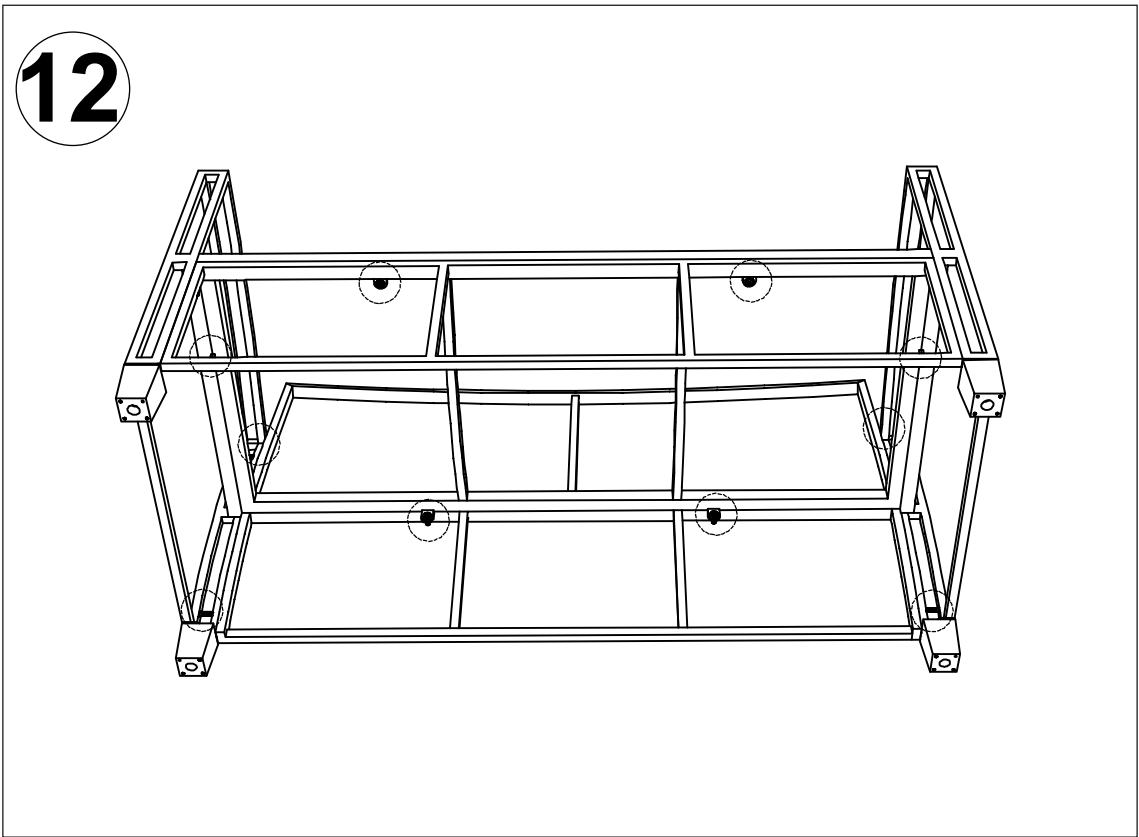


13. Place Bench cushion (Z) on the top bench first, and then place 2 Pillow (O) above it (Photo 13).




14. Locate Table leg (E) to the Table side panel (F) by the pre-drilled threads.
Use Allen Key (6) to fasten Bolts (2) with Washers (3). Each table foot should have 4 bolts fastened.
Only fixed bolts 50% (Photo 14).

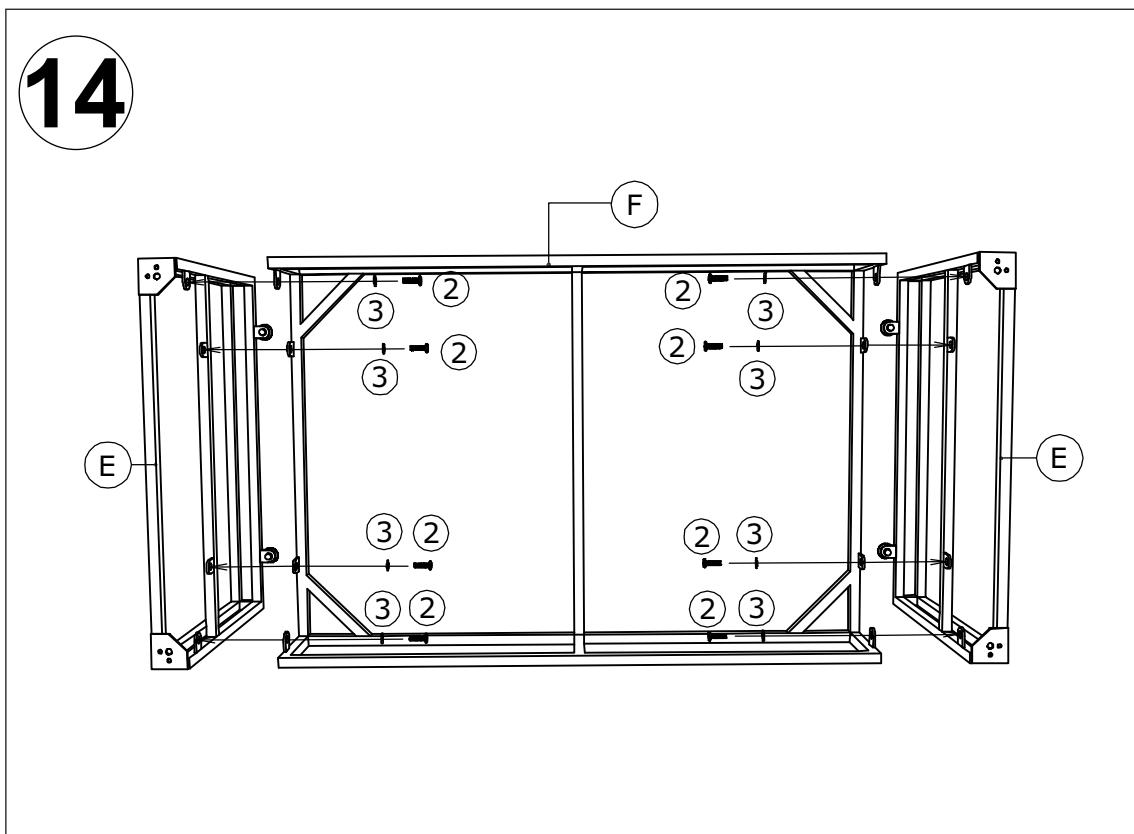

15. Use Allen Key (6) to fasten Bolts (4) with Plastic leg (5). Each table leg should have 2 bolts fastened. Fixed bolts 100% (Photo 15).

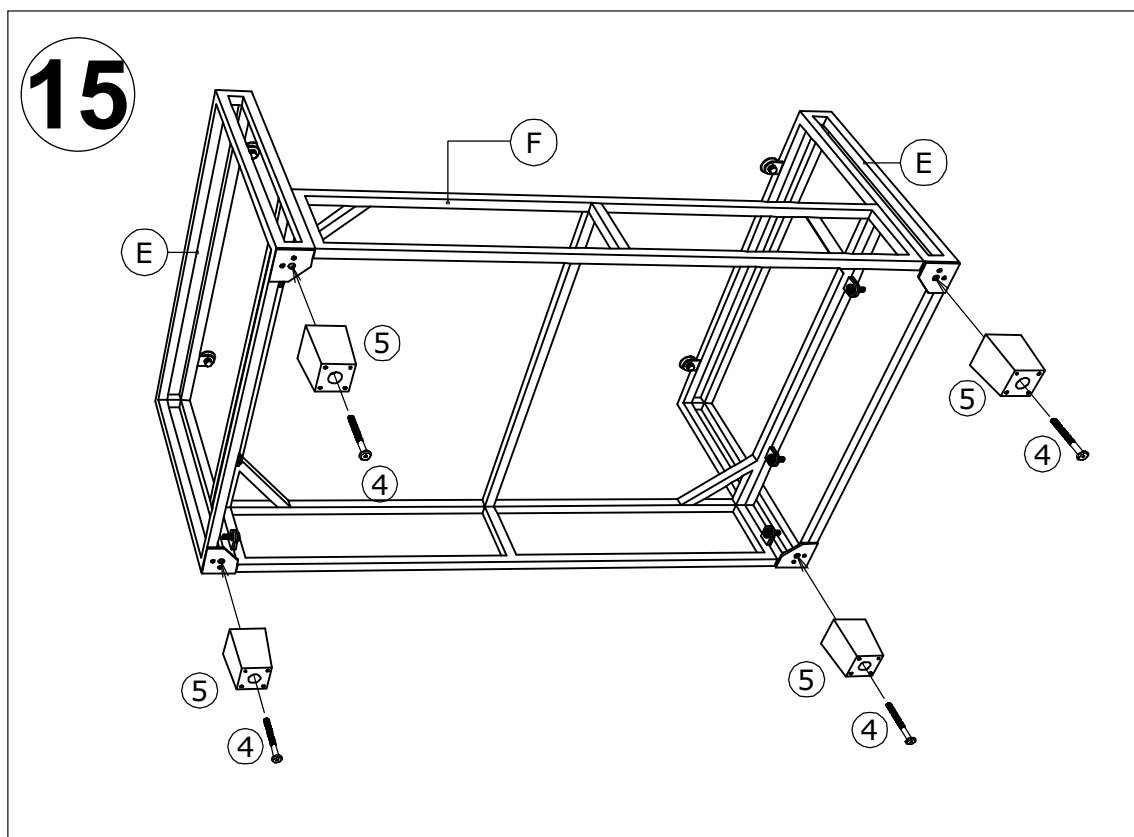

16. Place Glass on the top table (Photo 16).

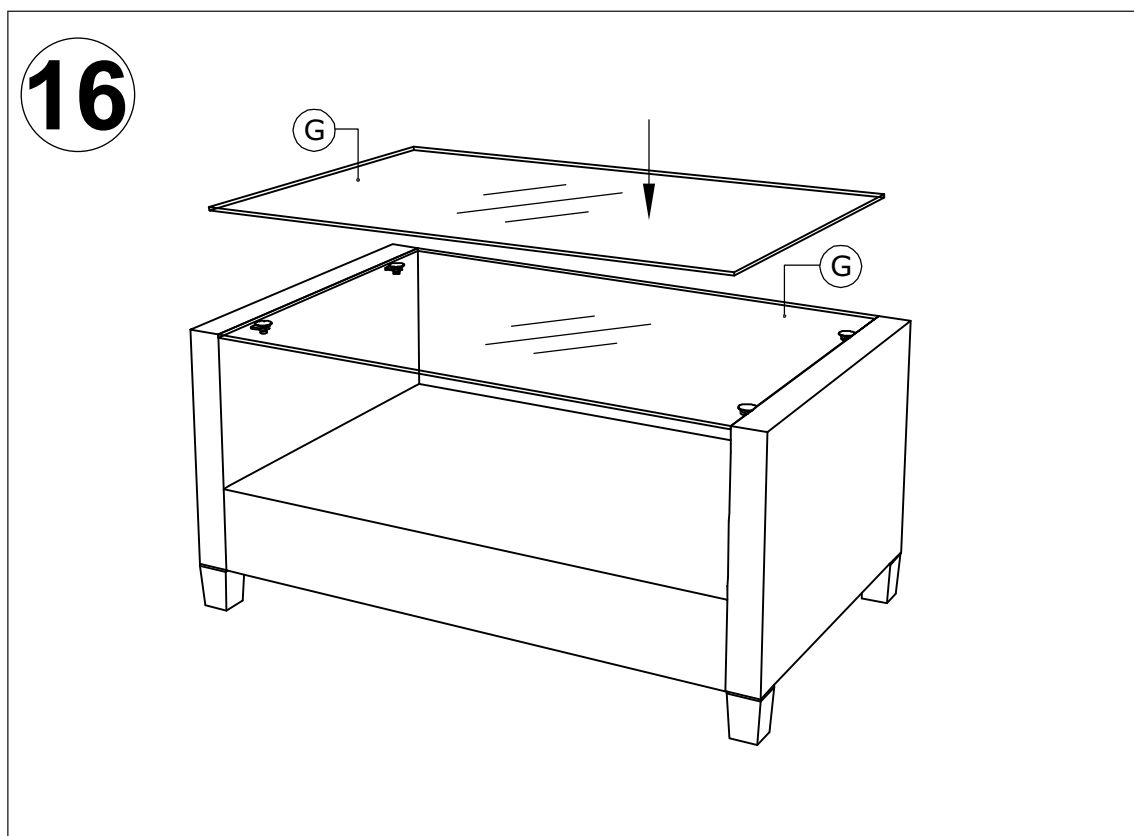

Till now you have finished the whole assembly and enjoy your furniture!