

John Richard

Assembly Instructions


Item# AJC 9282

Thank you for purchasing this quality product. Be sure to check all packing materials carefully for small parts that may have some loose inside the carton during shipment.

Carefully unpack and inspect each piece of your new chandelier. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware. To Prevent the Risk of Injury do not attempt to install this if any piece is missing or damaged.

IMPORTANT: FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX. WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF. This light fixture requires installation by a person familiar with the codes and restrictions in your area. We recommend installation by a licensed electrician.

***Caution: Please carefully read all instructions before starting the assembly process. These parts are cumbersome and heavy. For your safety, two people are required for proper assembly and installation. This fixture has been rated for up to Fifteen (15) 25-Watt maximum G9 bulbs (included).

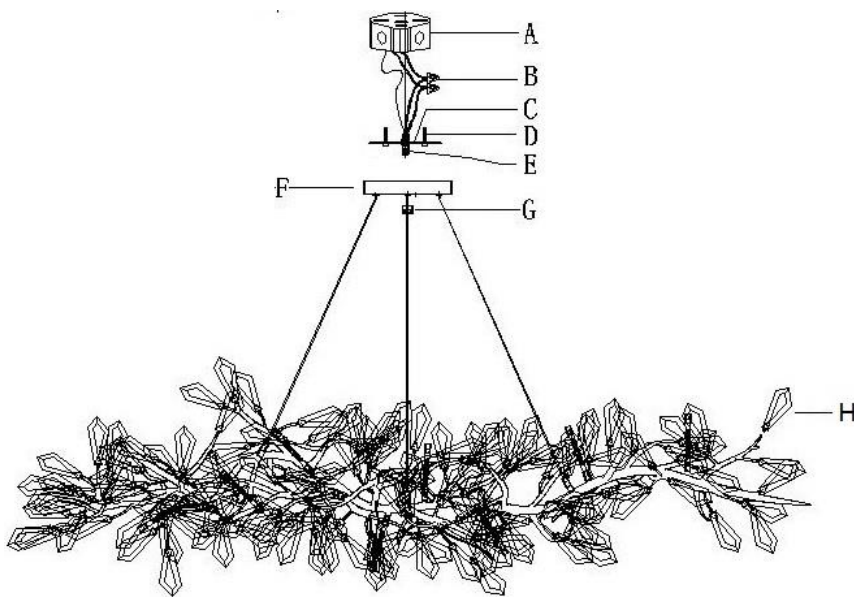

Assembly Step:

1. Please attach Cross Bar(C)to Outlet(A) with Screw(D).
2. Please connect the wire and then cover the tie-in with Wire nut(B).
3. Please attach the Canopy(F) underneath the ceiling with Round Ring(G).
4. Please attach the 170 PCS crystal parts(H) to body.
5. Recommend bulb wattage: 40-watt max, 14 type G9 Bulbs.

**NOTE: DO NOT EXCEED
RECOMMENDED WATTAGE.**