

ACT3011 - Dual Handle Monobloc

Product Finish: Chrome

EAN13 barcode: 5060344158862



Product features:

- Metal construction throughout
- Quarter turn handle action for precise flow control
- Custom designed for lower to mid pressures
- Supplied complete with flexible tail pipes for fast simple fitting
- Luscious quality chromium plate finish


Additional information / Parts included:

1 x metal horseshoe, 1 x rubber horseshoe, 1 x fixing nut, 1 x rubber seal

Primary WRAS fittings number (see www.wras.co.uk):

2103308

Product dimensions:

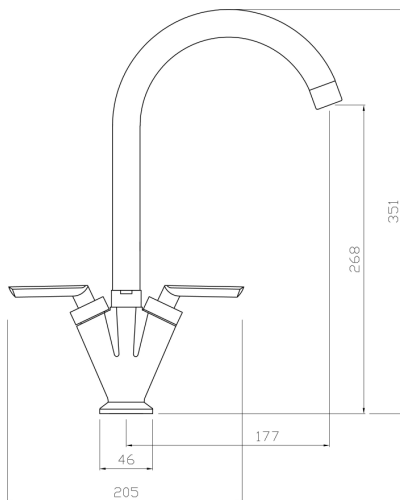


- Overall Height / projection: 351 mm
- Exit reach: 177 mm
- Exit height: 268 mm
- Centre distance(s): n/a
- Base diameter(s): 46 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 80 mm
- Spout diameter: n/a mm
- Spout aerator size: 22 x 1

Packaged properties:

Box length: 370 mm
Box width: 235 mm
Tap only weight: 0.94 kg

Box depth: 60 mm
Units per outer: 10
Boxed weight: 1.43 kg

Product flow characteristics:

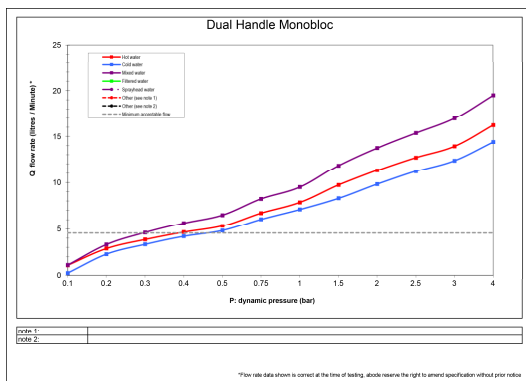

- Min / Max water pressure: 0.30 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 16.97

- Control valve type: 1/2" ceramic disc, quarter turn operation
- Flow characteristics: Single Flow
- Non return valve(s): Yes, integral to cold flexi

- Aerator type: Honeycomb
- Spout connection method: Locking Collar

- Tail pipe inlet / outlet size: M10 / 1/2" bsp female
- Inlet pipe type / length: flexible stainless braided hose / 370 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year