


Assembly & Installation Instructions

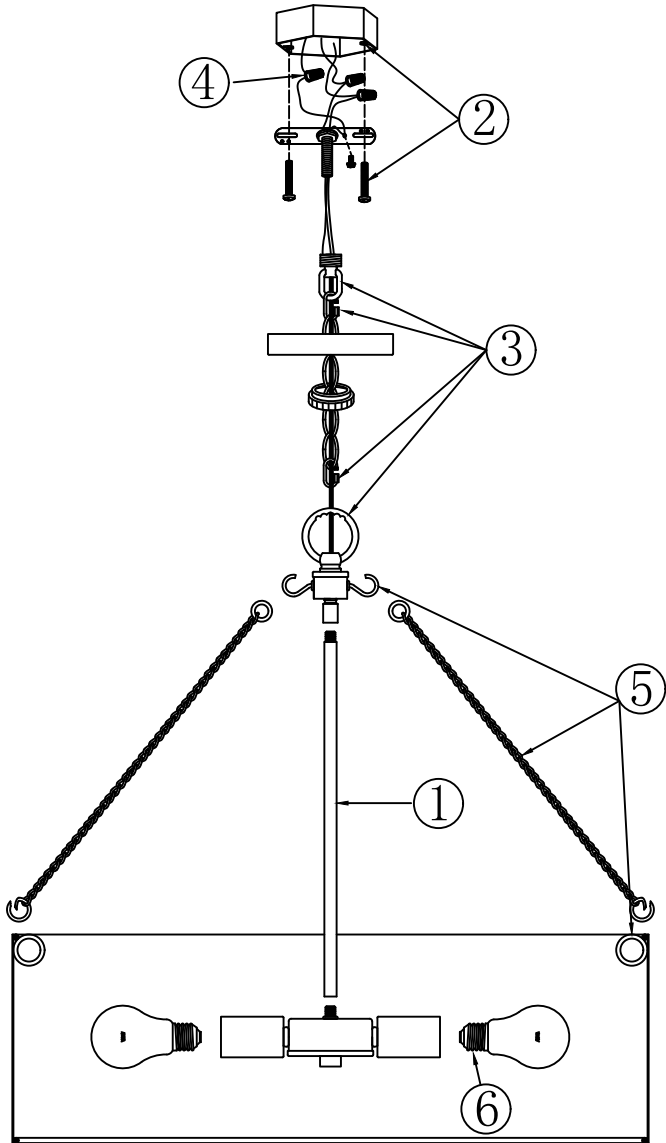

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Secure both ends of the suspension rod to the threaded joint on the upper part of the lamp holder and the sloped ceiling adapter under the lifting ring respectively.
2. Secure the mounting bracket to the junction box by using the mounting screws.
3. Connect one end of the quick links to the lifting ring, and attach the other end to the screw collar loop. Fasten the quick links to secure them in place.
Pass the fixture's wires through the lifting ring, the chain, the ring with wireway (the outer ring of the screw collar loop), the screw collar loop, and the canopy.
Pull the wire tight, then slide the ring with wireway and the canopy onto the chain.
4. Connect the wires by using the wire caps as follows:
Connect the fixture's LIVE wire to the home LIVE wire.
Connect the fixture's NEUTRAL wire to the home NEUTRAL wire.
Connect the fixture's ground wire to the home ground wire.
Secure the fixture's ground wire to the mounting bracket with the green grounding screw.
Then, tuck all wires into the junction box.
*Note: make sure no bare wires are exposed to prevent electric leakage.
Pass the canopy through the screw collar loop, press it tightly against the ceiling, then fasten and secure it with the ring with wireway.
5. Hang both ends of the decorative chain on the middle rod and the iron ring of the lampshade respectively.
6. Install the bulb (not included) then restore the power to test it.