
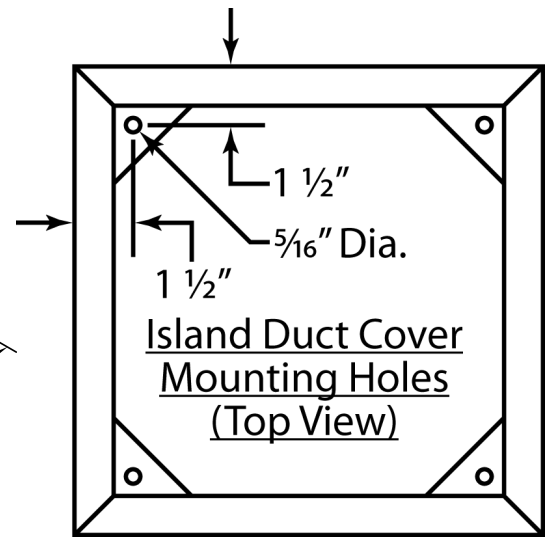


### EPIH18-242


Halogen lights. This model is not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes.

#### Dimensional Information


|               |       |
|---------------|-------|
| Width         | 42    |
| Depth         | 30.0  |
| Height        | 18.0  |
| CFM @ 0.0" SP | 550.0 |
| Sones         | 6.0   |
| Amps          | 4.9   |
| # Lights      | 4.0   |

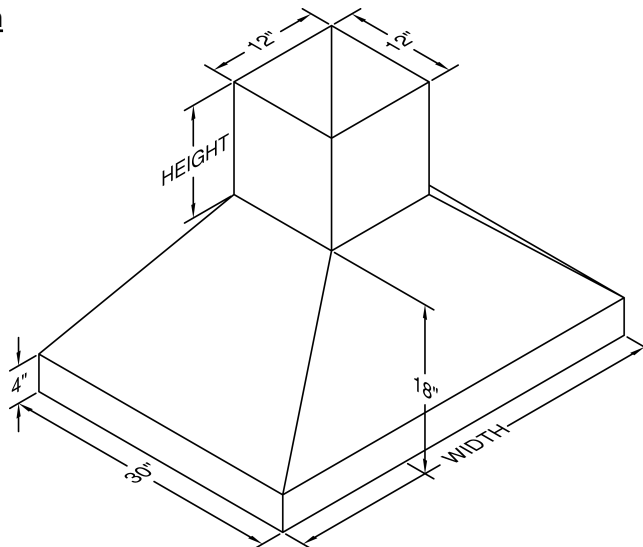

#### Connection Diagram

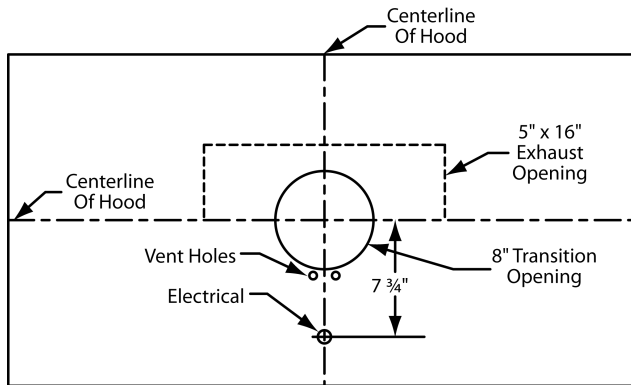


550 CFM T200 Dual Blower (Top View)

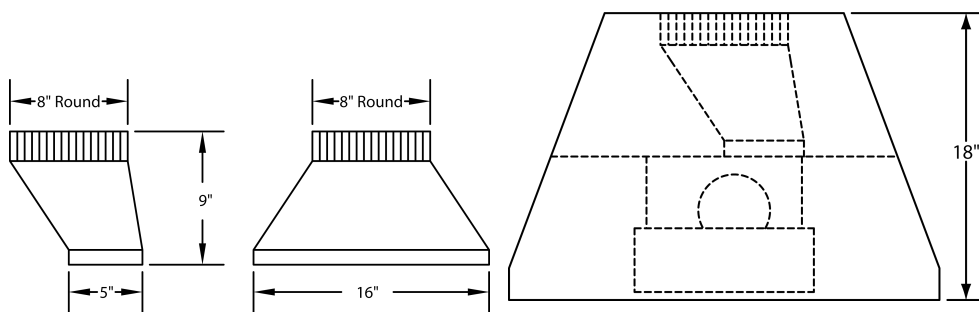

VP565 Standard Transition (Included)

Transition Installed (Side View)

#### Recommended Mounting Height\*

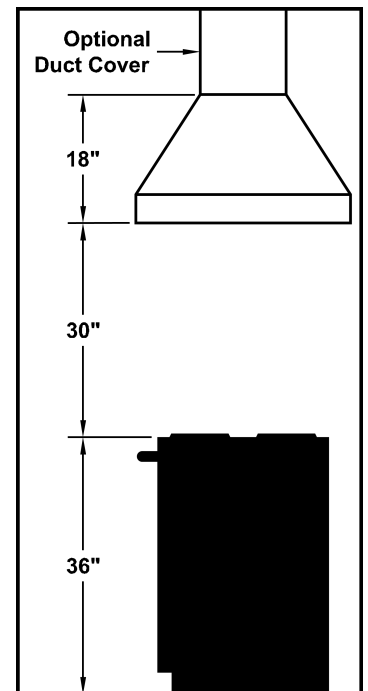

\*Exceeding recommended mounting height may compromise performance.

#### Electrical/Mechanical Specifications For Blower Unit

| Model            | Volts | Amps* | Hz   | RPM    | CFM SP@0.0" | Equivalent CFM | CFM SP@0.1" | CFM SP@0.2" | CFM SP@0.3" | Minimum Round Duct Size | Sones <sup>#</sup> |
|------------------|-------|-------|------|--------|-------------|----------------|-------------|-------------|-------------|-------------------------|--------------------|
| T200 Island Dual | 115.0 | 2.9   | 60.0 | 1550.0 | 550.0       | 900.0          | 507.0       | 471.0       | 431.0       | 8" (50 sq. in.)         | 6.0                |

+ This model is equipped with halogen lighting (one in each corner).

\$ Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

# Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.