


INSTRUCTION MANUAL

Thank you for your purchase, Please consult the installation instructions.

PARTS LIST

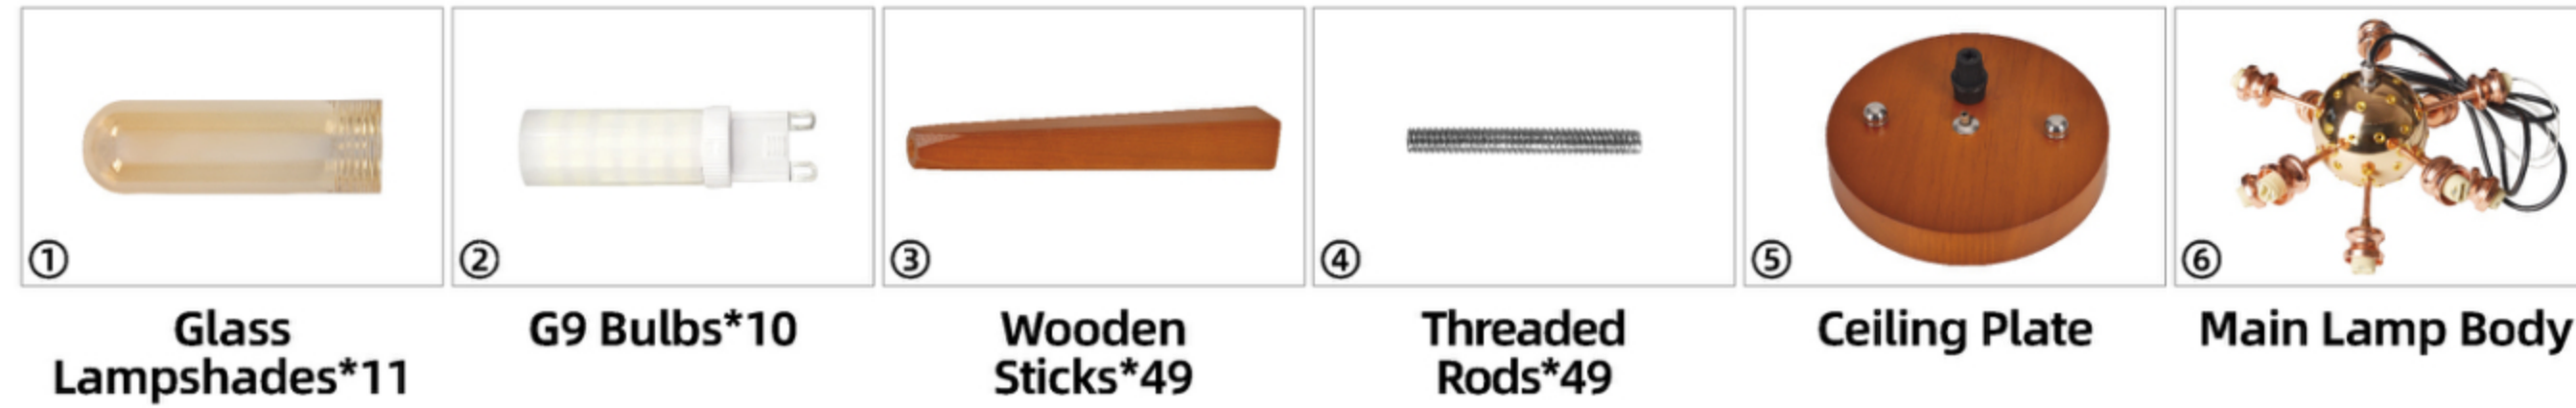

THE INSTALLATION STEPS



01 Open the box, take out 10 glass lampshades, 10 G9 bulbs, the ceiling plate and the main lamp body, and place them aside.




02 Insert the G9 bulbs into the poles of the 10 main lamp bodies. It is recommended to test by powering them on to check if all are fully lit.



03 Tighten the 10 glass lampshades onto the 10 main lamp bodies in a clockwise direction.




04 Take out the wooden sticks from the bottom of the box, and use the threaded rods to tighten them into the threaded hole at the smaller end of each wooden stick. Ensure one threaded rod is fastened to each wooden stick.

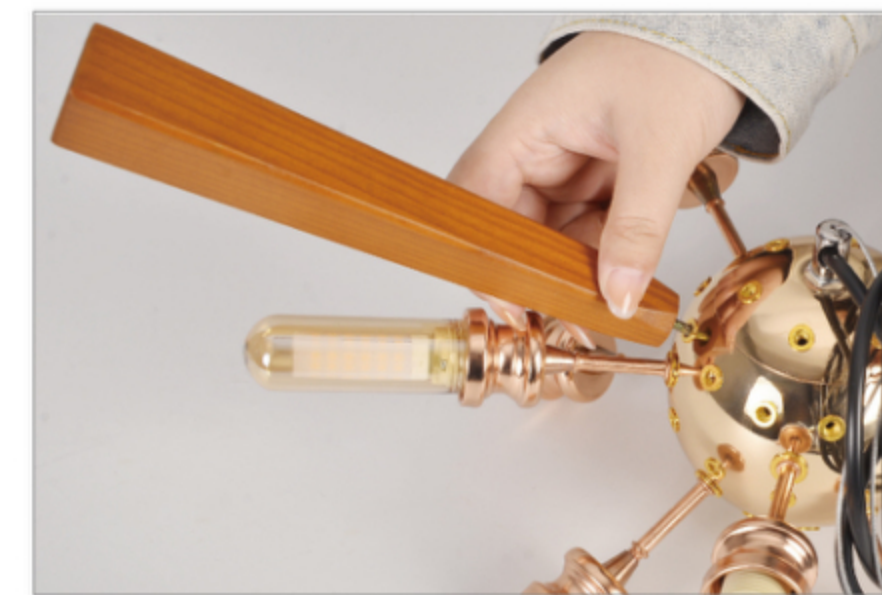

05 Then align the wooden sticks (with threaded rods attached) with the holes on the main lamp bodies, screw them in and tighten securely. Ensure that every hole on all the main lamp bodies is fitted with a wooden stick equipped with a threaded rod.



06 Insert the steel wire rope into the center of the ceiling plate.

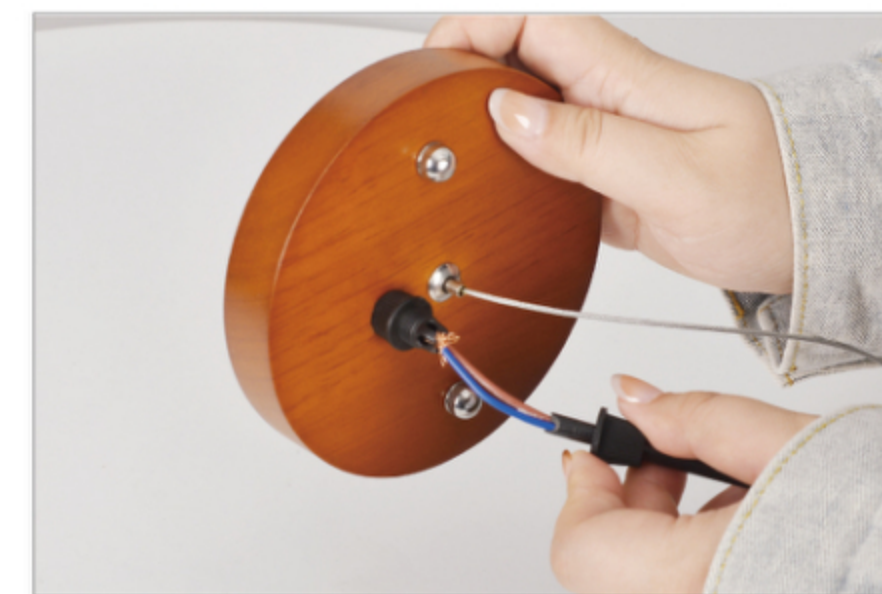


07 Pass the electrical wires through the ceiling plate and tighten the fixing screws to secure them.


INSTRUCTION MANUAL

Thank you for your purchase, Please consult the installation instructions.

PARTS LIST

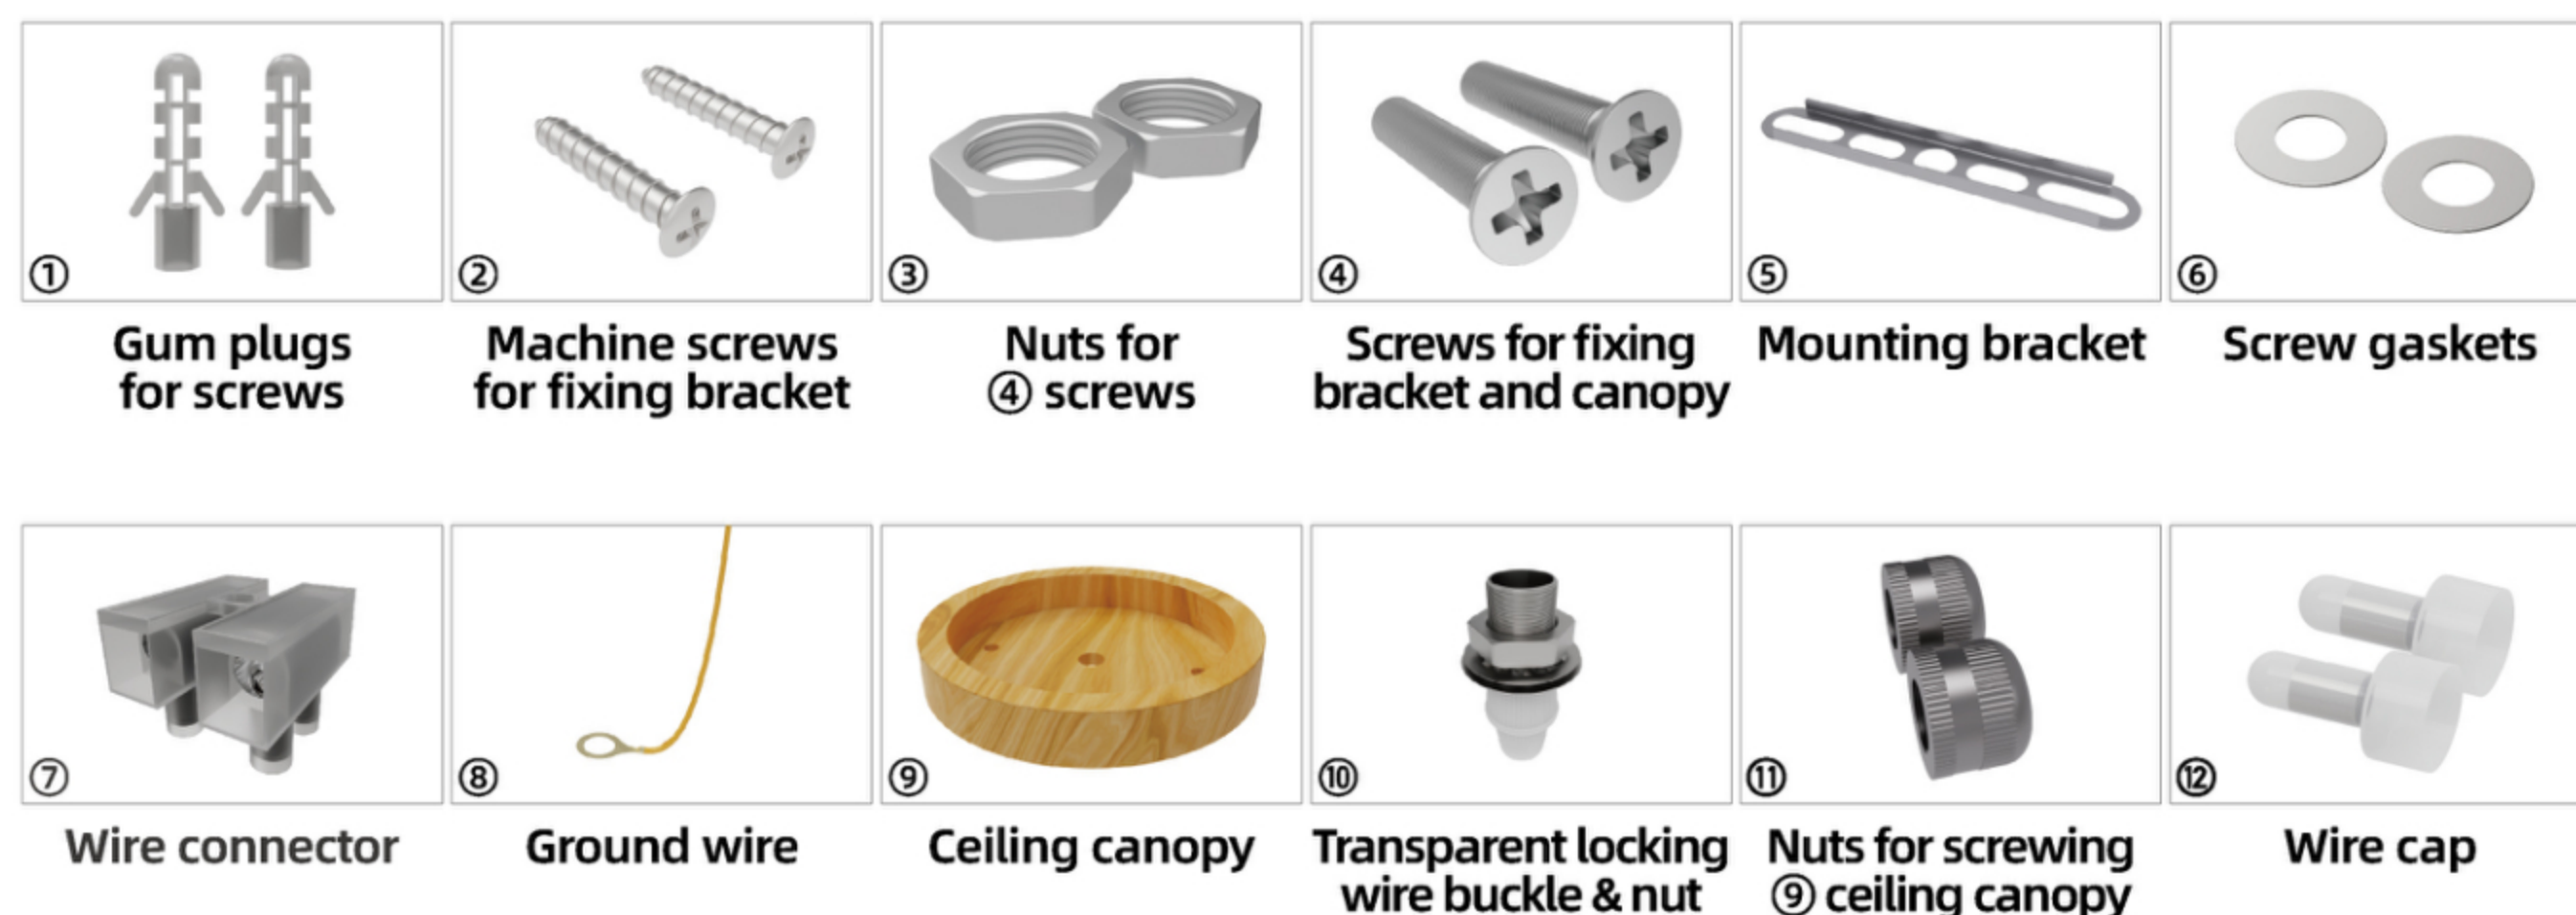

INSTALLATION DIAGRAM

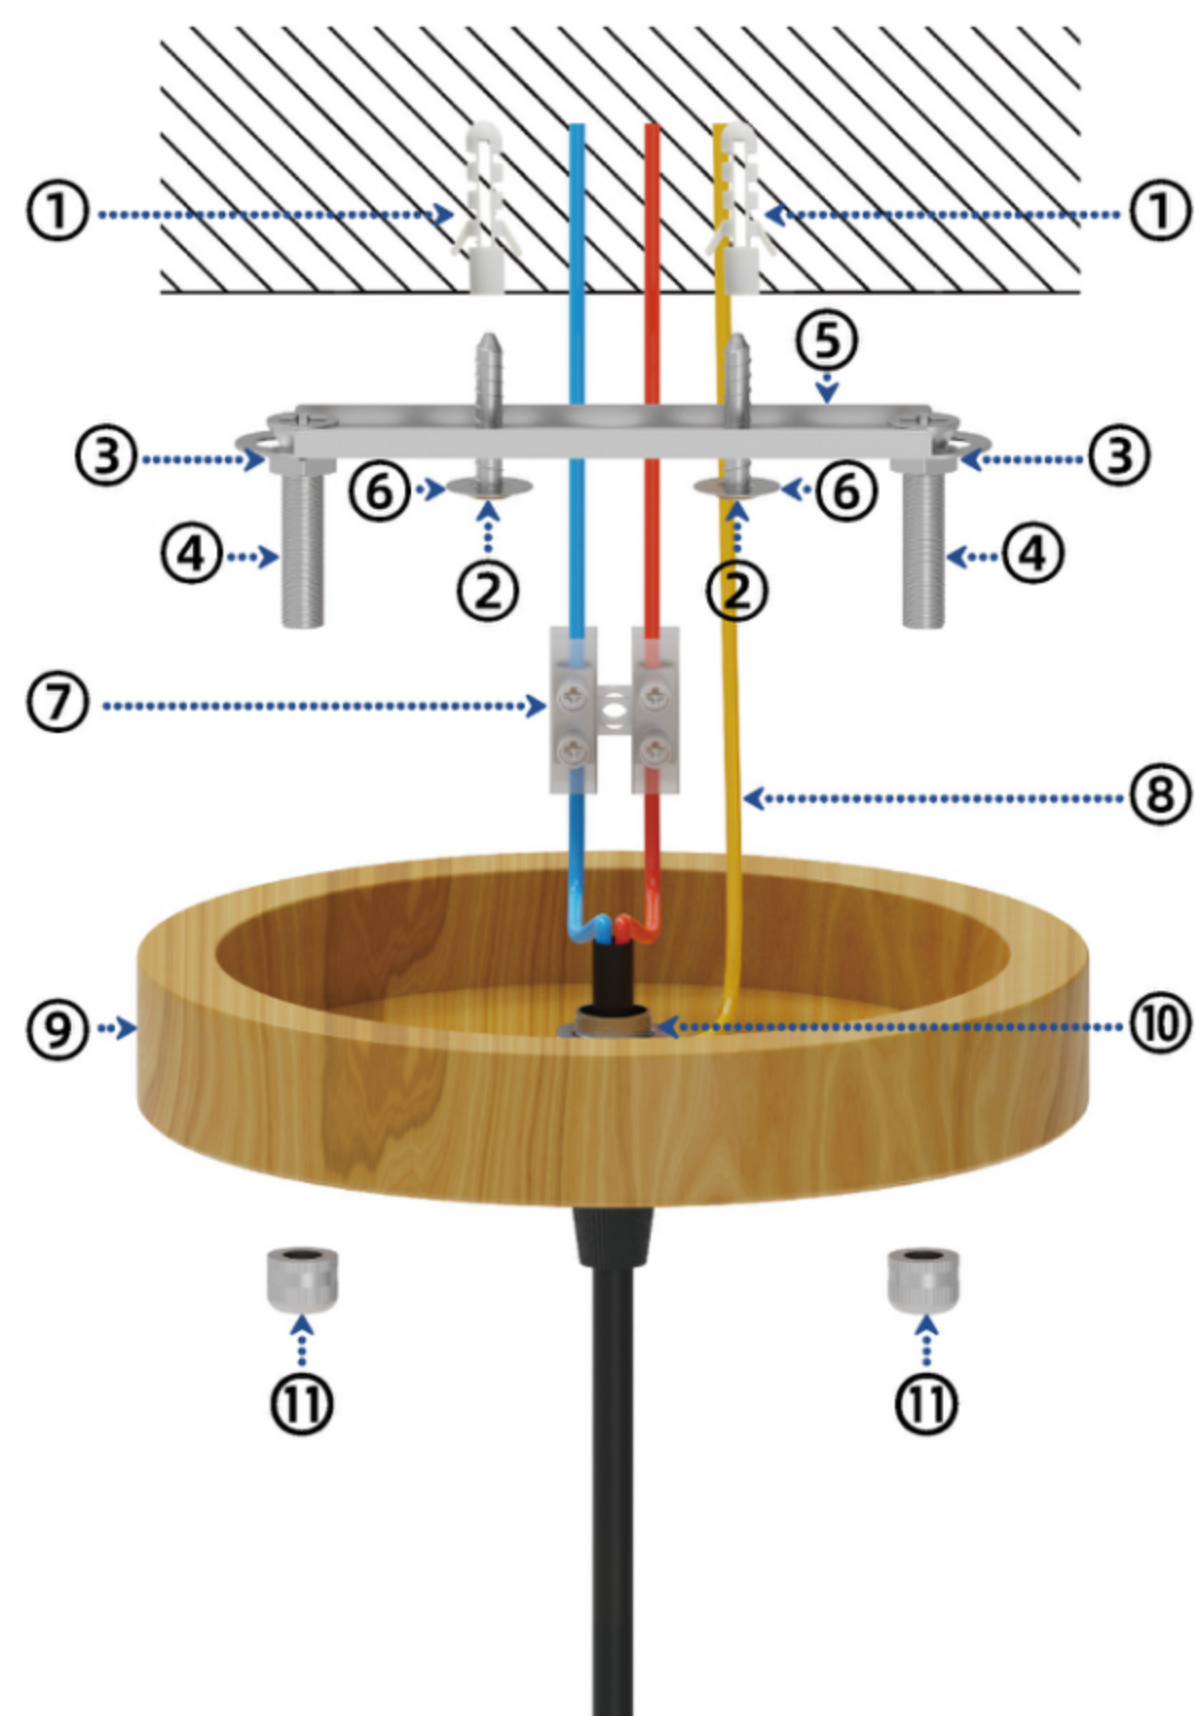

⚠ Note:


- Please make sure that you have all parts indicated before you begin assembly of this item.

- Please check the strength of the ceiling before installation and install it in a place where it can bear the weight.

(if the strength is insufficient, please make sure to reinforce it before installation.)


- Do not install in a dangerous and unstable place.

THE INSTALLATION STEPS

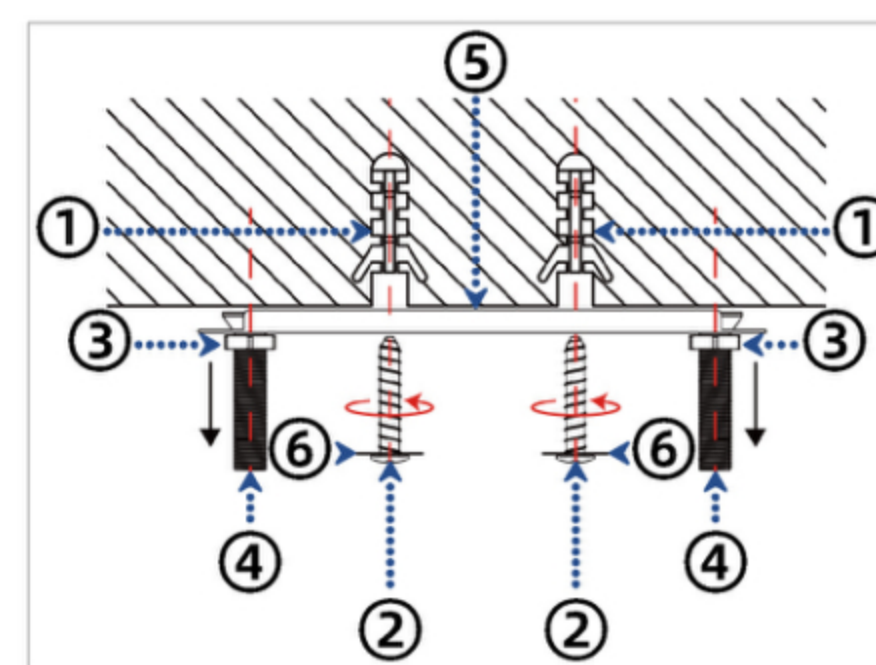


01 Mounting the bracket to the ceiling

- Put ④ screws across the end holes of ⑤ the bracket, and then use ③ nuts to tighten;
- Punch holes in your ceiling according to the second holes of ⑤ the bracket and then put ① gum plugs into the holes.
- Put ⑥ screw gasket into ② machine screw and then fix ⑤ the bracket to the ceiling.

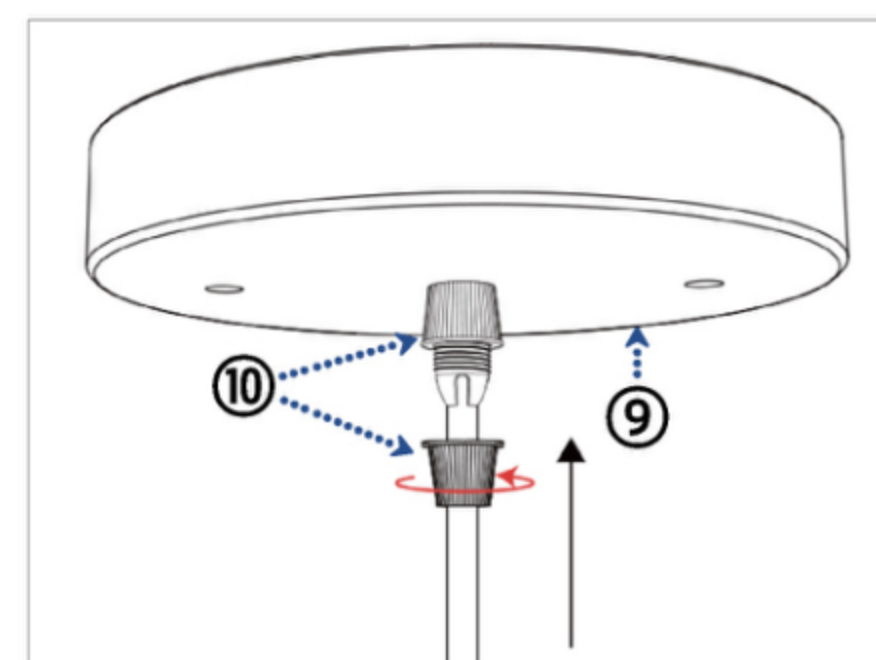


02 Secure the cord

- Unscrew ⑩ the transparent wire buckle, pass and pull the cord through ⑨ ceiling canopy to adjust the length of the cord, and then tighten the transparent wire buckle.

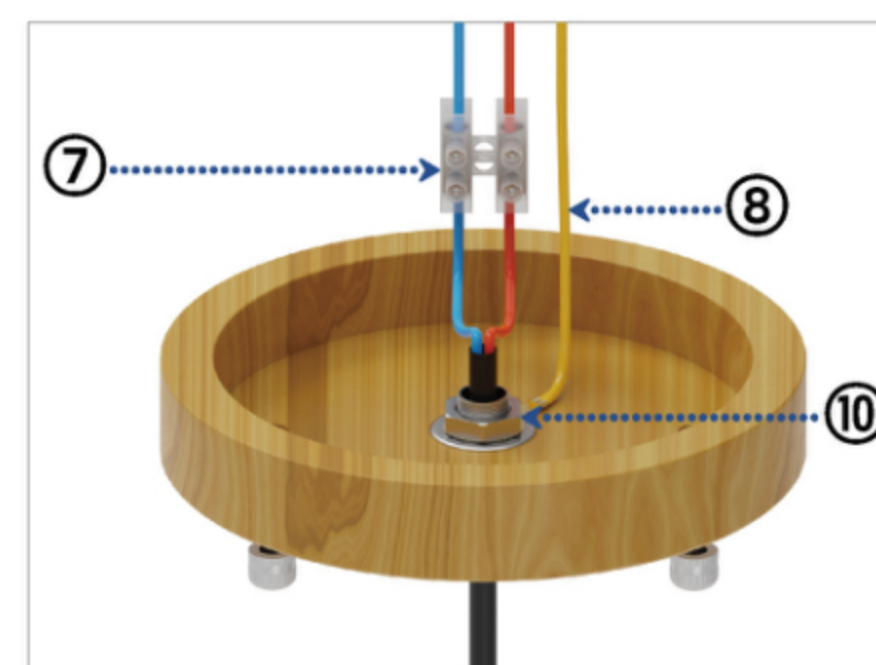

03 Connect the power cord

- Positive and negative of your home connect the cord through ⑦ wire connector in order. (if you need to connect a ground wire, please use ⑧ ground wire to connect the ground wire reserved in your home with ⑩ transparent locking wire buckle & nut.)

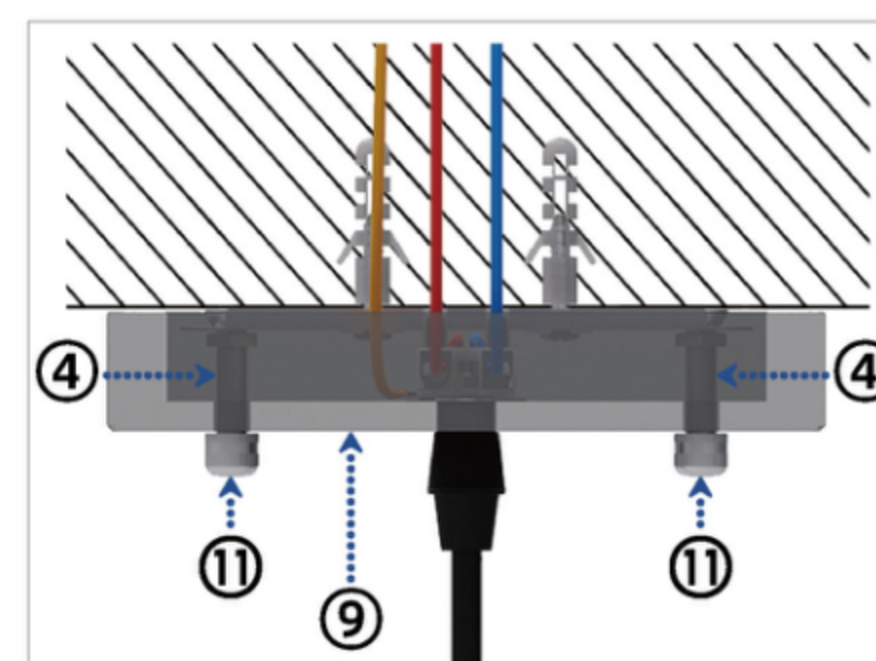

04 Fix the ceiling canopy

- Cover ⑨ ceiling canopy across ④ screws of the fixed bracket, and then use ⑪ nuts to tighten the ceiling canopy.