







Installation & Assembly

①	 light arm 5pcs	③ ④ ⑤	 ③threaded nut 1pcs ④ metal cover 1pcs ⑤metal cylinder tube 1pcs	⑧	 short hanging tube 1pcs	⑪	 long hanging tube 3pcs	⑮	 glass lampshade 5pcs		X 1PCS
											X 1PCS
											X 3PCS
②	 wrench 1pcs	⑥ ⑦	⑥ lock nut & teeth lock washer 5pcs ⑦ metal tube 5pcs	⑨ ⑩	 ⑨ canopy 1pcs ⑩ cap nut 2pcs			⑯	 cap connector 6pcs		X 3PCS
											X 3PCS




1. Remove out the threaded nut ③ and metal cover ④ from cylinder tube ⑤.




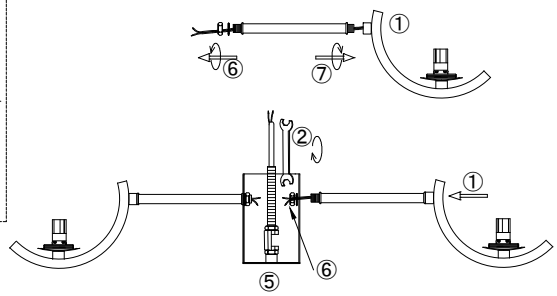


2. Rotate to install the tube ⑦ to the light arm and remove out the lock nut & teeth lock washer ⑥ from the tube ⑦.
3.Use wrench ② to install the light arm ① to the cylinder tube ⑤ with lock nut & teeth lock washer ⑥, and adjust the position of the light arm ① like picture shown.

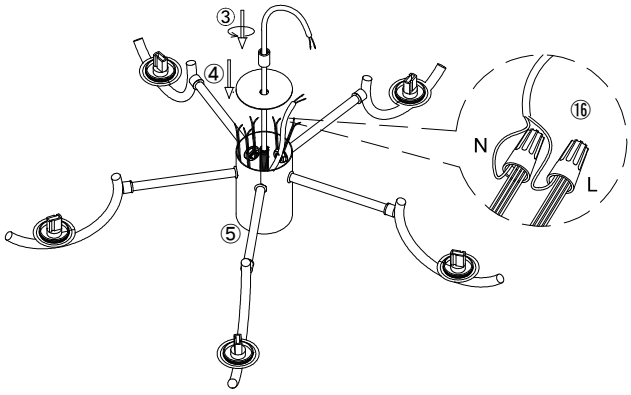


4.Connect all the wires by parallel with connectors ⑯(all live line-L use one connector, and neutral Line-N use another connector).
5.Close the cover ④ to the tube ⑤ with threaded nut ③.

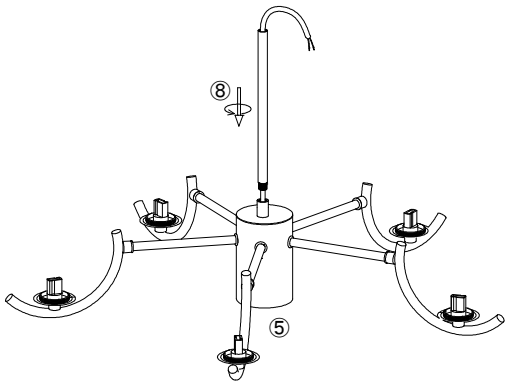


6.Let the wire of the fixture go through the tube ⑧, rotate to install the tube ⑧ to the fixture.(can connect more tube to get the height you need)



(can connect more tube to get the height you need)

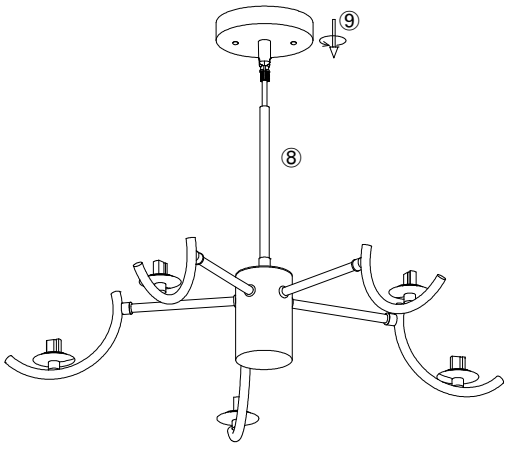

7. Rotate to install the canopy ⑨ to the fixture.

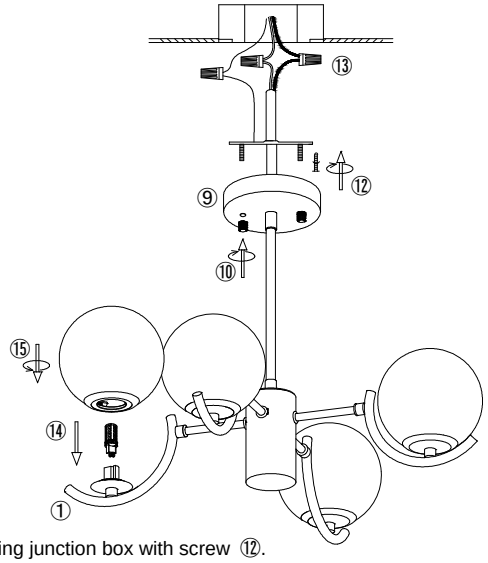

8. Install the bracket to the ceiling junction box with screw ⑫.
9. Connect the wire to your home line with cap connector ⑬.
10.Install the fixture to the bracket with cap nut ⑩.
11.Insert the G9 bulbs and rotate to install the lampshade ⑮ to the bulb holder. (bulbs are not included in the package)

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !