ASSEMBLY INSTRUCTIONS






Figure 1 Assembly for Bench E D B Figure 2

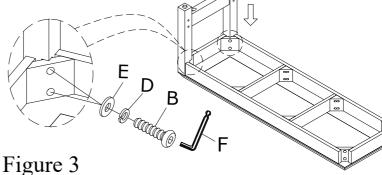

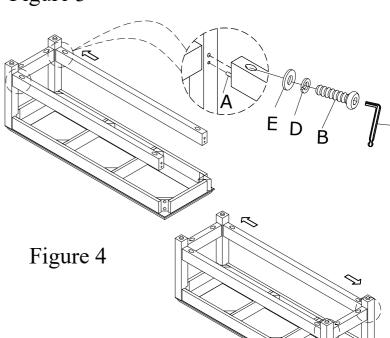

TOOLS REQUIRED:

Allen Wrench (Provided, Part F)

BEFORE YOU START:


- 1. Check the parts against the parts list to make sure all items are present.
- 2. Assemble your furniture on a soft, flat surface to avoid scratching the finish.
- CAUTION: Do not over tighten screws, nuts or bolts during assembly.
- 4. Your furniture may require occasional tightening.

INSTRUCTIONS:

- 1. Turn the seat frame upside down on to a clean soft surface.
- 2. Attach short stretcher to the legs using Dowel (A), Allen Bolt (B)lock washer (D),flat washer (E) and the Allen Wrench(F).As Shown in Figure 1.
- 3.Attach leg frame to the seat frame using Allen Bolt (B)lock washer (D),flat washer (E) and the Allen Wrench(F).As Shown in Figure 2. (Do not over tighten bolts during assembly)
- 4. Attach two long stretchers to the legs using Dowel (A),Allen Bolt (B) lock washer (D),flat washer (E) and the Allen Wrench (F).As Shown in Figure 3. (Do not over tighten bolts during assembly)
- 5.Repeat step 2,3 for the last leg frame.
- 6. Tighten all bolts before setting table back upright.

	HARDWARE LIST	
Drawing	Description	Q'TY
	Dowel Ø12*40mmL	14pcs
9)mm	Allen Bolt (\$\phi 5/16 \times 1-3/4")	22pcs
1 mm	Allen Bolt (\$\phi 5/16 x 1-1/2")	4pcs
P	Lock Washer Ø5/16"	26pcs
0	Flat Washer Ø5/16"*19mm	26pcs
	Allen Wrench	1 pc
	9mm 9mm	Drawing Description Dowel Ø12*40mmL Allen Bolt (Ø5/16 × 1-3/4") Allen Bolt (Ø5/16 × 1-1/2") Lock Washer Ø5/16" Flat Washer Ø5/16"*19mm

ASSEMBLY INSTRUCTIONS



TOOLS REQUIRED:

Allen Wrench (Provided, Part F) ScrewDriver (Not Provided)

BEFORE YOU START:

- 1. Check the parts against the parts list to make sure all items are present.
- 2. Assemble your furniture on a soft, flat surface to avoid scratching the finish.
- 3. **CAUTION:** Do not over tighten screws, nuts or bolts during assembly.
- 4. Your furniture may require occasional tightening.

INSTRUCTIONS:

- 1. Turn the table upside down on to a clean soft surface.
- 2. Attach stretcher to the legs using Dowel (A),Allen Bolt (B)lock washer (D),flat washer (E) and the Allen Wrench(F).As Shown in Figure 1.(Do not over tighten bolts during assembly)
- 3. Attach two legs to the top using Allen Bolt (C) lock washer (D),flat washer (E) and the Allen Wrench (F).As Shown in Figure 2.(Do not over tighten bolts during assembly)
- 4. Tighten all bolts before setting table back upright.

