



1. Let the main wire of the light fixture go through the threaded rod ②, rotate to fix threaded rod ② on the connected piece ⑥, lock it with grub screw ④ by hex key ⑤.
2. Let the hanging vase ③ go through the threaded rod ②, lock it with hanging ring ①.

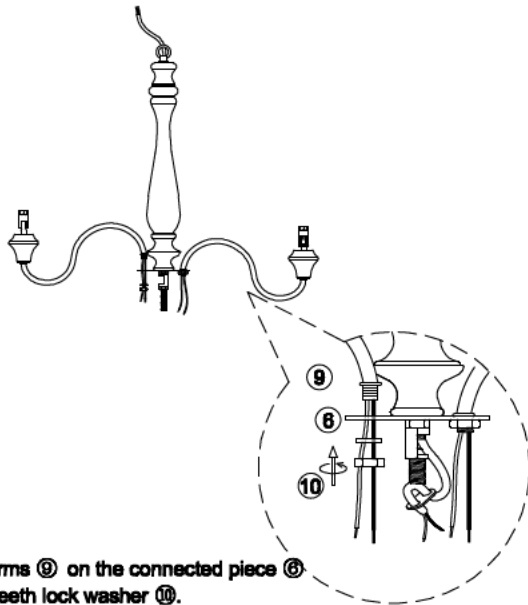


3. Install the light arms ⑨ on the connected piece ⑥ with lock nut & teeth lock washer ⑩.

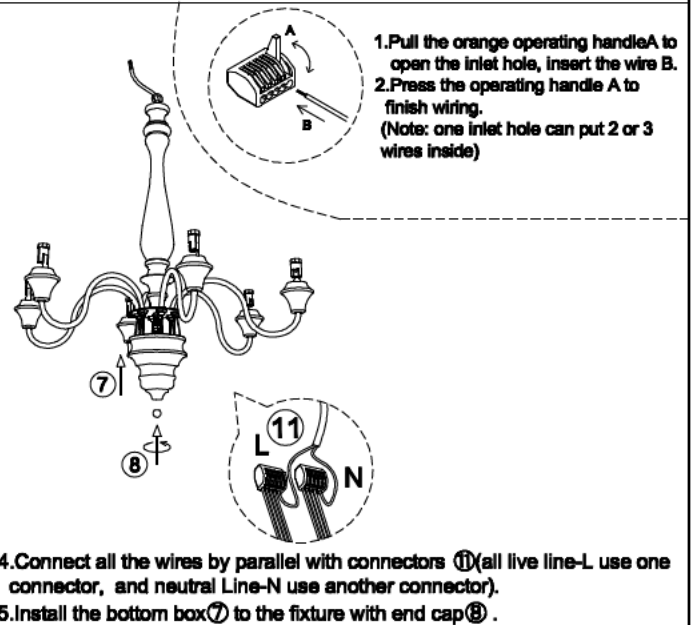


1. Pull the orange operating handle A to open the inlet hole, insert the wire B.
2. Press the operating handle A to finish wiring. (Note: one inlet hole can put 2 or 3 wires inside)

4. Connect all the wires by parallel with connectors ⑪ (all live line-L use one connector, and neutral Line-N use another connector).
5. Install the bottom box ⑦ to the fixture with end cap ⑧.

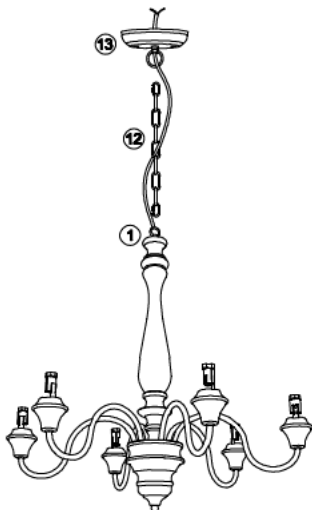

6. Connect the light fixture with canopy ⑬ with chain ⑫, let the wire go through the chain ⑫ and canopy ⑬.

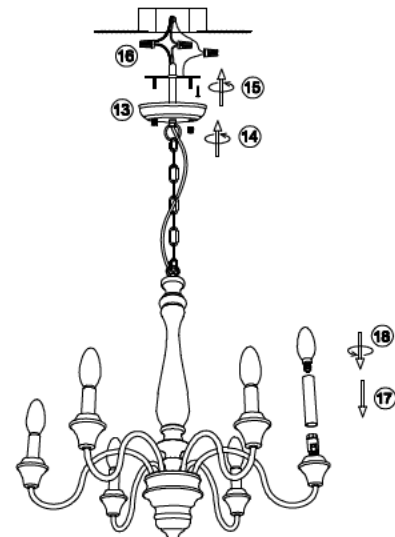

7. Install the bracket to the ceiling junction box with screw ⑮.
8. Connect the wire to your home line.
9. Install the fixture to the bracket with cap nut ⑭.
10. Put the cylinder tube ⑰ on the bulbholder and install the bulbs ⑱.

**Please read carefully before installation!!!**

**Note : Please make sure that the electricity is powered off during installation !  
Only a professional electrician should install this kind of product !**