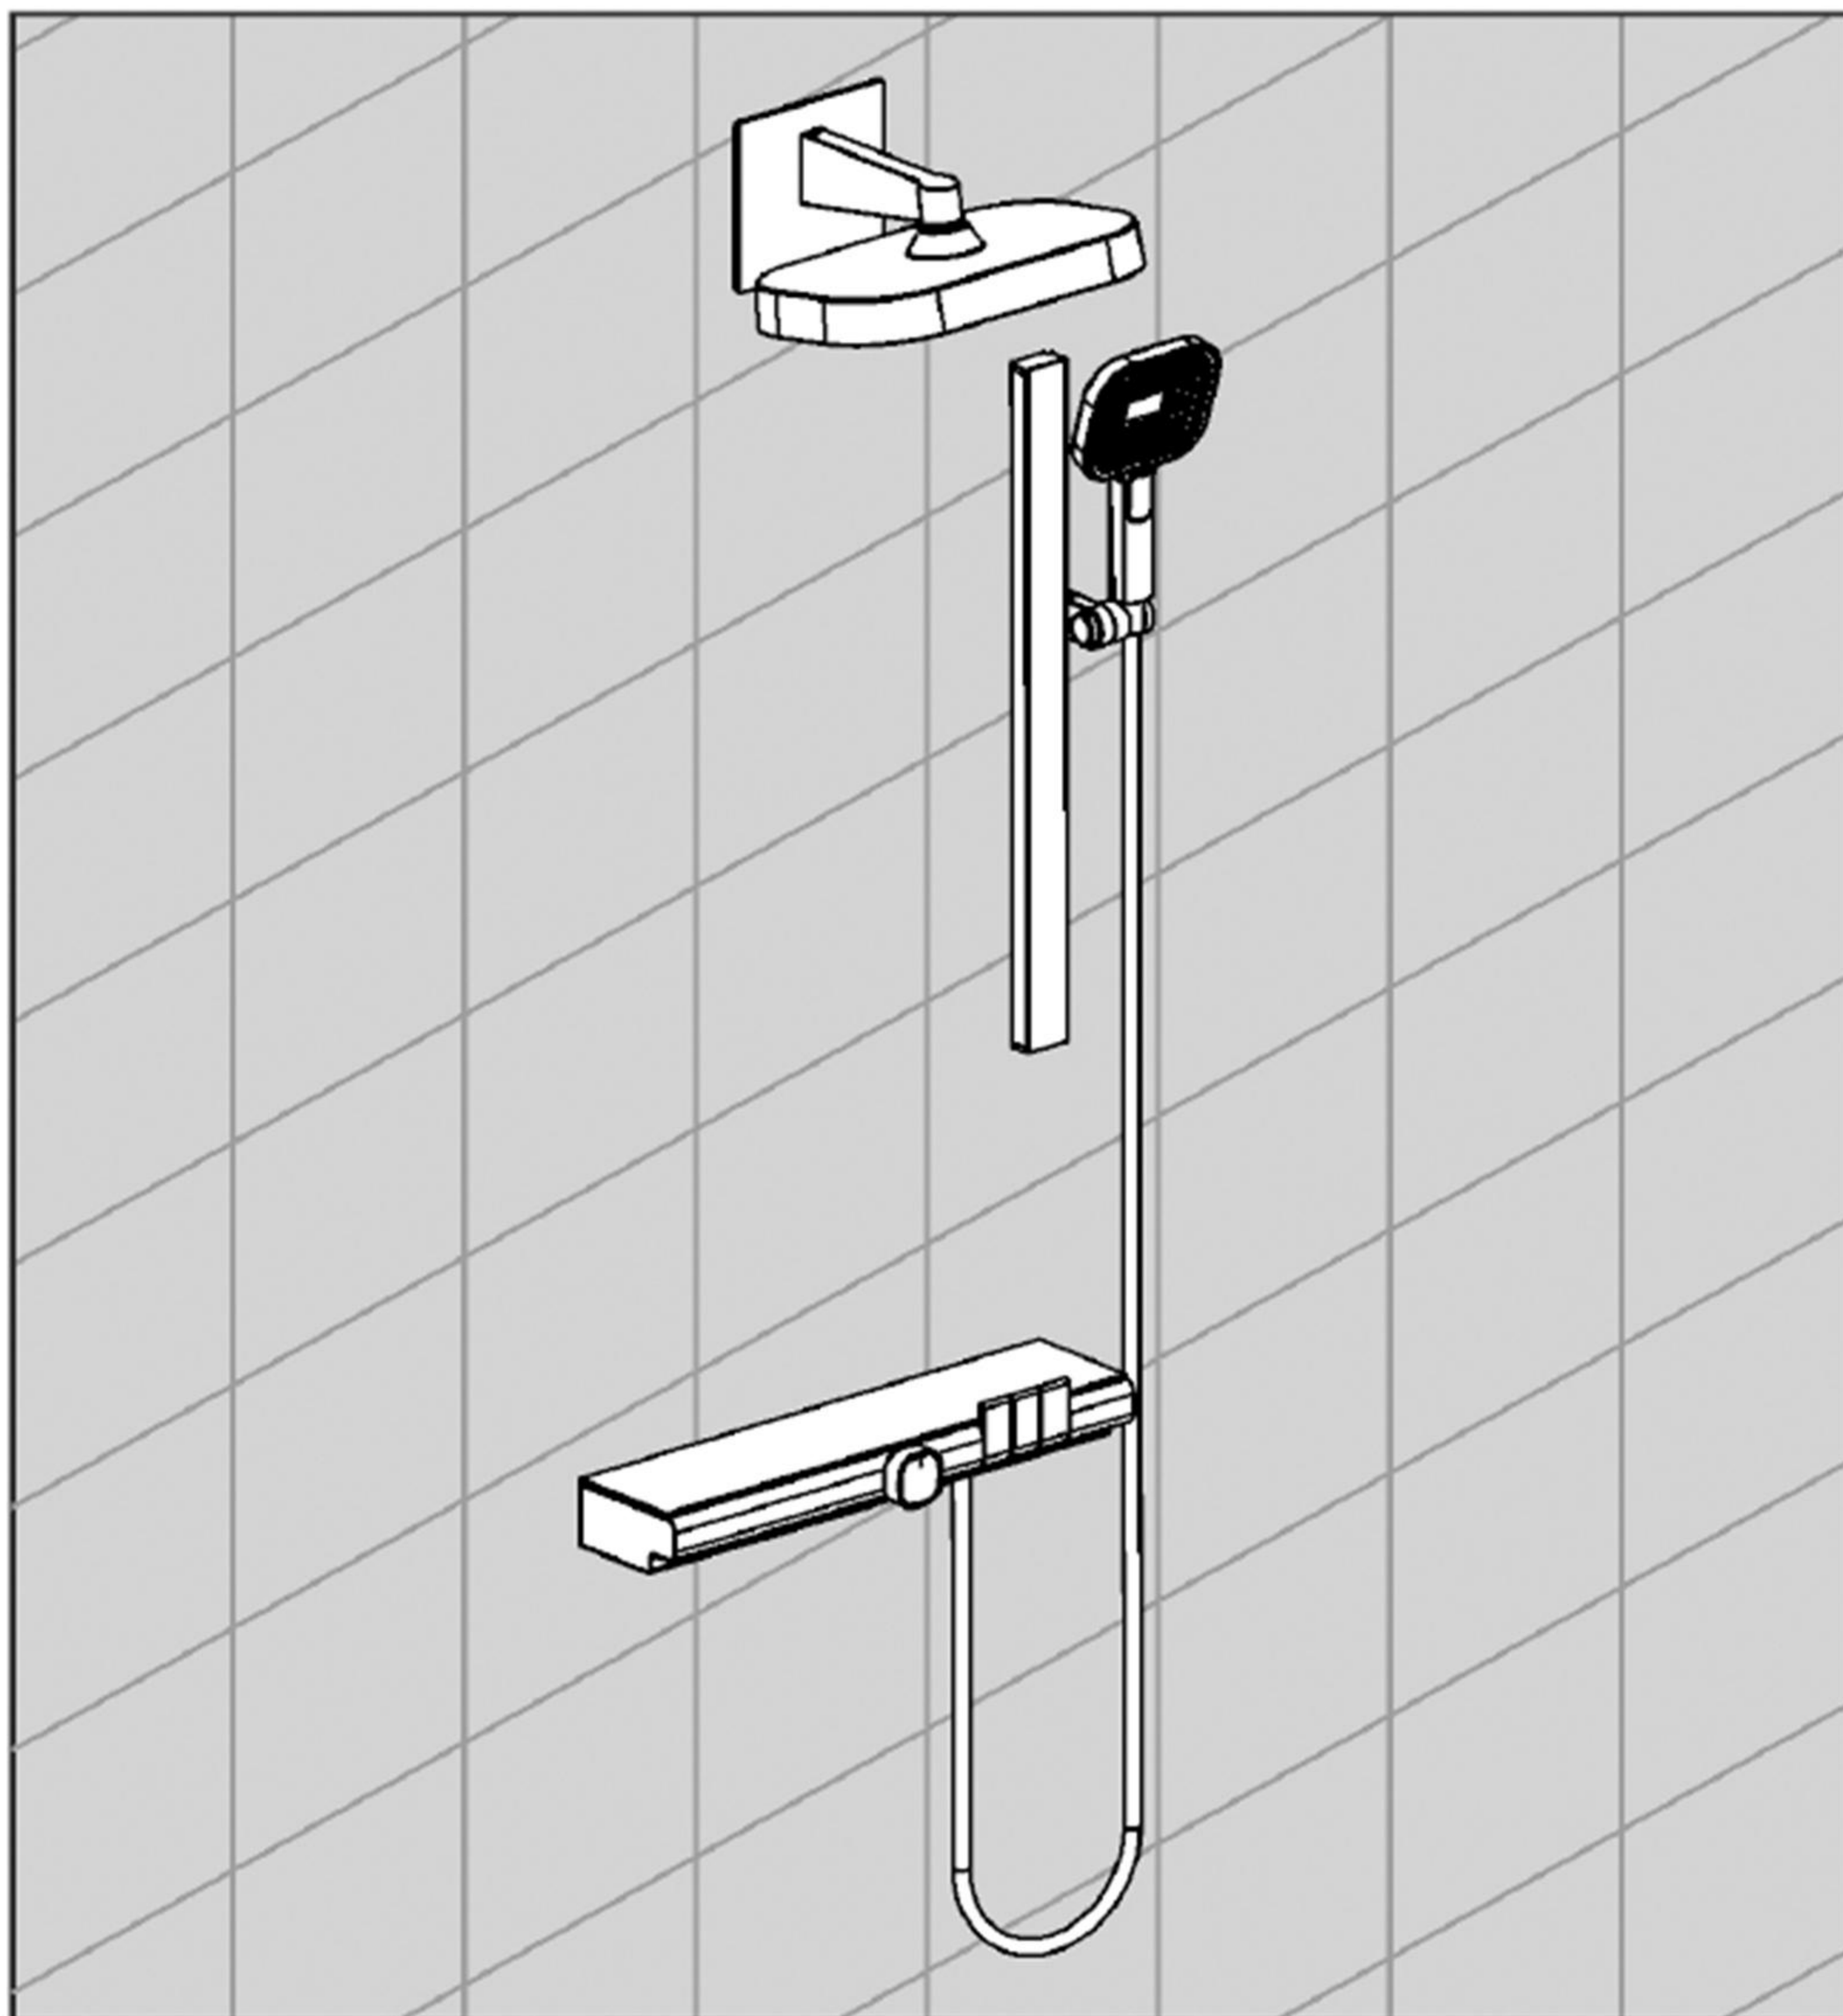


Shower System User Manual



Installation Manual



IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 - USA - 909-472-4100 - 909-472-4244 - www.iapmoirt.org



ISO/IEC 15005
Product Certification Body
#0102





ISO 9001
ACCREDITED
#0095



UPC

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's facility and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authority Having Jurisdiction.

This certificate is evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pid.iapmo.org

Effective Date:	December 2019	-Rev. 2/24/2020-	Valid After: December 2024
Product:	Flexible Water Connectors		File No. 5311
Issued To:	Panaski Group Inc. Mechanical & Electrical Industrial Zone, Yuhuan County, Yuhuan 317600, ZHEJIANG China		

Identification: Products shall be marked with manufacturer's name or trademark, a statement "Pcse with water in accessible locations only." The products shall also bear the "UPC" certification mark. Markings shall be means of either a permanent mark on the product, a label on the product or a tag attached to the product.

Characteristics: Flexible water connectors manufactured in various sizes, lengths and metal end fittings for hot or cold water applications that consist of an inner tube, which may or may not have an outer braided cover. Connectors are to be installed for use in accessible locations only. To be installed in accordance with the manufacturer's instruction, and the latest edition of the Uniform Plumbing Code and National Plumbing Code of Canada.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the



Chairman, Product Certification Committee



CEO, The IAPMO Group



This listing period is based upon the last date of the month indicated on the Effective Date and Valid After Date shown above. Any change in material, manufacturing process, marking or drawing having not obtained the approval of the Product Certification Committee or any evidence non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of an reference to this listing for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 • USA • 909-472-4100 • 909-472-4244 • www.iapmort.org



ISO/IEC 17065
Product Certification Body
#0032







C

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's facility and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

Effective Date:	November 2019	Void After:	November 2024
Product:	Plumbing Fixture Fittings	File No.	10633
Issued To:	Aqua Gallery Co., Ltd 13th-15th Aio Block International Ceramics Sanitary City, 528000 Foshan, China		

Identification: Plumbing supply fittings complying with this Standard shall be marked with the manufacturer's recognized name, trademark, or other mark or, in the case of private labeling, the name, trademark or other mark of the customer for whom the fitting was manufactured. The marking shall be accomplished by use of a permanent mark or by placing a permanent label on the product. Markings on plumbing supply fittings shall be visible after installation.

Single-handle, single-control, and automatic compensating mixing bath and shower valves shall have identifiable temperature control settings in which the settings are indicated by words ("cold", "warm", "hot", etc.), by numbers, or graphically.

Packages shall be marked with the manufacturer's name, trademark, or other mark as well as the model number or, in the case of private



Chairman, Product Certification Committee



CEO, The IAPMO Group

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or labeling without having first obtained the approval of the Product Certification Committee may be cause for revocation of this listing, non-compliance with applicable codes and standards or of interior surveillance, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by the written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.



IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 - USA • 909-472-4100 • 909-472-4244 • www.iapmort.org





CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by authorities having jurisdiction.

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pid.iapmo.org

Effective Date:	March 2019	Void After:	March 2024
Product:	Plumbing Fixture Fittings - Components	File No.	MC-9703
Issued To:	Ningbo Wanhai Cartridge Technology Co., Ltd. Xiaochen Zone, Chunhui Fenghuang, NINGBO 315538 China		

Identification: Each fitting component shall bear permanent legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark known to identify the manufacturer. The product shall also bear all other markings required by the standard. The marking shall be applied so as to be visible after installation. The product or packaging shall also bear the cUPC® certification mark along with the term "COMPONENT" above.

Characteristics: Plumbing fixture fitting components to be installed in accordance with the manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.

Products are in compliance with the following code(s):
Uniform Plumbing Code (UPC®)


Chairman, Product Certification Committee

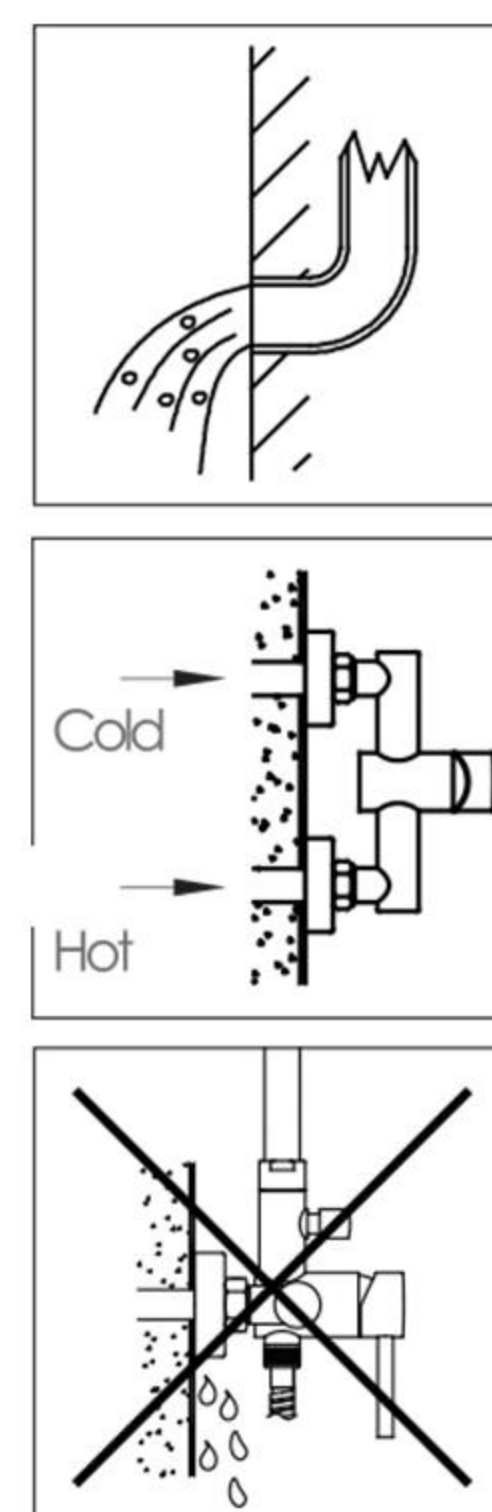

CEO, The IAPMO Group

This listing period is based upon the last date of an indicator on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design requiring having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.



1 Installation Guidelines

1. When opening the package, refer to the "Package Contents" and ensure all parts are present.
2. Make sure the basin you purchase matches the size of the mixer (faucet).
3. Do not disassemble the mixer body yourself.
4. Connect the inlet hoses to the supply stopper: the left hose to the hot water supply, and the right hose to the cold water supply.
5. Before installation, ensure:
The inlet pipes and supply stopper are installed and clean.
There are no impurities in the pipeline.
6. After finishing the installation, check all joints and connections for leaks.
7. The water pressure should be between 0.05 MPa and 0.75 MPa, including cold water pressure.



Kind Tips:

It is recommended to install the faucet after the house has been properly cleaned.
Suggestion: If the faucet is located in a highly corrosive environment, clean the faucet surface frequently to maintain its lifespan.

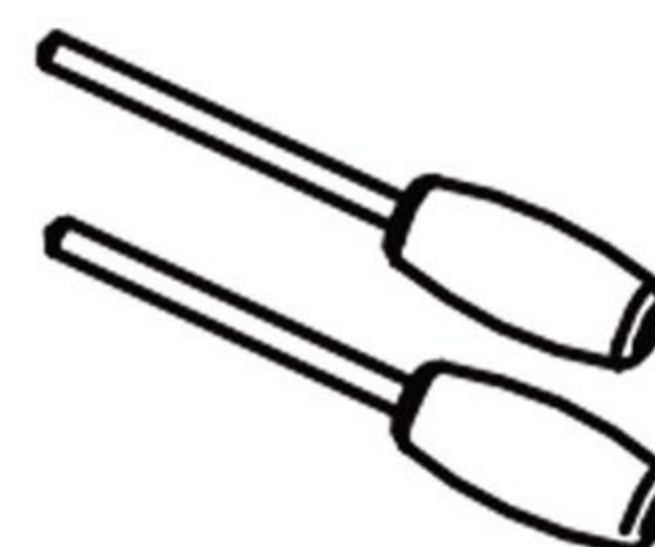
Recommended tools:



•Water sealant




•Allen key




•Flat screwdriver
•Cross screwdriver

2 Included Items


NO.	Part name	Quantity
1	outlet joint	1
2	Decorative cover plate	1
3	Top Shower arm	1
4	Top Shower	1
5	Hand Shower	1
6	Inwall body	1
7	inlet joint	1
8	Hexagonal spoon tool	1
9	Eccentric Nipple	2
10	Body	1
11	Hose	1
12	adjustable shower holder	1
13	Slide Bar	1
14	Screw accessory kit	1

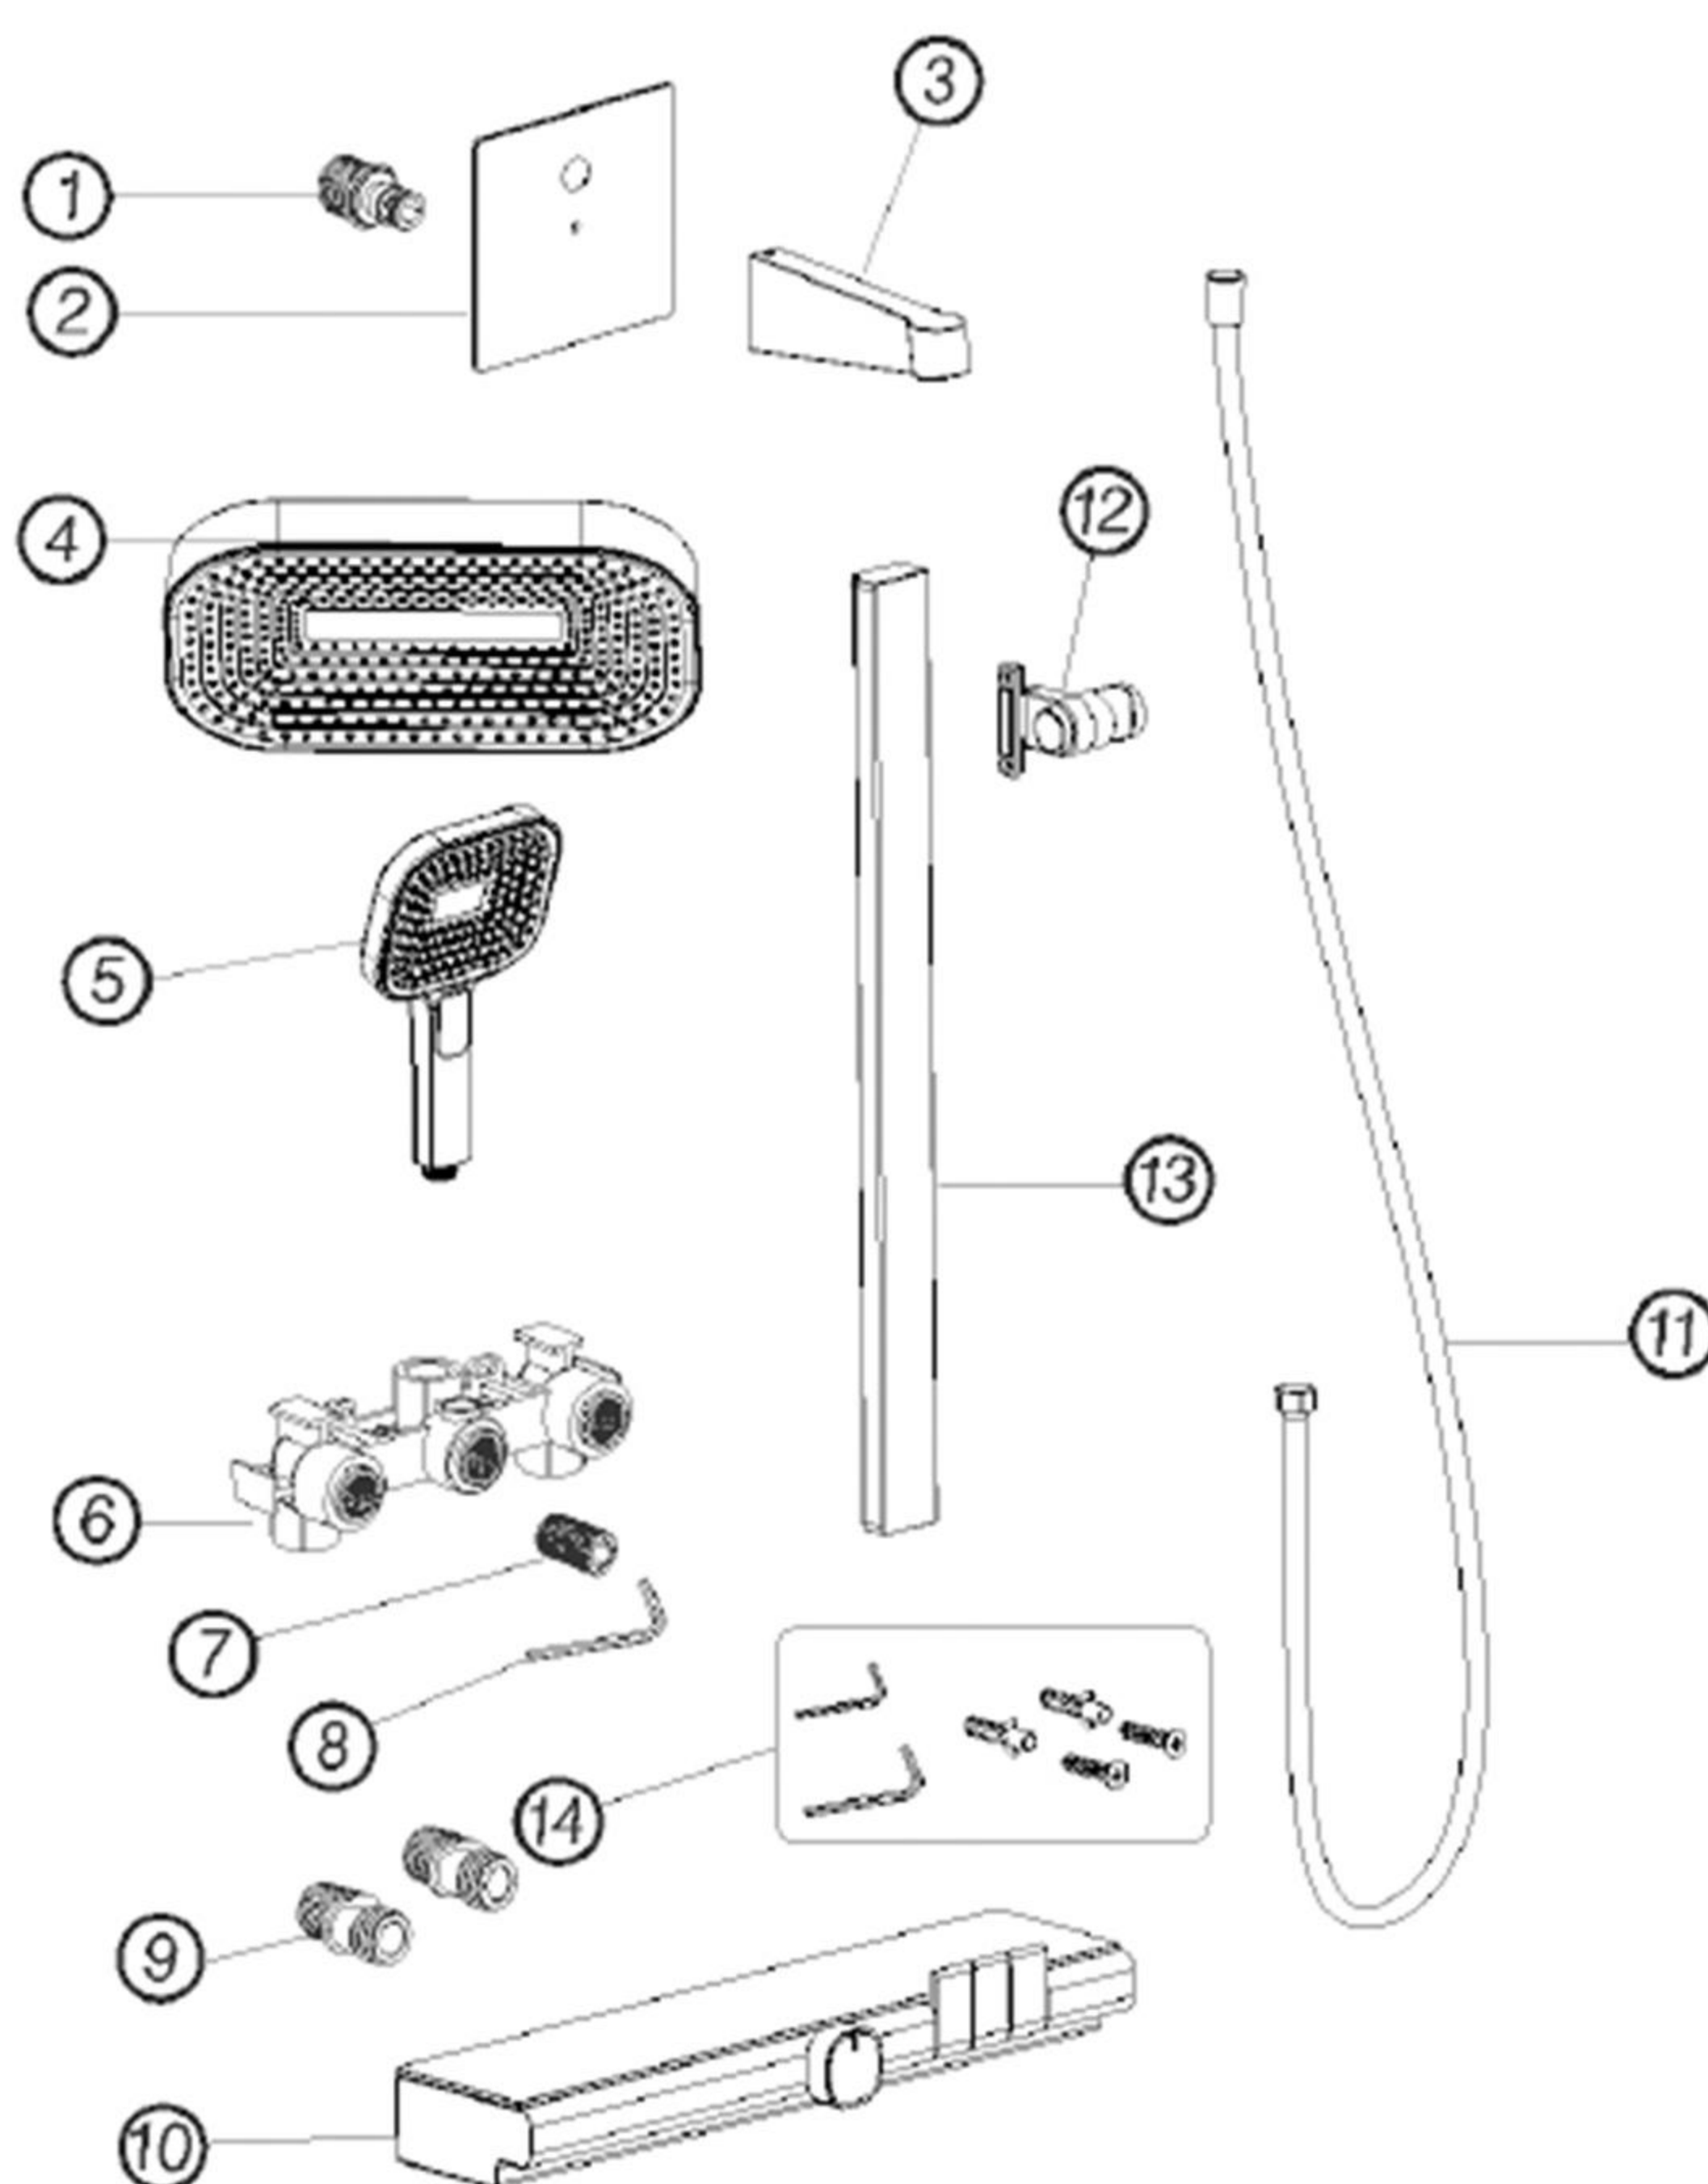

3 Dimension Diagram

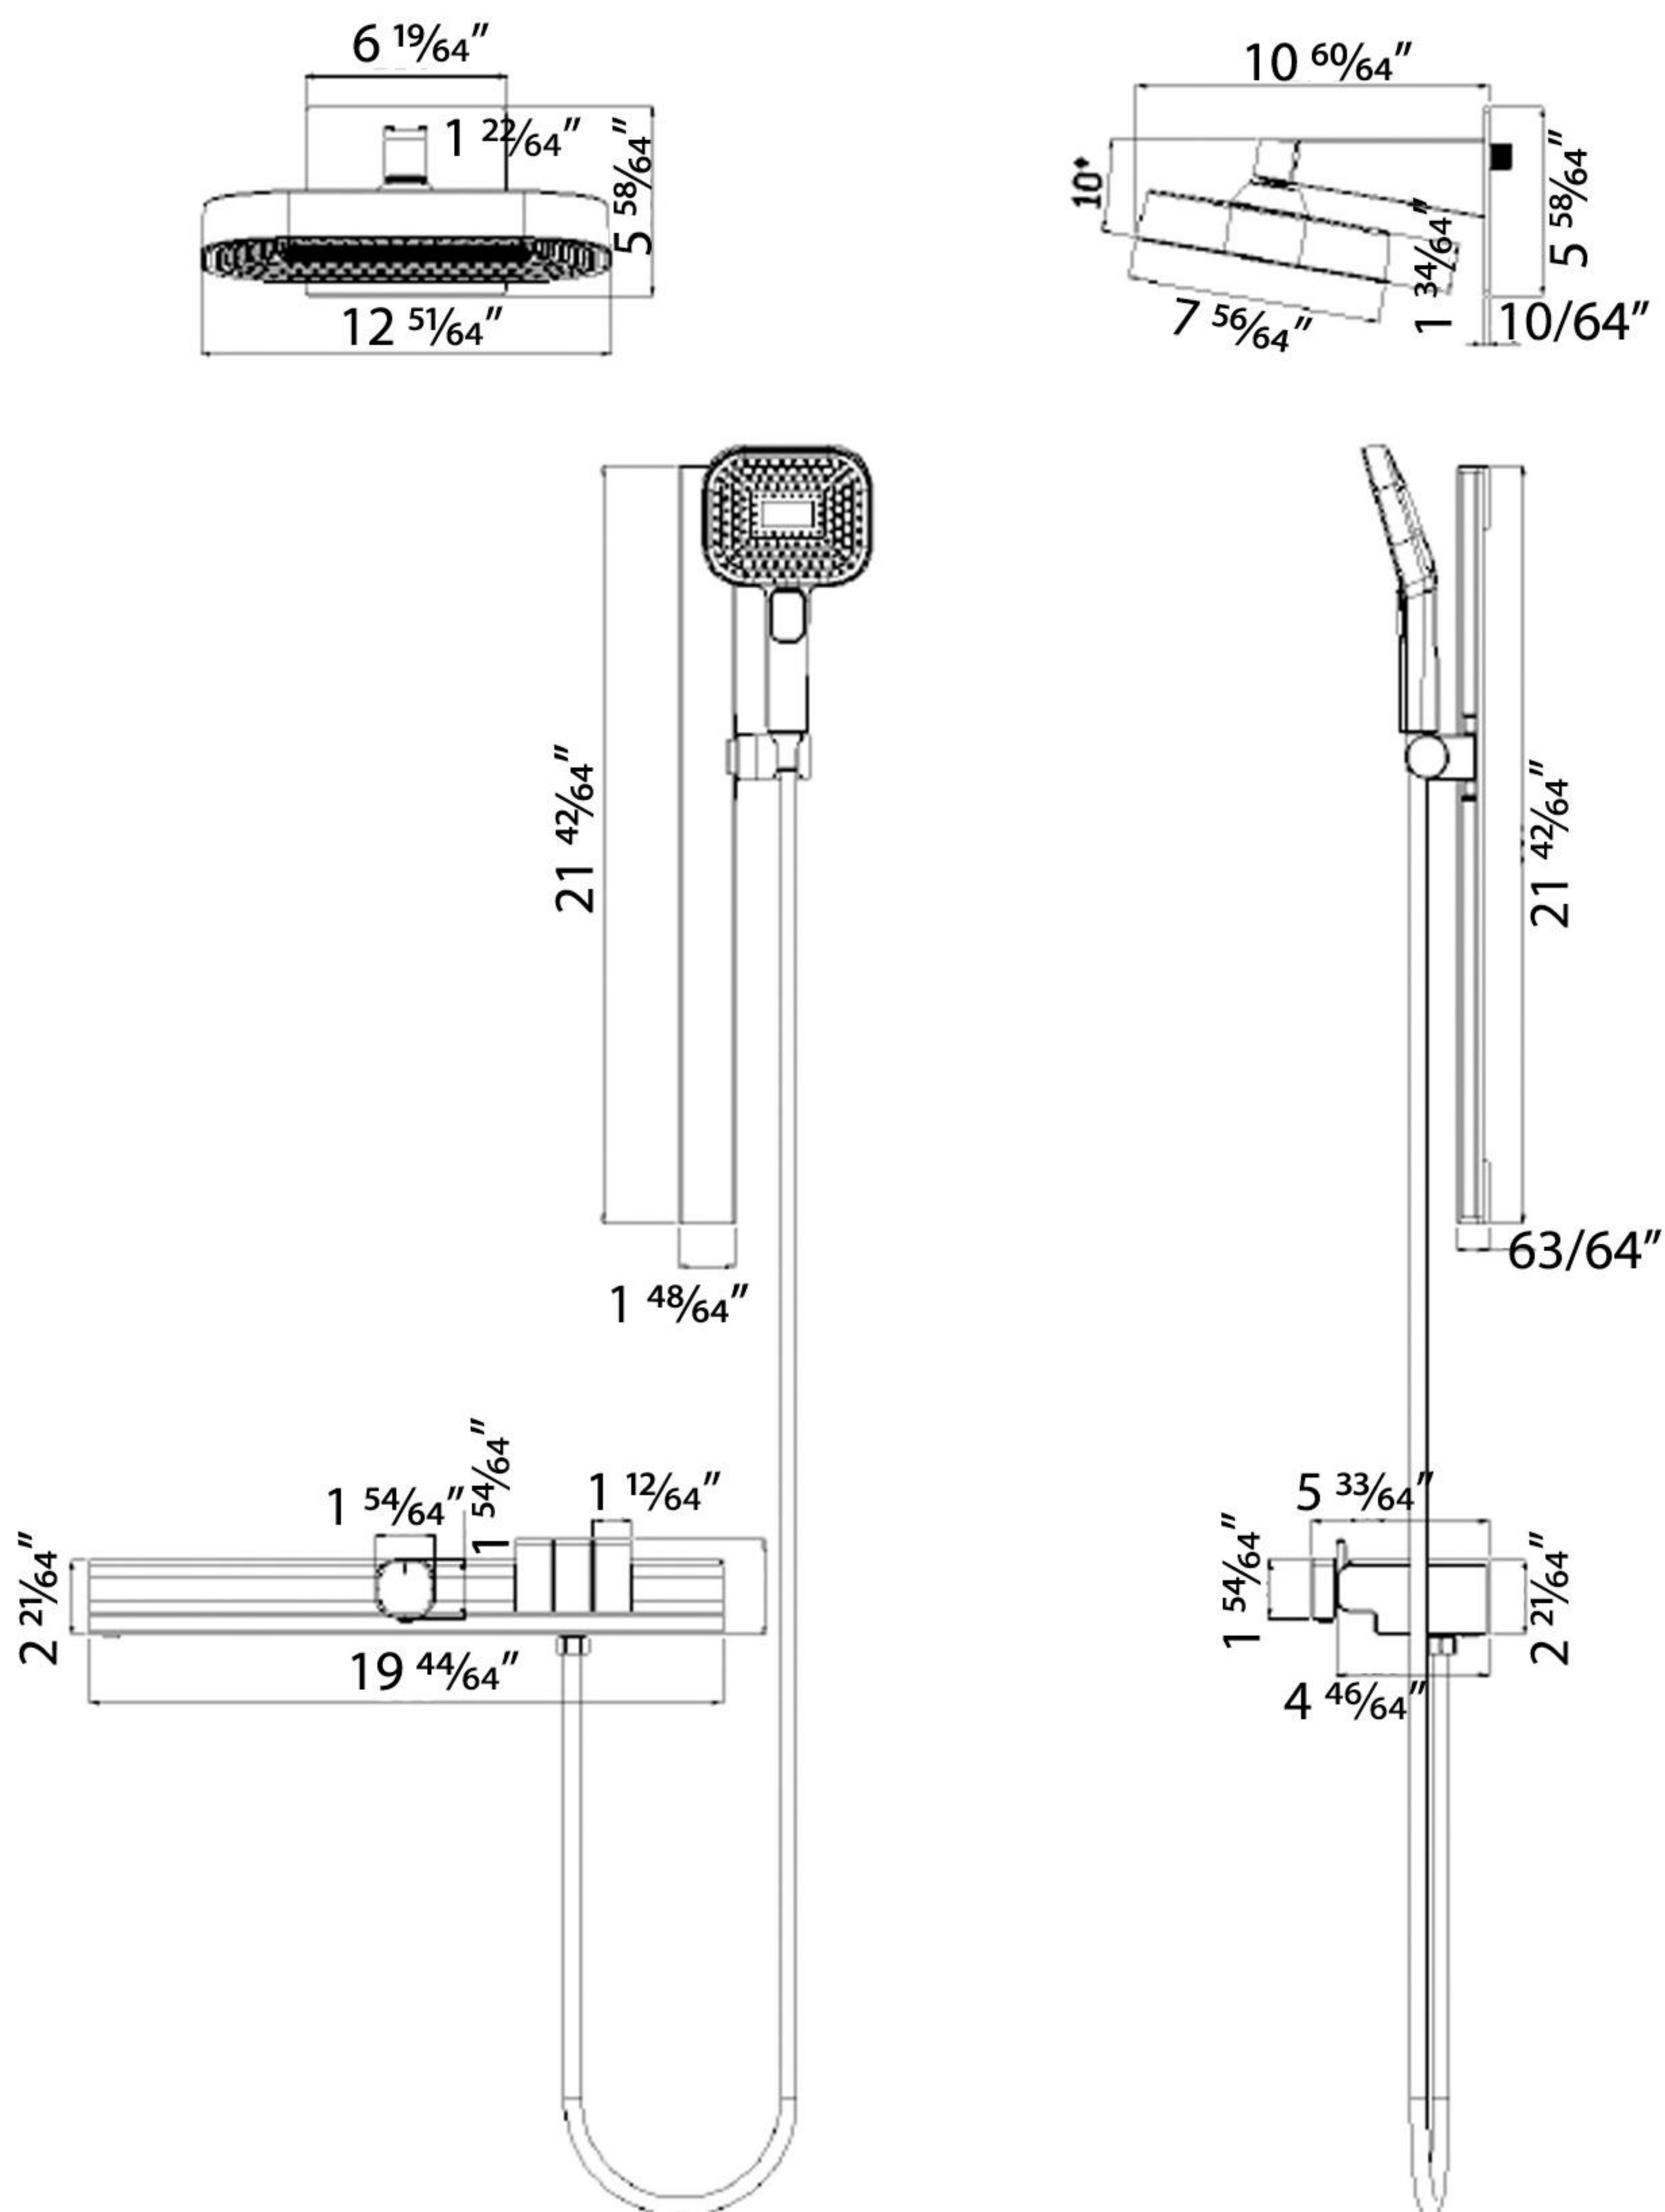

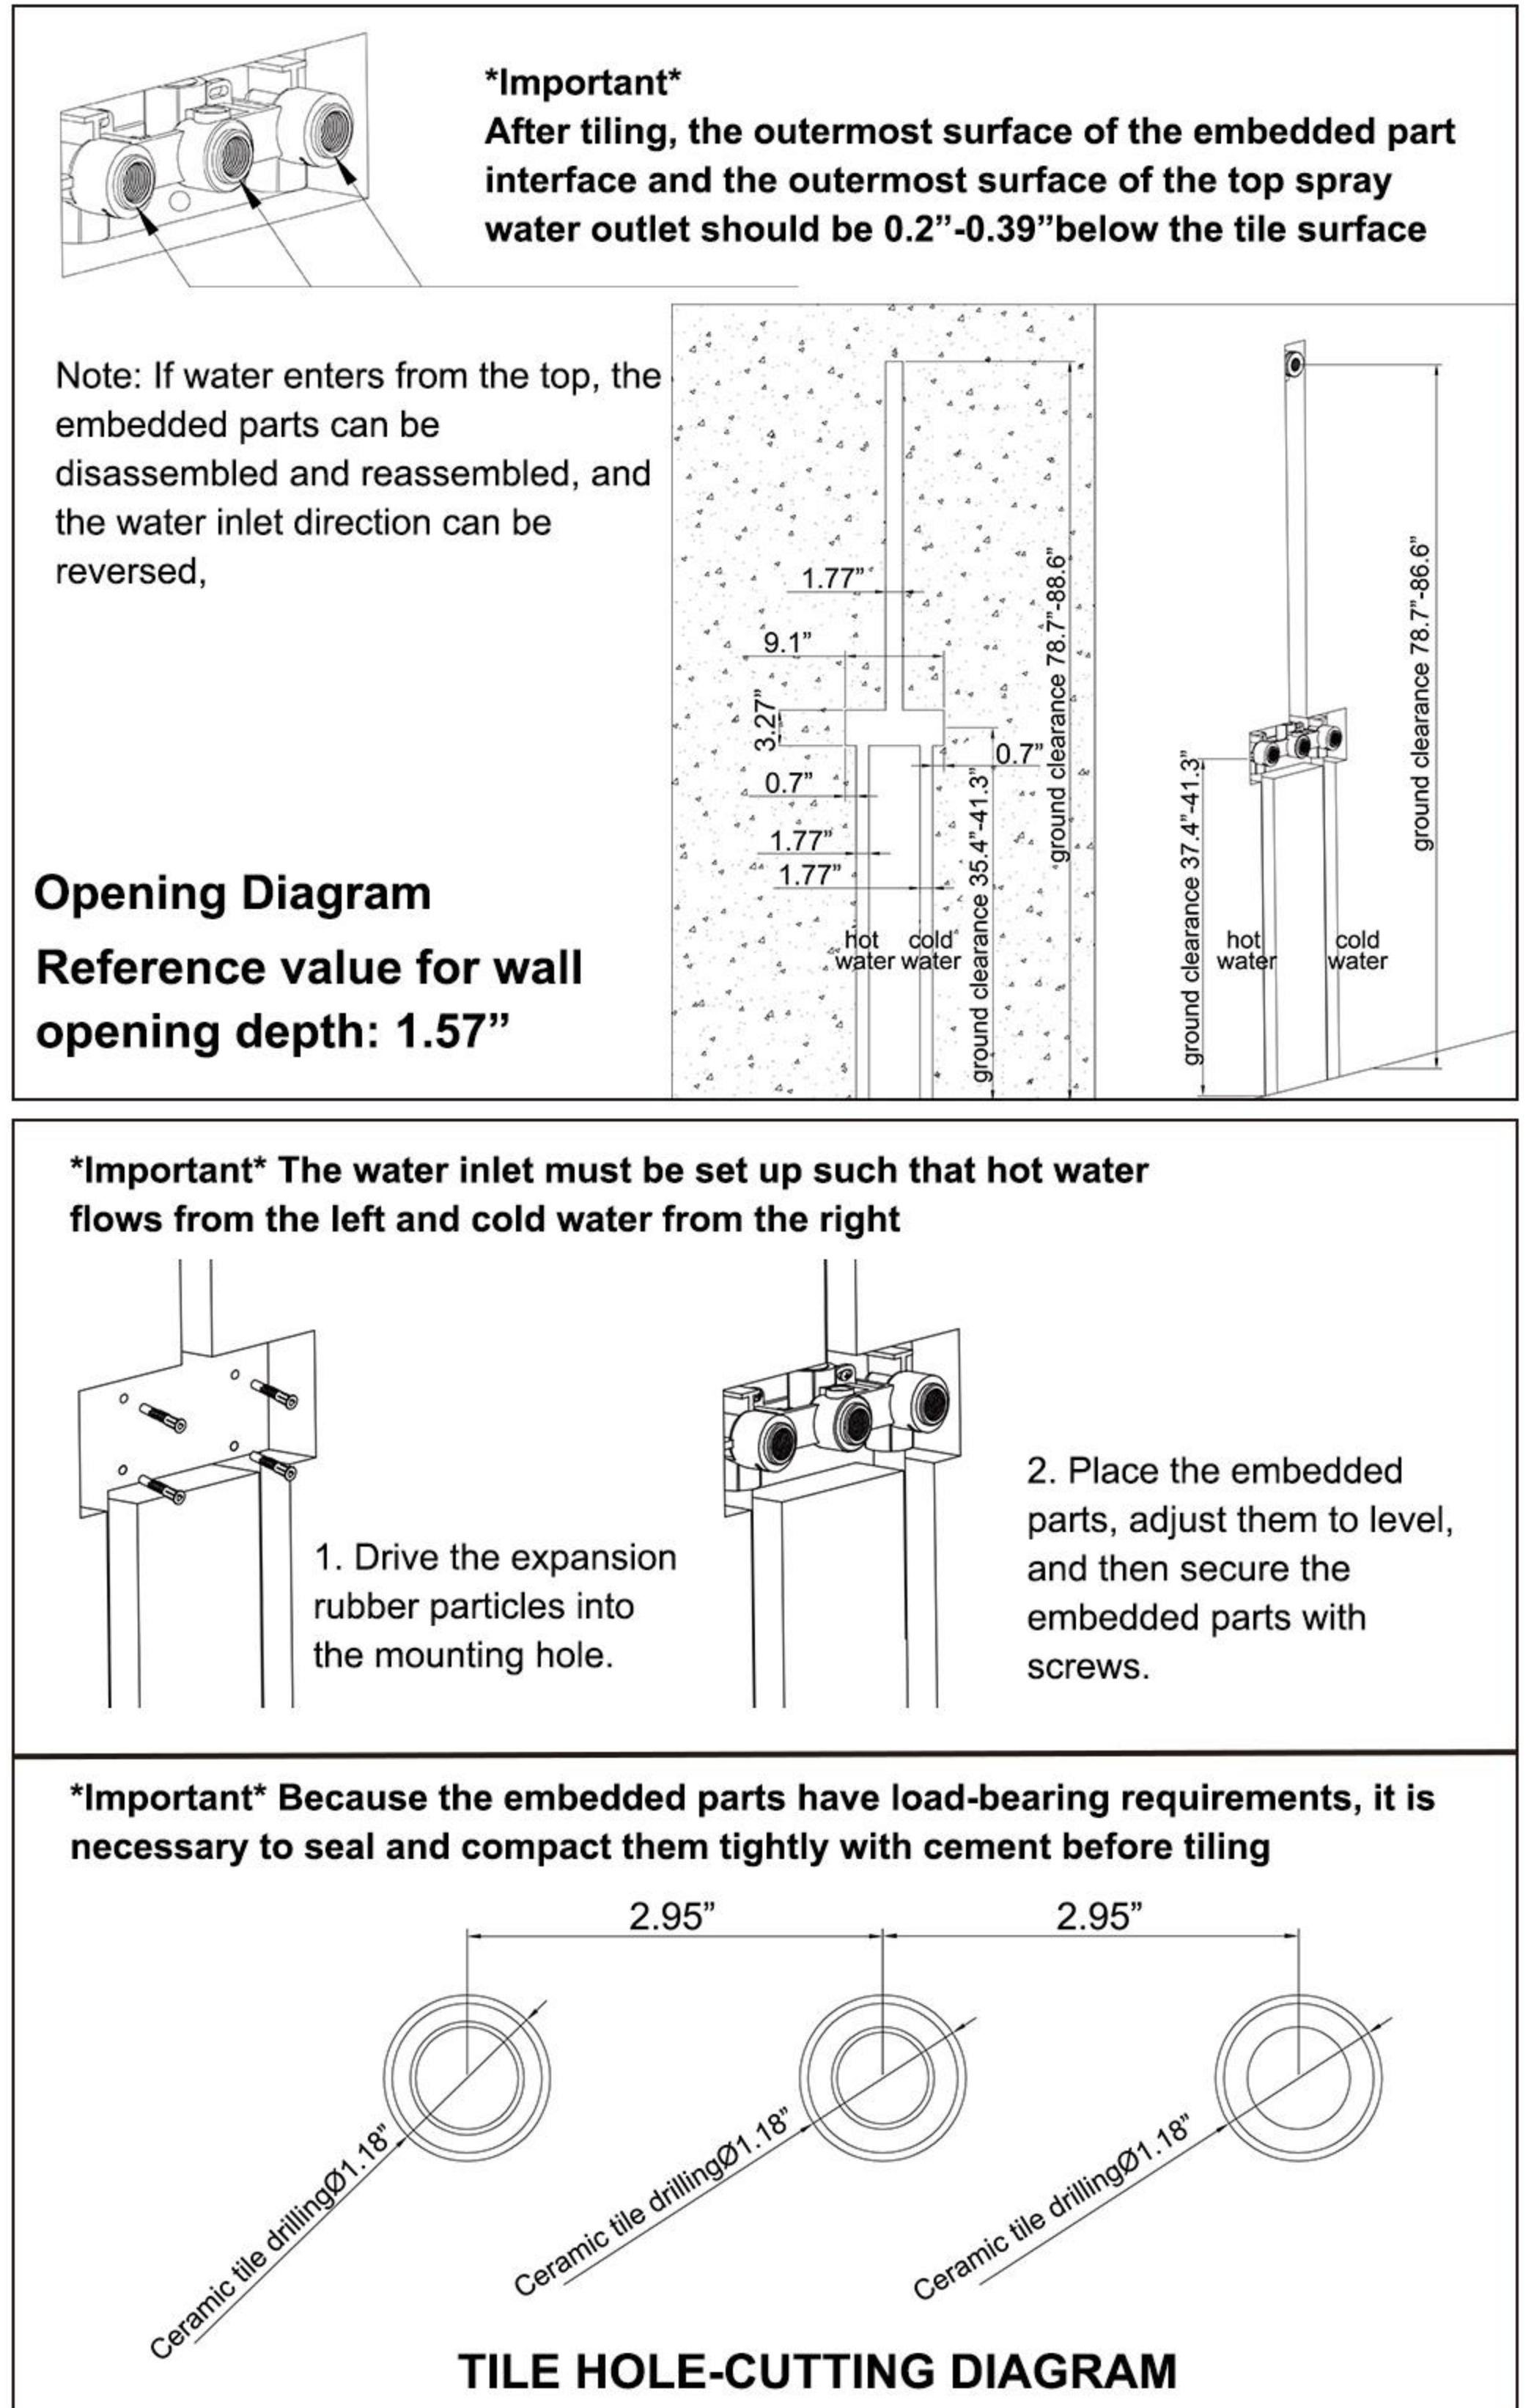4 Installation instructions for embedded parts






5 Installation Steps

Before installation, please confirm:

a. If the water inlet fitting is higher than the wall surface by more than 2mm, it cannot be installed.

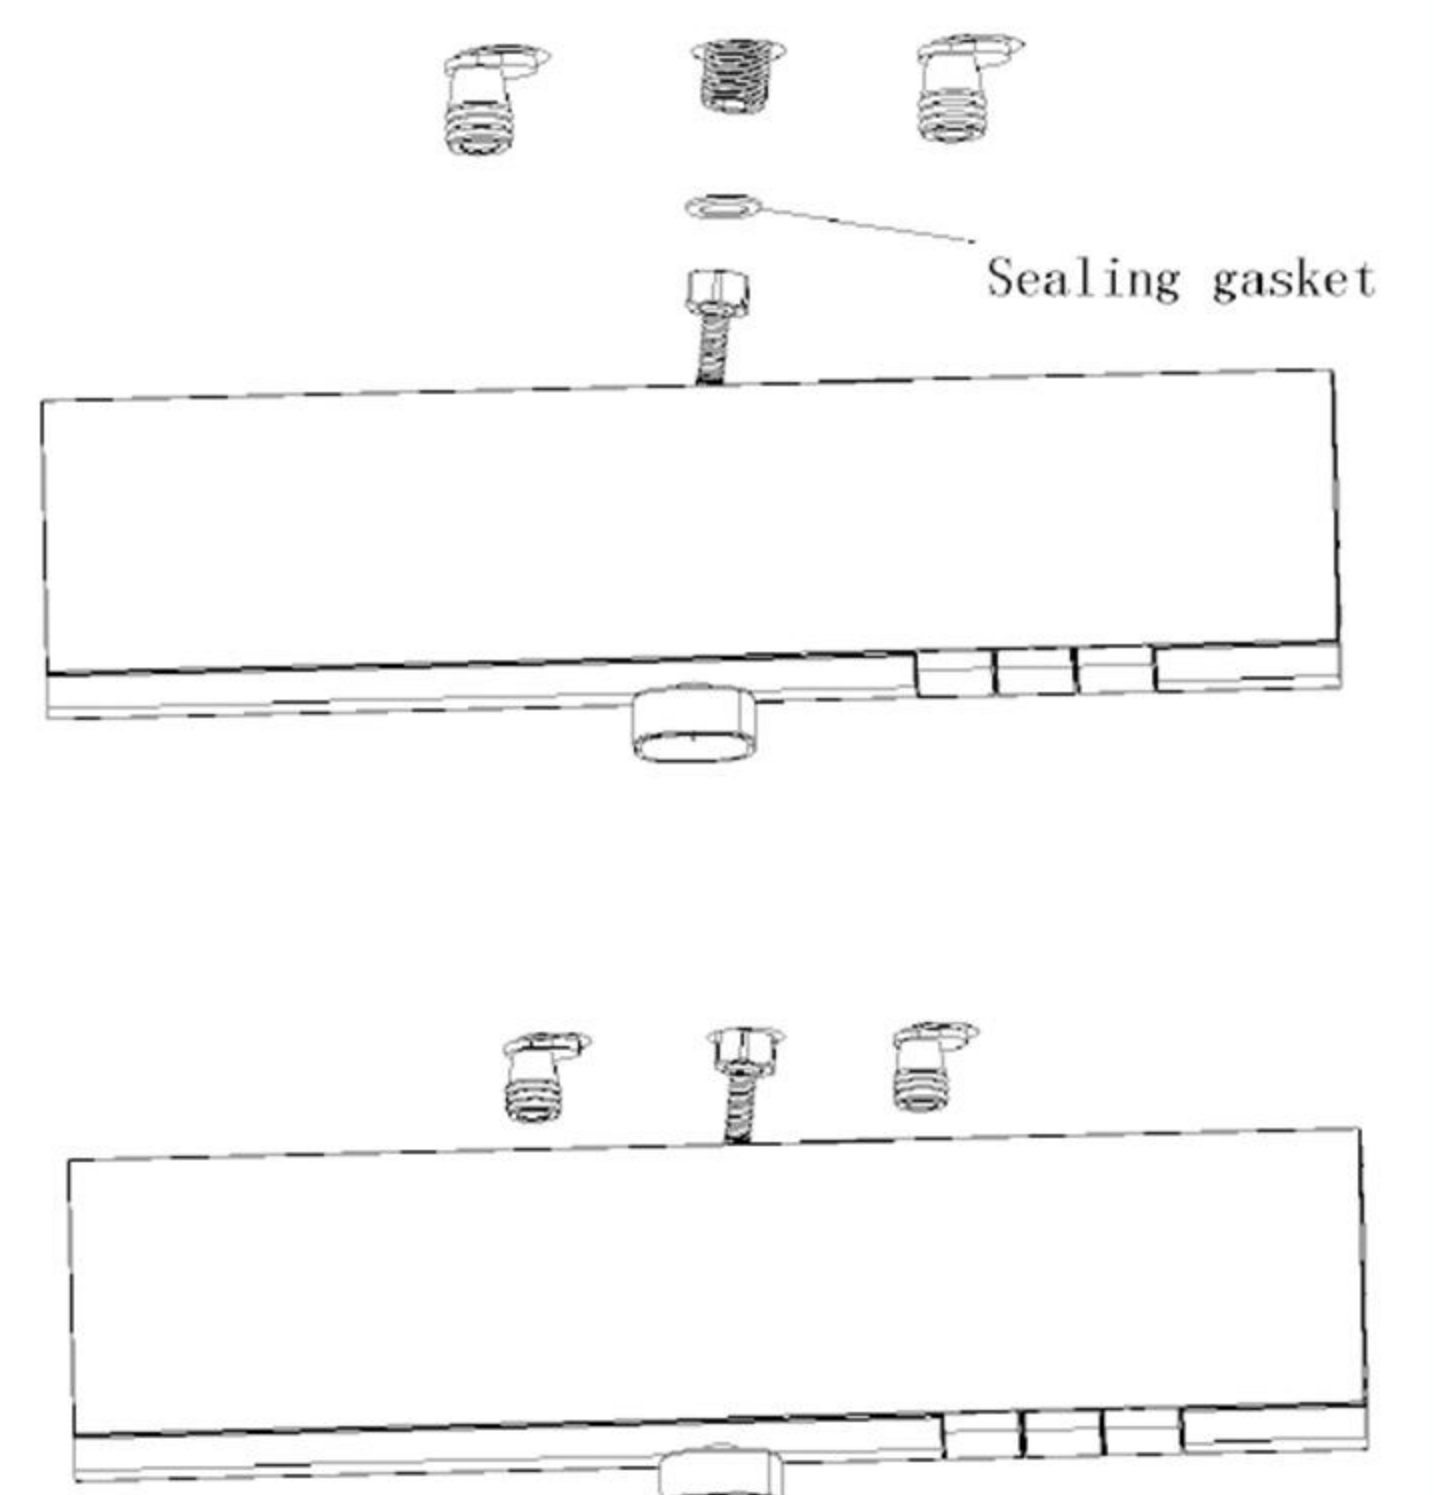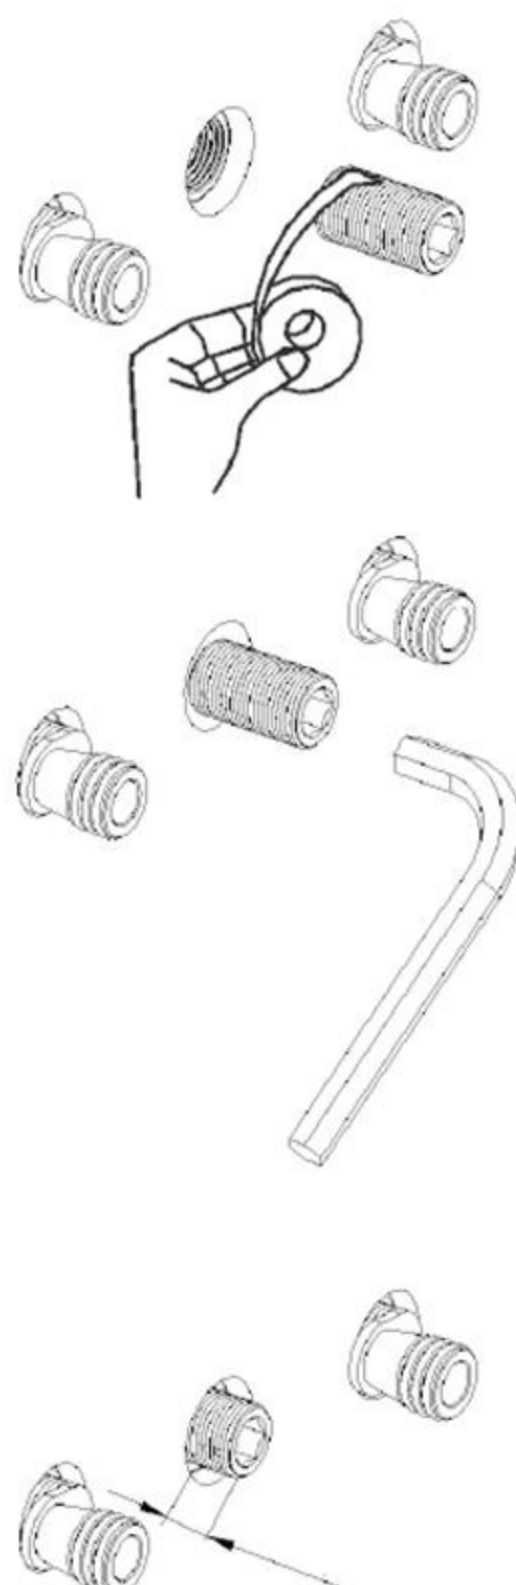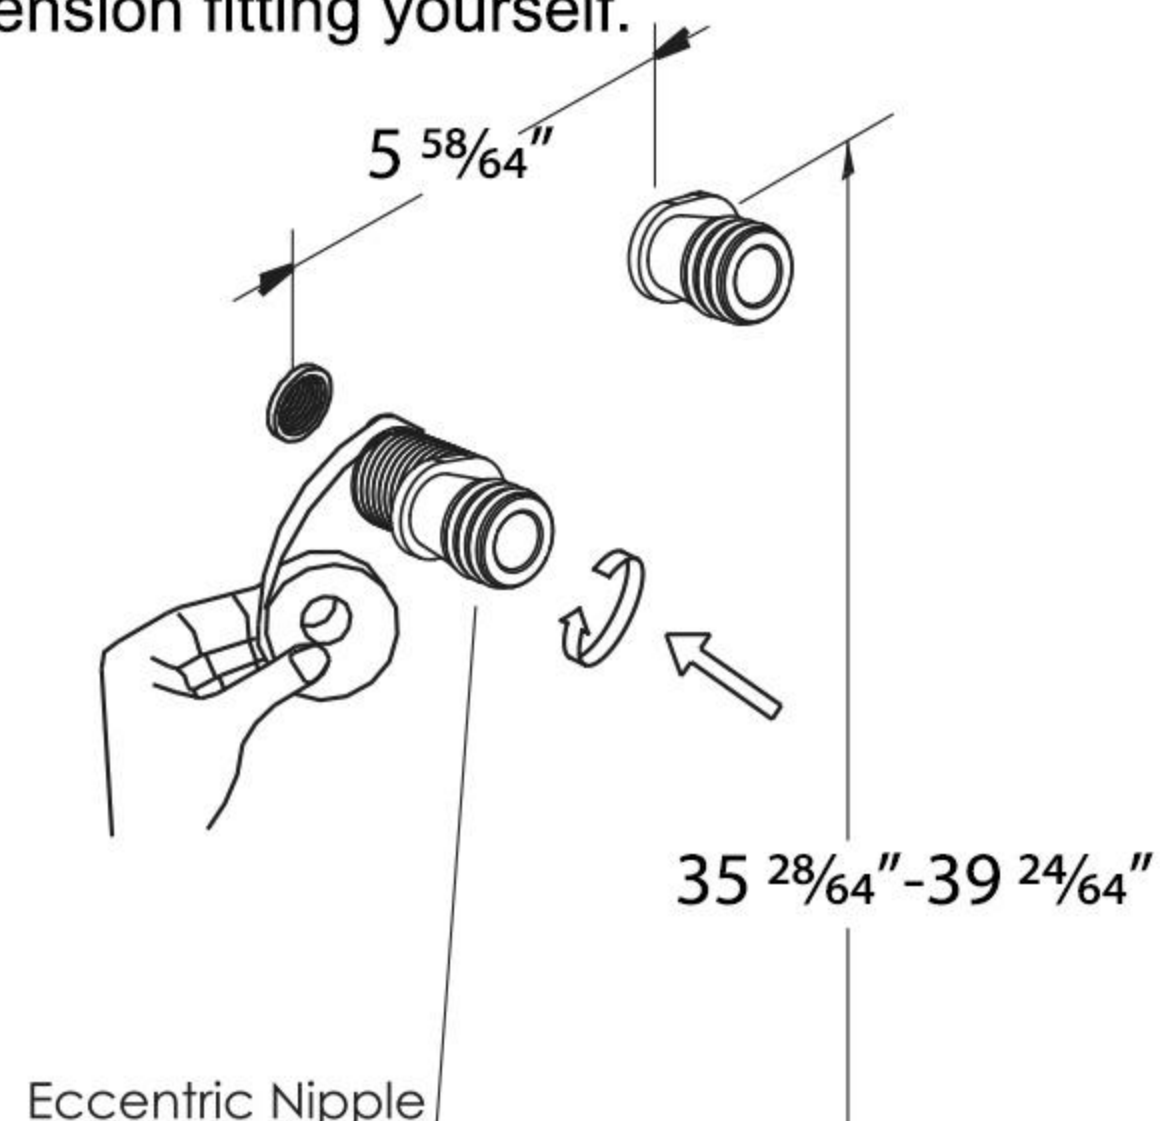If the water inlet fitting is lower than the wall surface by 15mm, you need to purchase an extension fitting yourself.



1

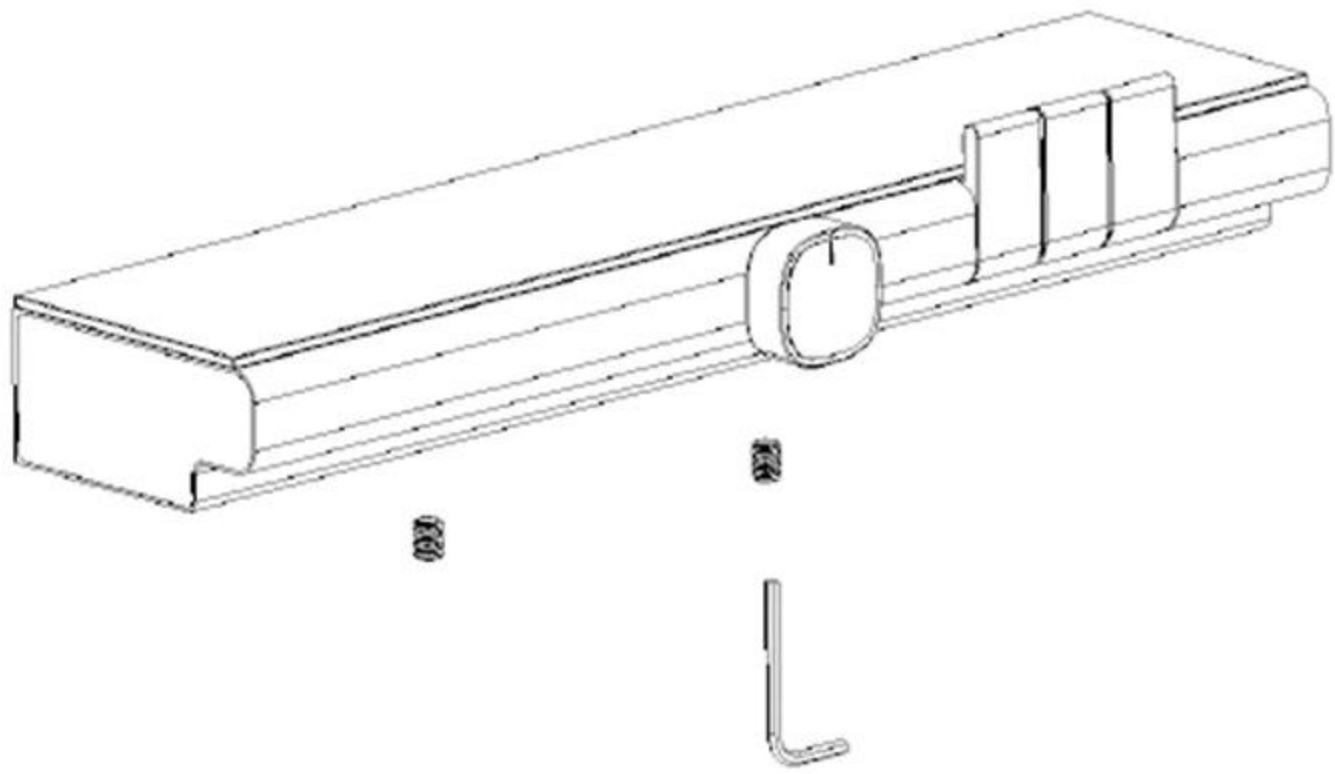
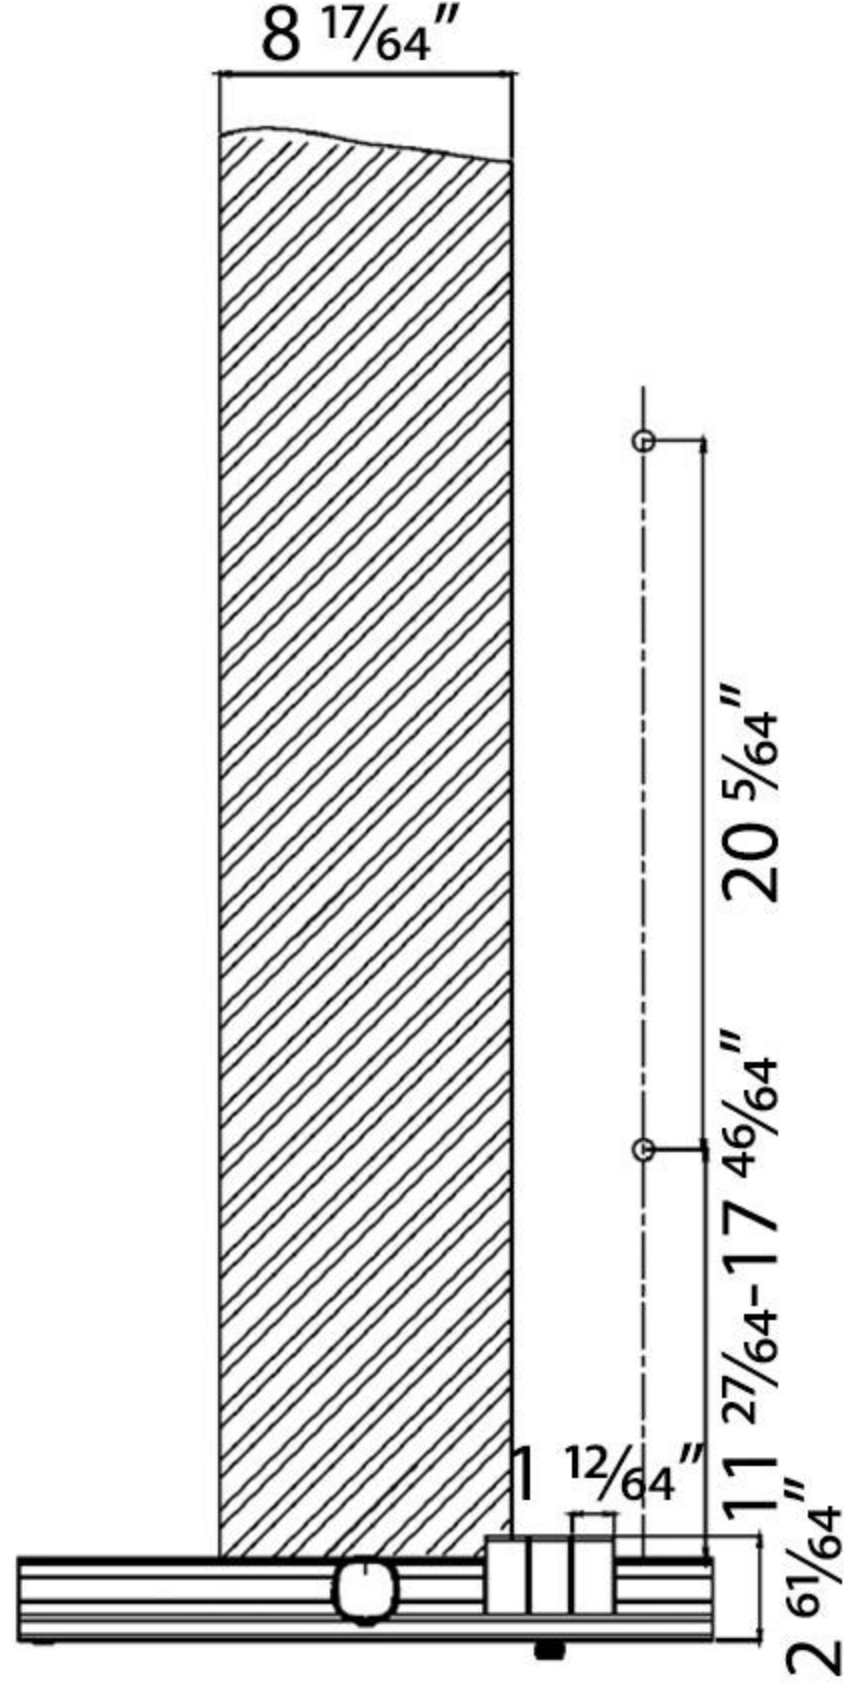
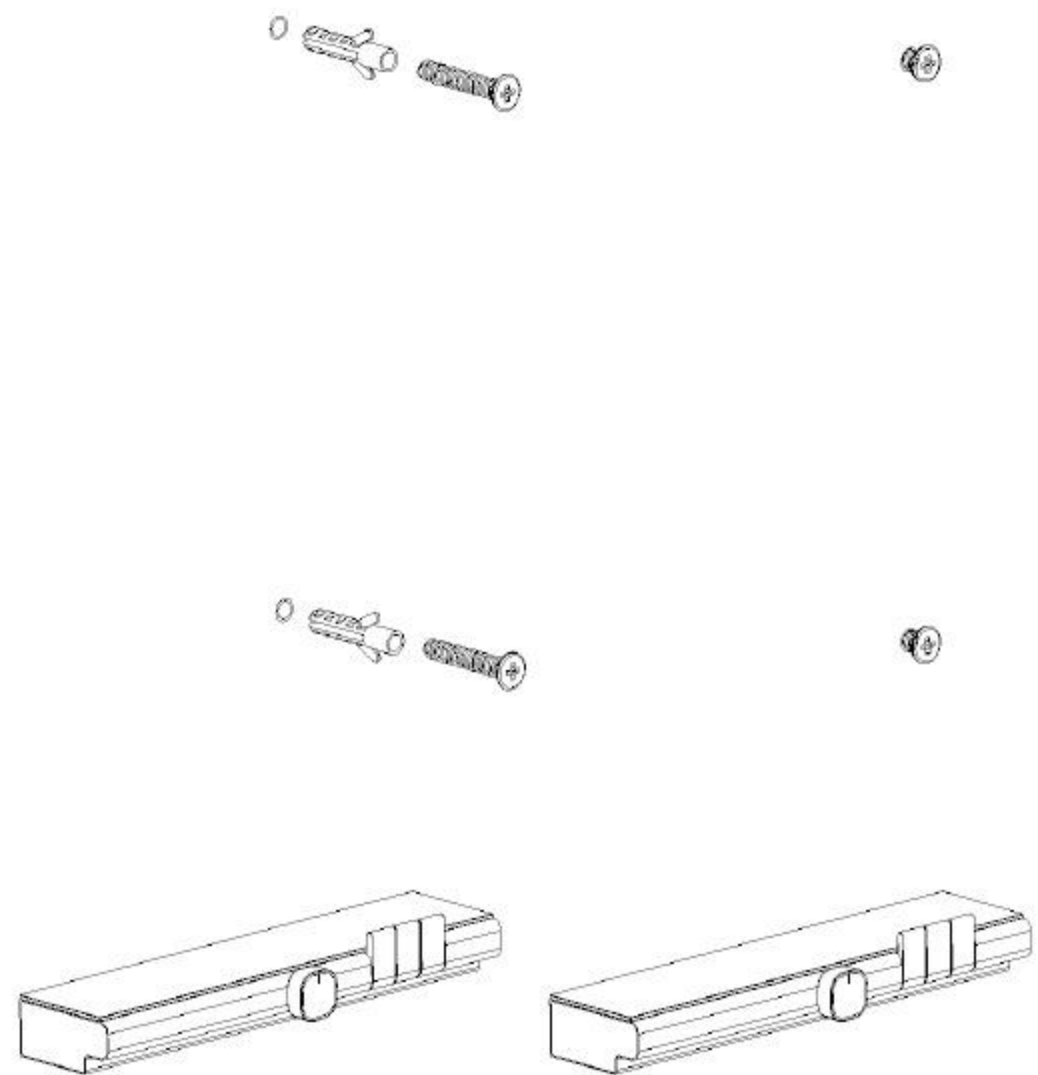
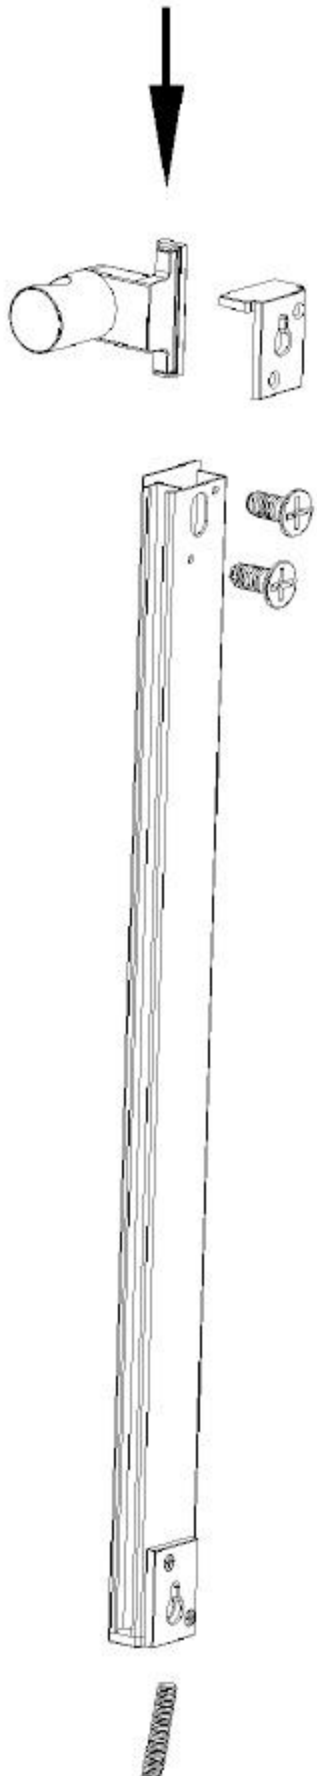
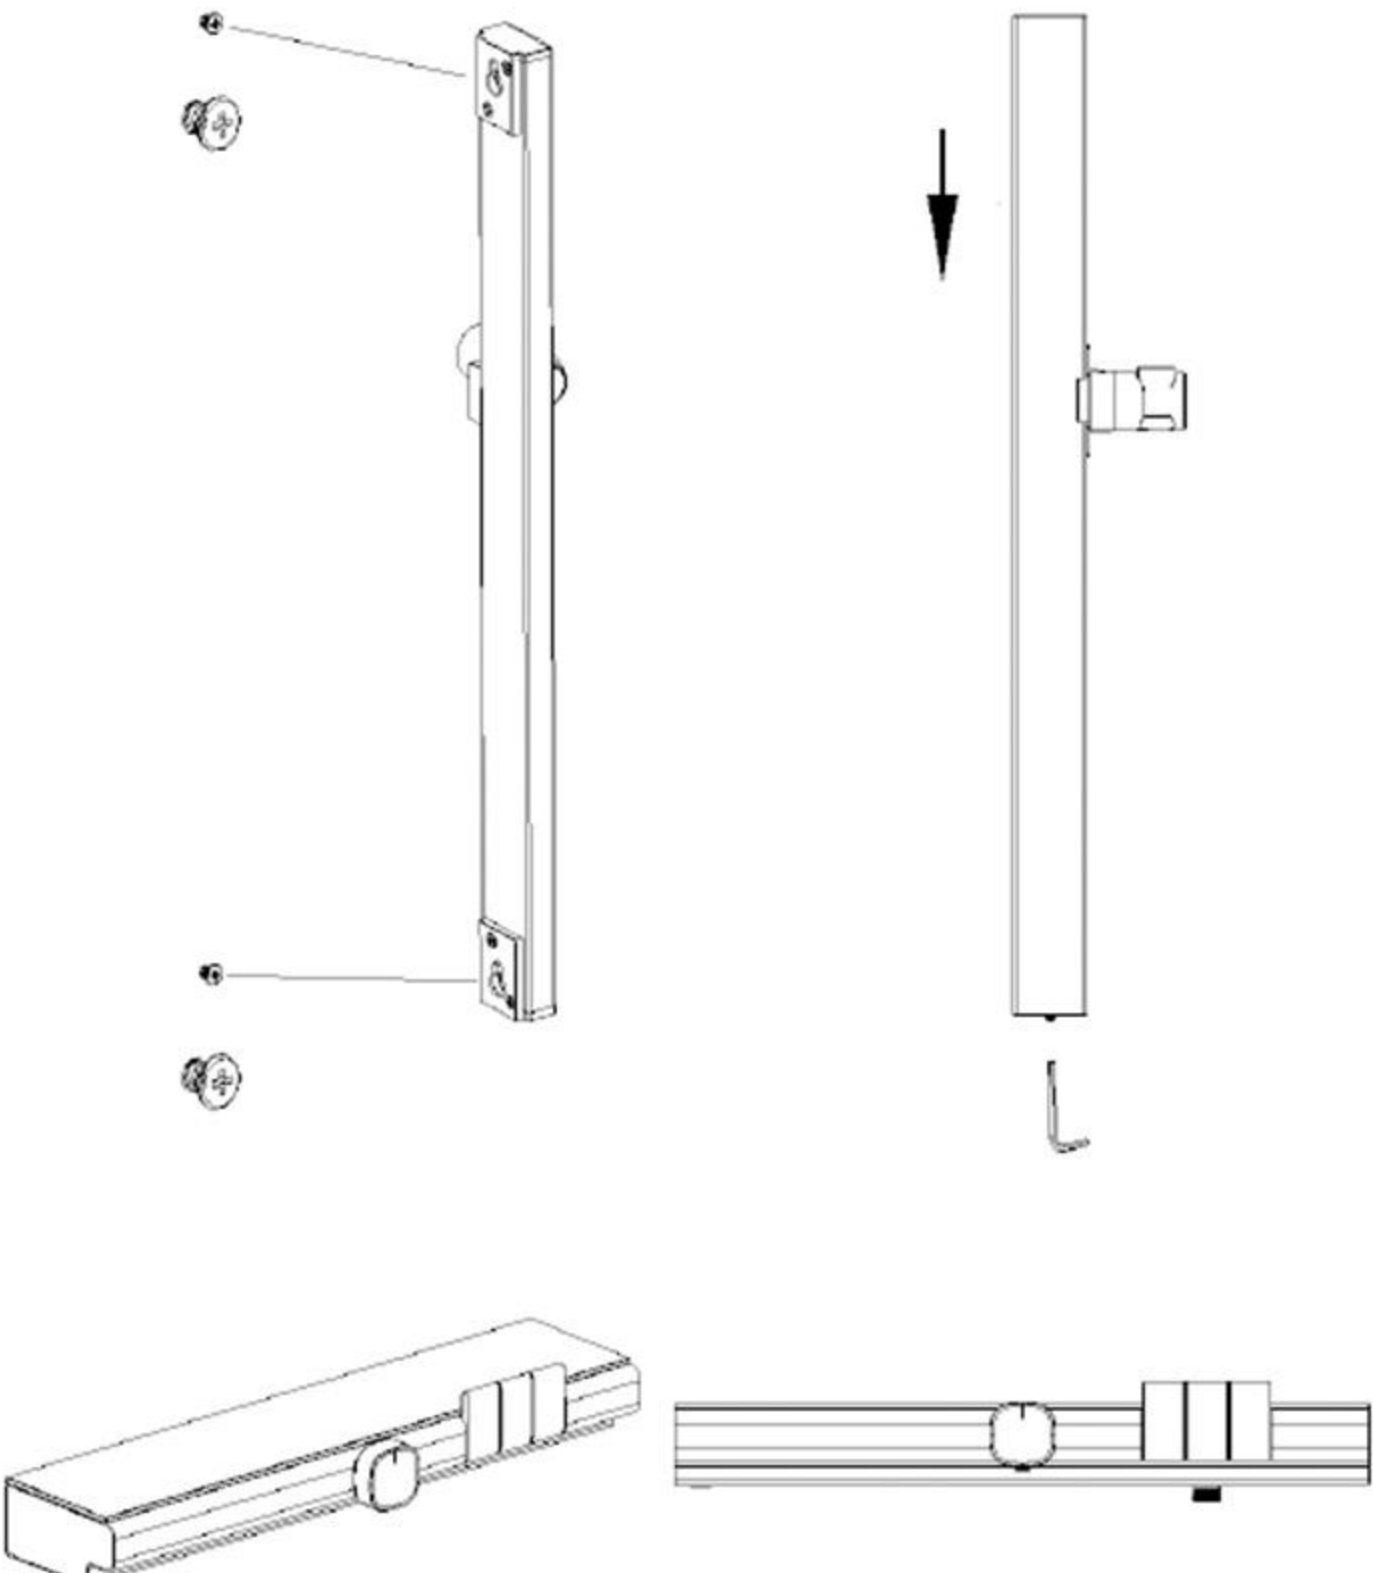
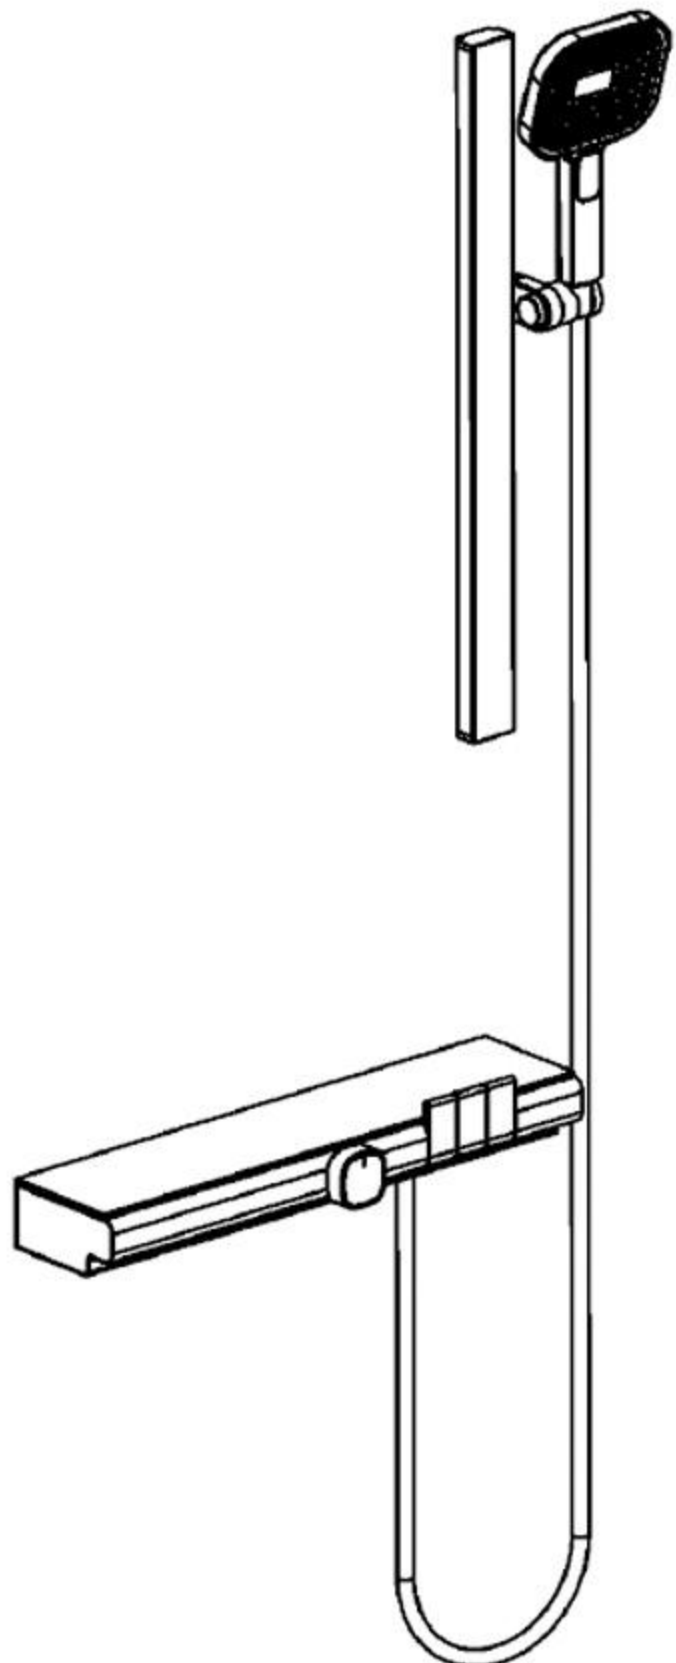
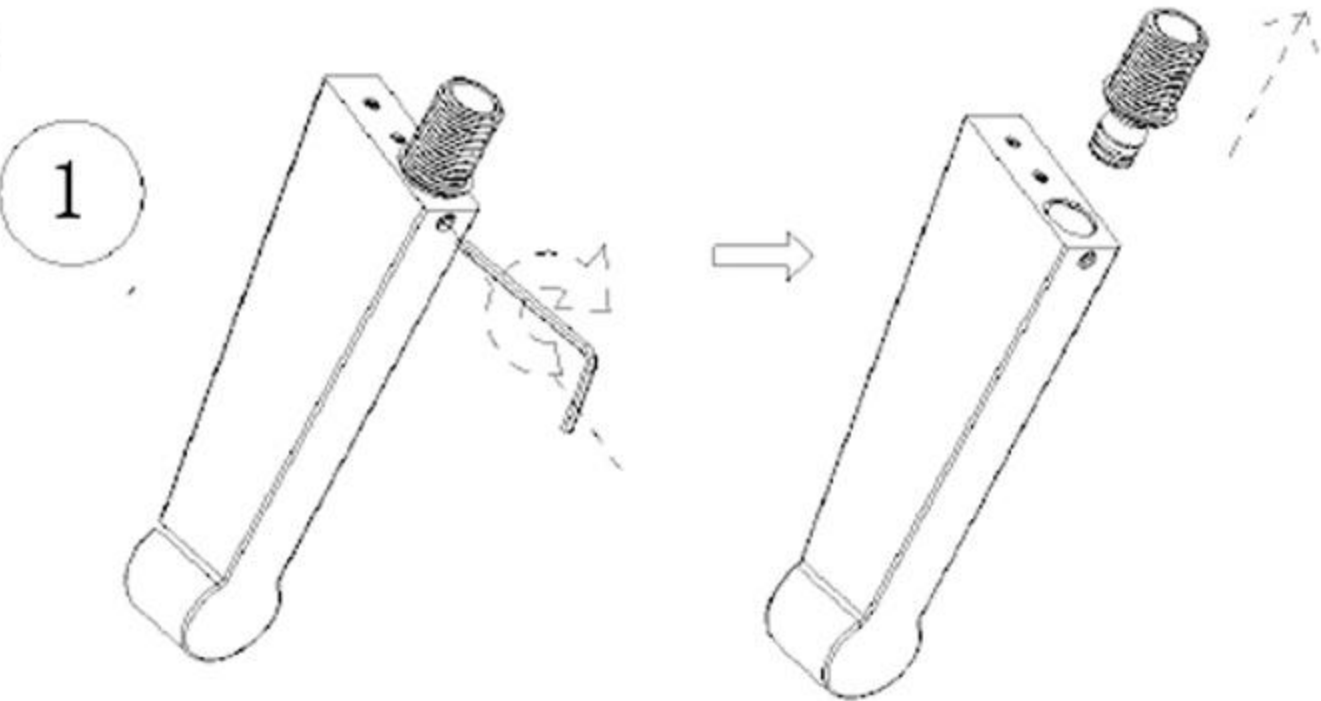
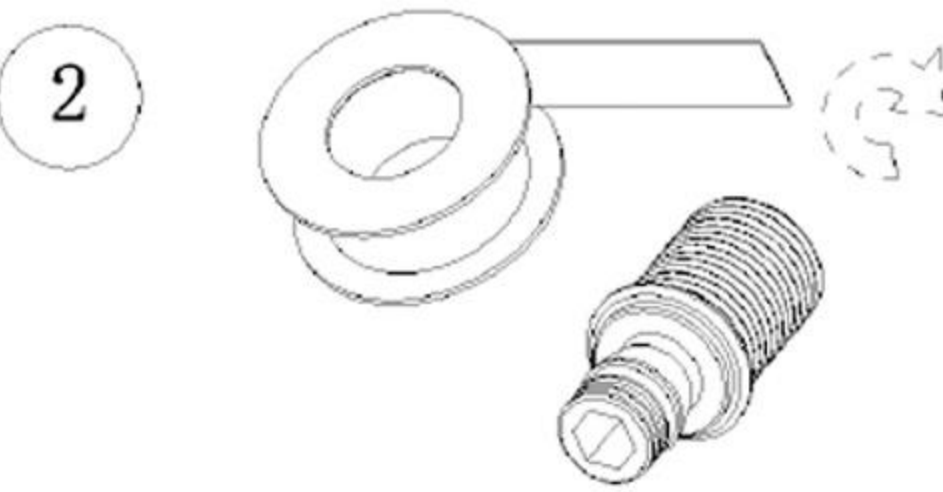
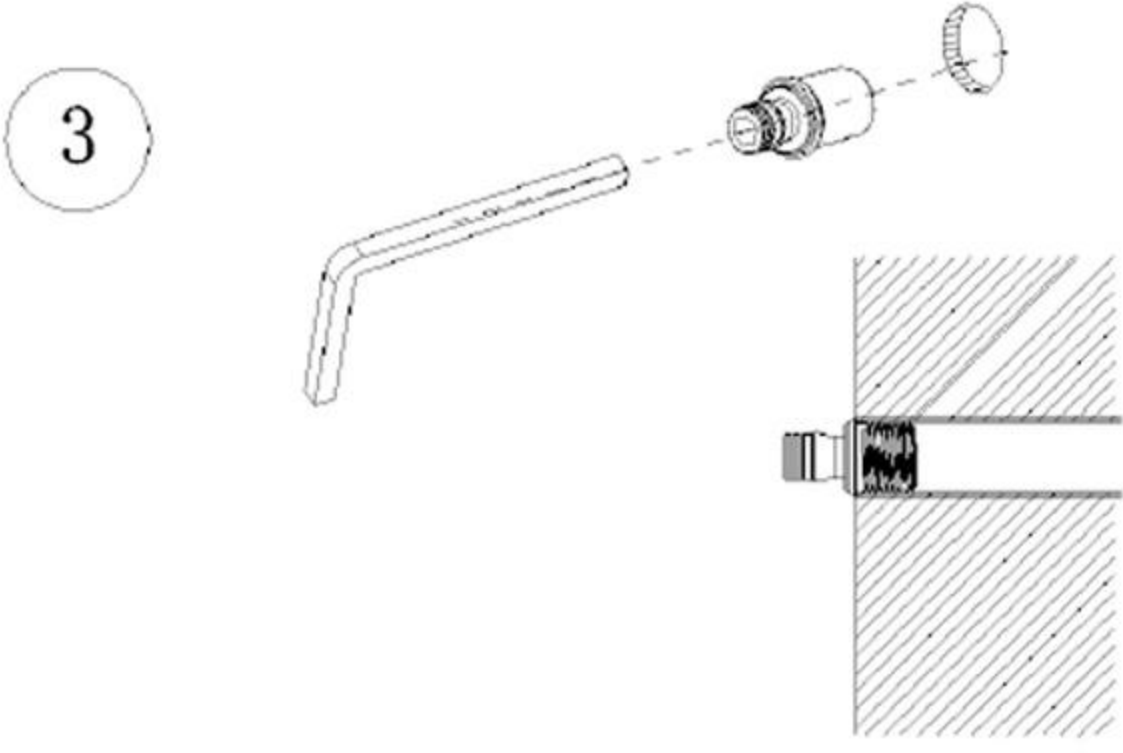
Apply pipe sealant to the threads of the eccentric nipples, then connect them to the inlet pipes. (The distance between the two water supply lines is 5.9 inches (150mm), and the distance from the floor surface to the water outlet is approximately 35.4-39.4 inches (900-1000mm).)




2

Install the overhead shower inlet fitting into the wall, wrapping it with a sealant tape. The depth of the fitting should be such that it protrudes from the wall by 0.2 inches to 0.3 inches.



3

Pull out the overhead shower water hose and screw it onto the middle inlet fitting.

		
4 Insert the body into the fitting, push it against the wall, and tighten the two screws at the bottom of the body.	5 Drill two fixing holes for the lift rod in the center of the body, according to the dimensions shown in the diagram. If the water inlet is from the top, pay attention to avoid drilling through the water pipe area when drilling holes.	6 Insert the expansion rubber ring into the hole and screw in the self-tapping screw. The depth of the self-tapping screw should be such that the lift rod can be inserted without loosening.
		
7 Loosen the two screws on the lift rod, install the hand shower holder, and unscrew the screws at the bottom of the lift rod.	8 Align the two holes on the back of the lift rod with the two screws on the wall, and pull down, so that the lift rod holes fit into the screw heads and tighten the screws below the lift rod.	9 Pull out the overhead shower water hose and screw it onto the middle inlet fitting with a wrench.
10 1  Loosen the Allen wrench screw and remove the fitting on the outlet arm.	2  Wrap the tail of the fitting with a sealant tape.	3  Screw the fitting with the sealant tape wrapped around it tightly into the water pipe.

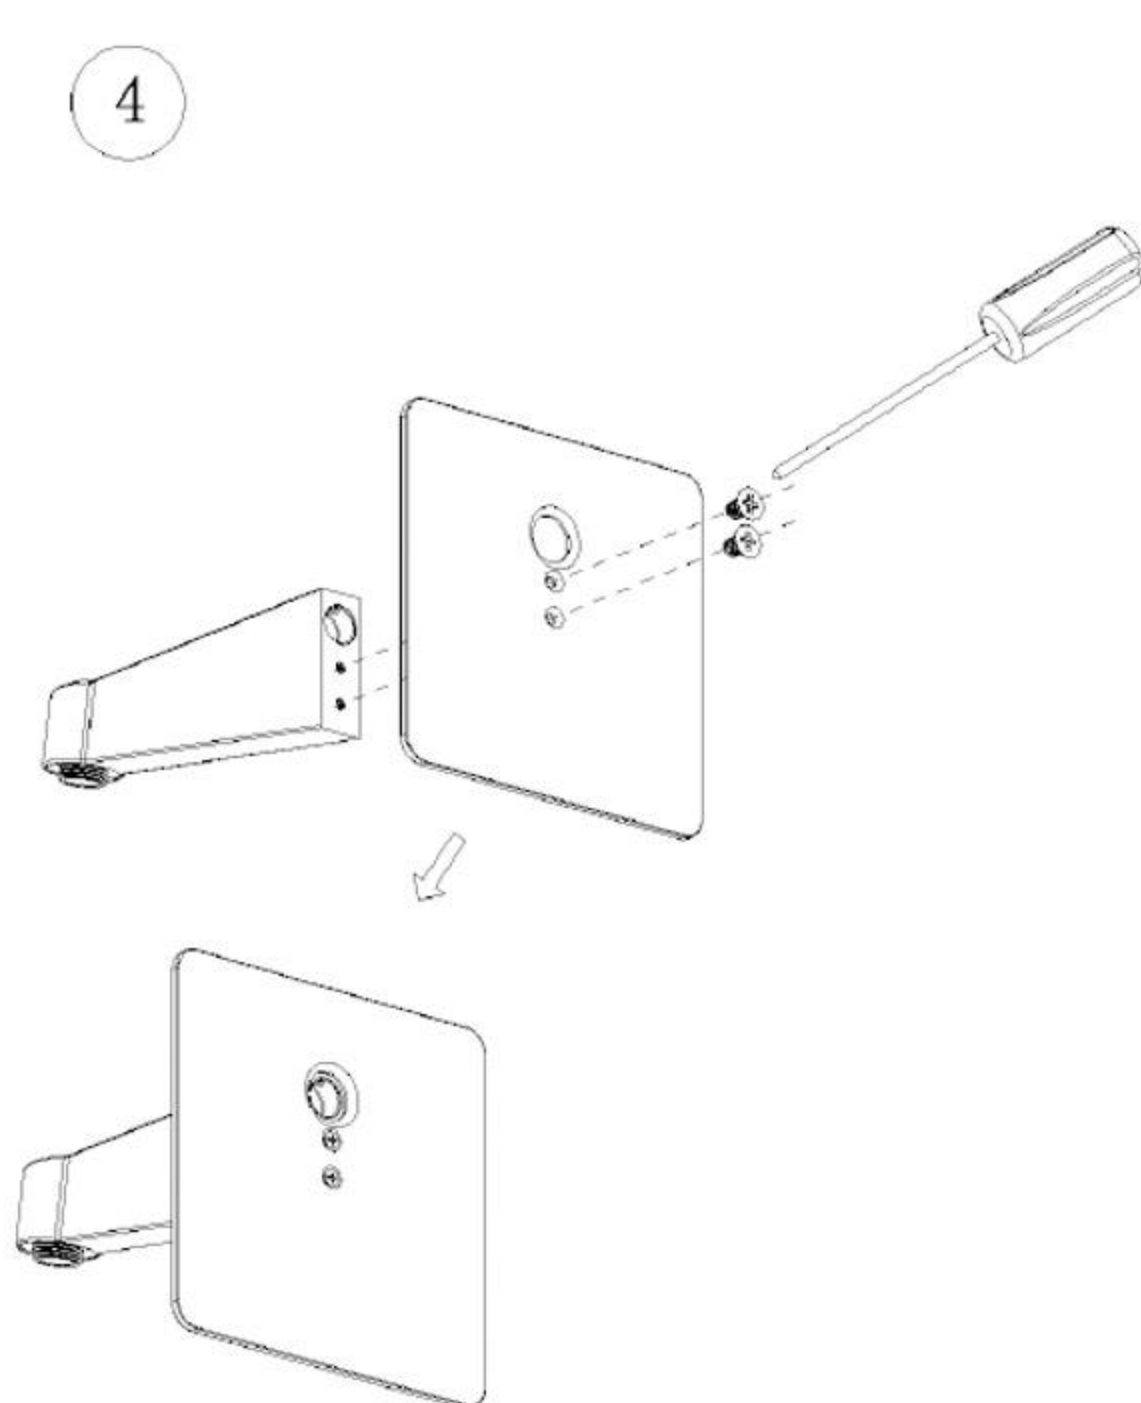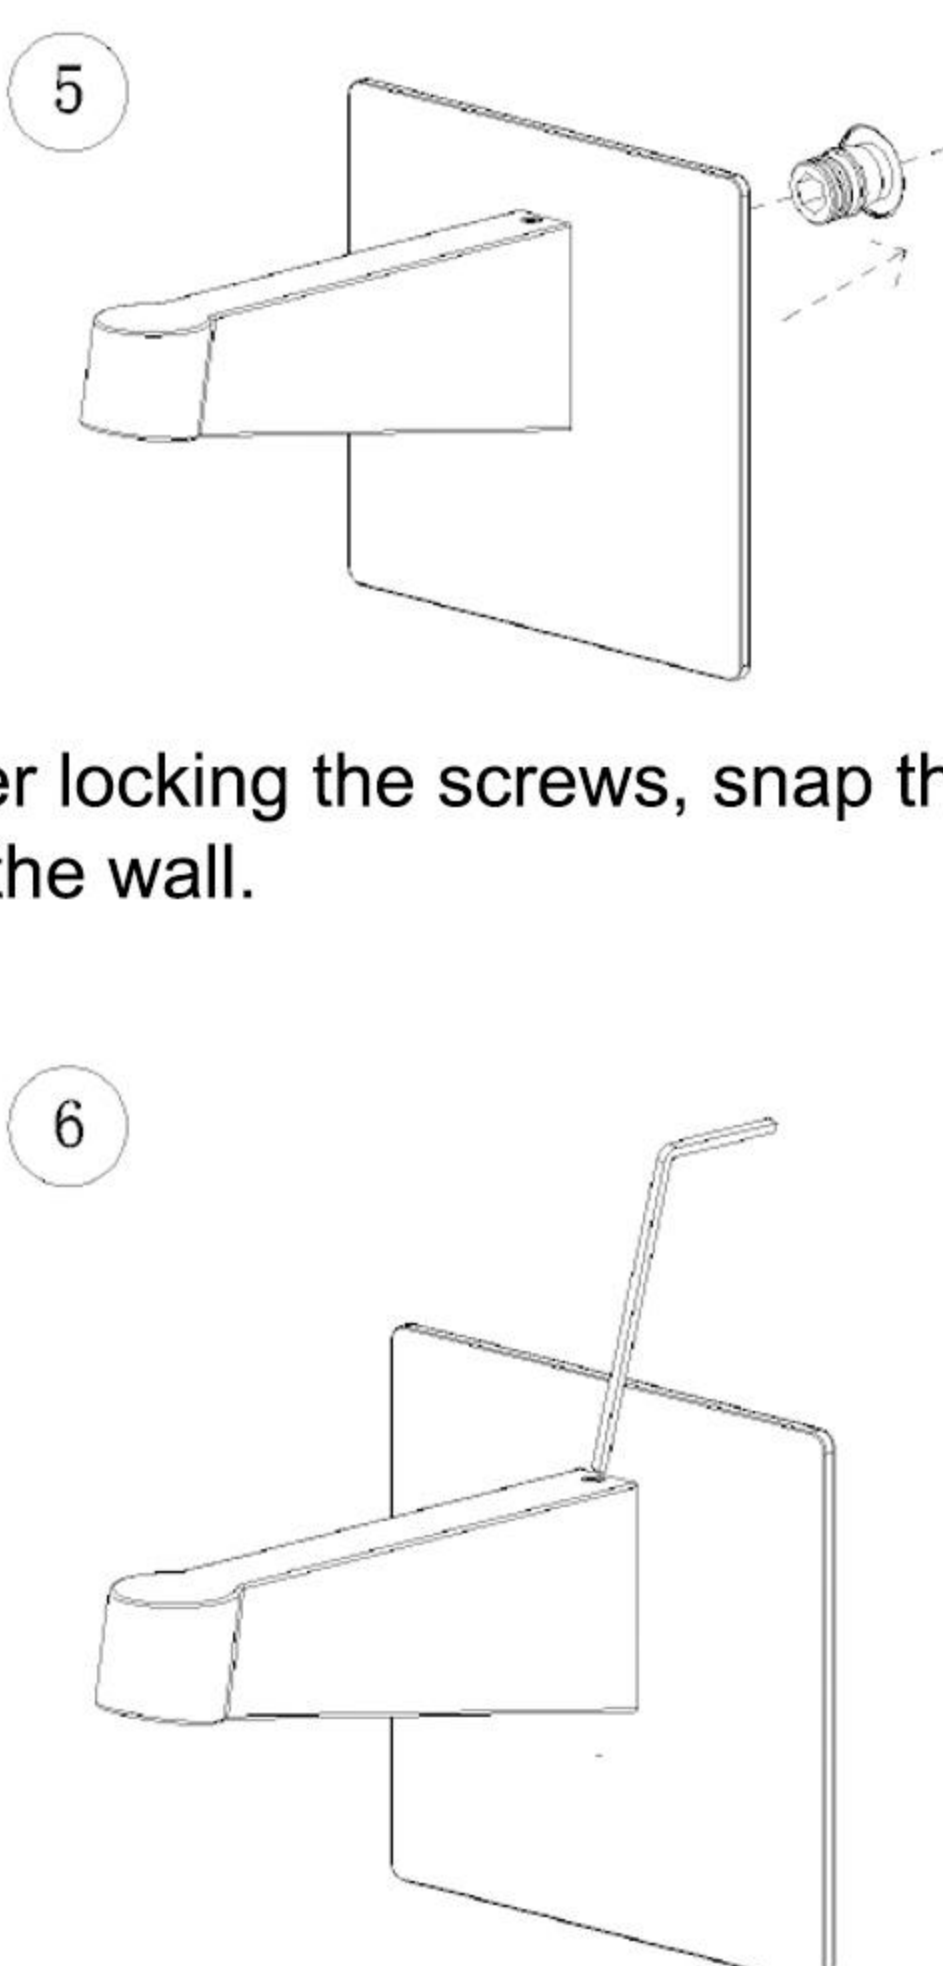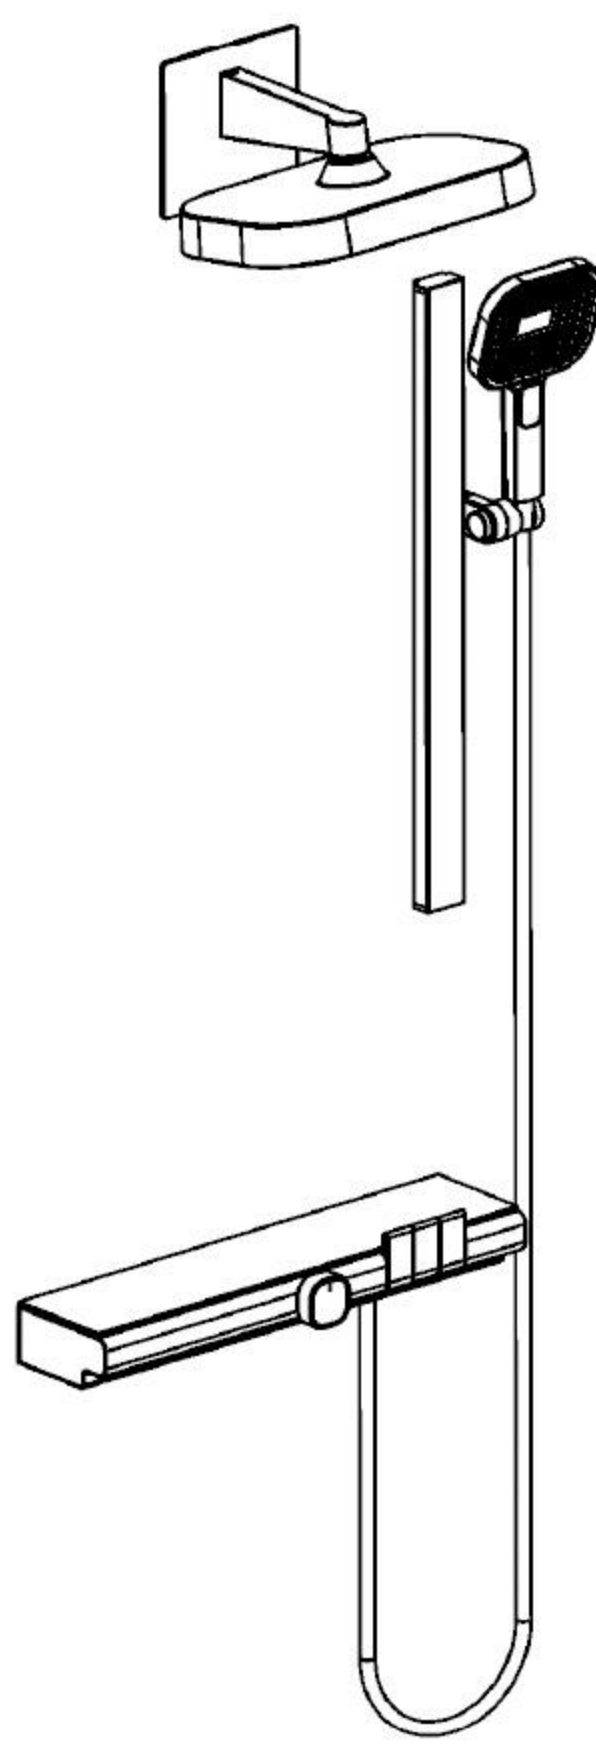11  Lock the decorative panel with two screws behind the upper outlet arm as shown in the figure.	12  After locking the screws, snap the fitting on the wall. Tighten the Allen wrench screw with a hexagon wrench.	13  Install the overhead shower.
---	---	--

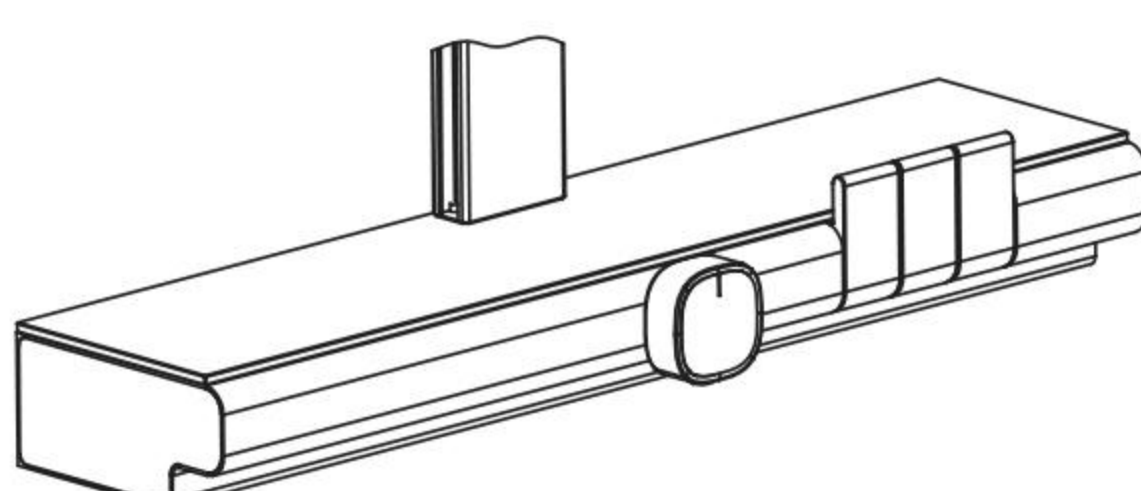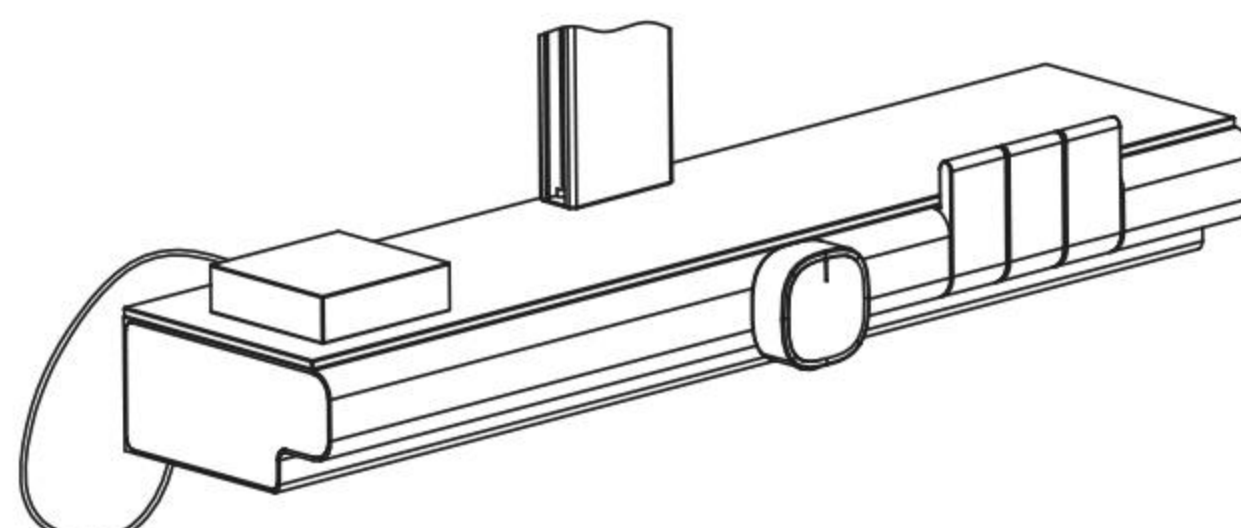6 User Guide

 Independent handwheel temperature adjustment, three water distribution switches independently controlled.	 The product's temperature display and atmosphere lamp are powered by a lithium battery. When the temperature display and atmosphere lamp flash, it needs to be charged. Simply use a power bank to insert the Type-C charging port at the bottom of the body. When charging, the atmosphere lamp will light up, and the lamp will go out when it is fully charged.
---	--

7 Mixer Care and Maintenance Tips

a. Regular Cleaning:

For daily or regular cleaning, simply wash the mixer with clean water and wipe it dry with a soft cotton cloth.

Avoid using cleaning powder, polishing powder, abrasive detergents, or nylon brushes, as these can scratch and damage the surface.

Do not use acidic cleaning agents. If the mixer comes into contact with any harmful acids, rinse it immediately with clean water.

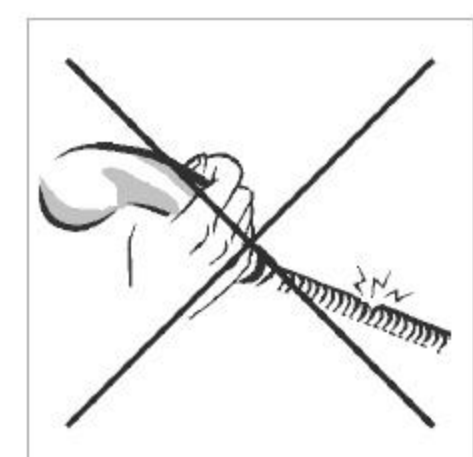
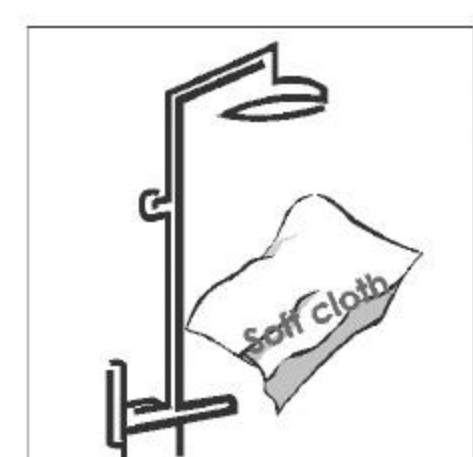
b. Deep Cleaning:

For deeper cleaning:

First, remove as much dirt and grime as possible with clean water and a soft cloth. Then, use one of the following cleaning agents:

- Mild liquid cleanser
- Colorless glass cleaner with no abrasives (ensure it completely dissolves according to instructions)
- Non-abrasive polish liquid

After cleaning, thoroughly rinse off all cleaning agent with clean water and wipe dry with a soft cotton cloth.



For customer support or assistance with product installation, please feel free to contact us:

Our dedicated support team is available to assist you and provide the best customer service experience. Please don't hesitate to reach out if you have any questions or encounter any issues.