


ASSEMBLY INSTRUCTIONS

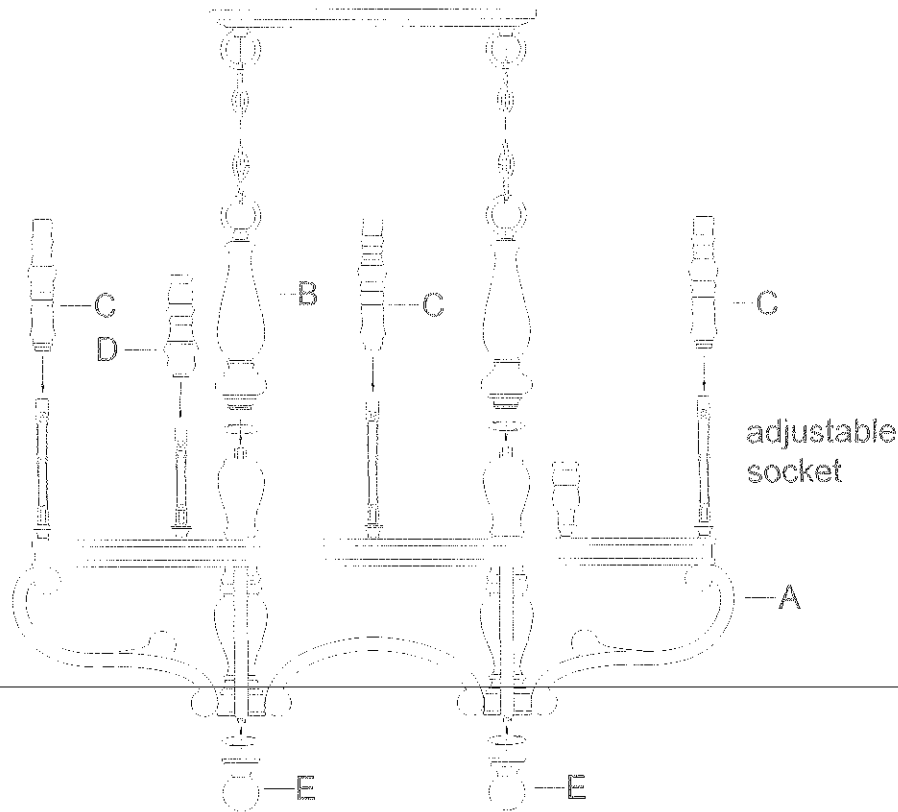

B → A → E → C → D

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point **OFF**.
3. Unravel the supply power and ground wires and pass them through the center holes of center column assembly (B).
4. Thread the center column assembly (B) to the coupling at the top of fixture body (A). Hands tighten until snug.
5. Thread the finial (E) onto the nipple of fixture body (A). Hands tighten until snug.
6. Adjust the adjustable sockets to the same height of the candle sleeve of the fixture body (A). Then fix them at the height. Place the candle sleeve (C), (D) over the socket of the fixture body (A)
7. Referring to the installation instruction with the product for the wiring and installation.
8. Install proper bulbs (NOT included) to each socket referring to the markings and / or labels on the fixture for maximum wattage.
9. Retain power to the installation point ON and retain this sheet for future reference.


INSTALLATION INSTRUCTION For Safety Cable Installation

In INSTRUCTION:

This fixture is provided with a Safety Cable. The Safety Cable provides a back up system for the fixture's frame and the installation hardware. It is essential that the Safety Cable be properly installed. The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box. The Cable must be terminated with **SLEEVE** specifically sized for the Cable per the following steps:


1. Insert enough cable through one side of the sleeve to form a large loop,
2. Wrap the Cable around the Structural Member or Top Chain Link;
3. turn back the cut end and inserting into opposite side of sleeve. Use two sleeves if desired.
4. Pull back on cable until desired loop size is obtained. It is recommended to use thimble in loop.
5. Allow 1/8" of cable cut end to extend beyond end of sleeve. Make sure this does not slip back into sleeve while swaging.

Please refer to the below Fig.1 & Fig.2 for the detail information!

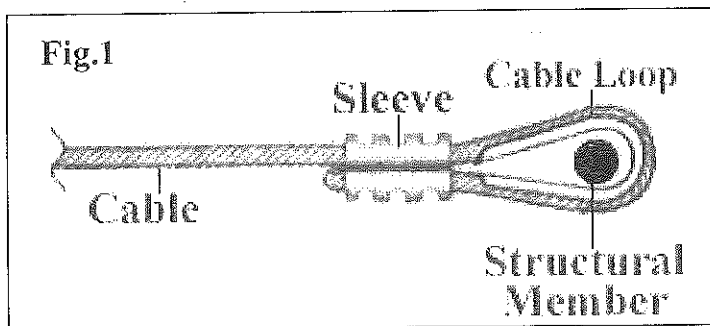

Safety Cable must be mounted on the chandelier **TOP CHAIN LINKS**.

This is a sketch for only Safety Cable mounting, to **CHAIN**. The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box.

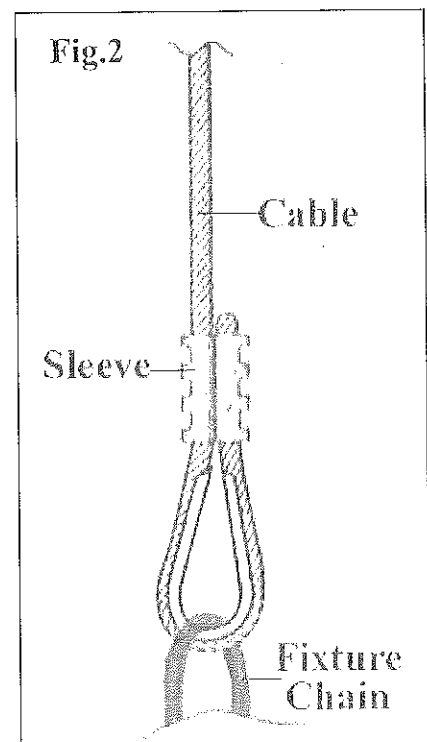

****Remark:** Pls make sure all hardware is properly tightened and that the cable is positioned clear of any obstructions.!**