



LED INTEGRATED TUBE LIGHT





Integrated Led linear lamp 2-8 foot; Surface Mounted LED Tube


DESCRIPTION

- * Integrated Led linear lamp 2-8 foot;
- * Environmentally friendly without mercury;
- * 50,000 hours or more working time and 5 year warranty;
- * 130-140 LPW high lumen efficiency;
- * No mercury glass so NO Regulated Universal Waste rules or fines.

COMMON TECHNICAL DATA

Color temperature	3000 / 4000/ 5000 / 5700K
CRI	85
Operation Temperature	-68~122 °F
Input voltage	AC 100-277V
Power factor	0.95
Warranty	50,000 hours / 5 years
Housing material	Aluminum + pc
LED type	SMD2835
Lumen efficiency	130-140 LPW
Base	Easy Link

ETL NO.: 500319

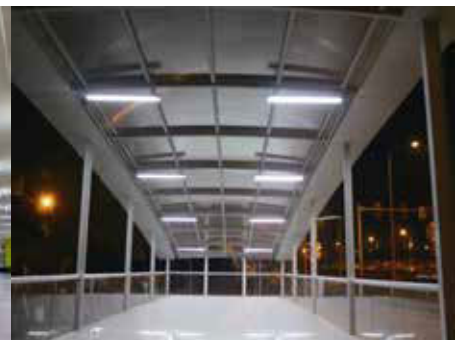

Part No.	Wattage/Length	lm/w	Lumens	Cover	ETL/DLC
T8-30P4FT-INT	30W 4ft	130-140	3900 LM	Clear Lens Striped Lens	listed

WARNING

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and hazards involved.

Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.

Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

To avoid potential fire or shock hazard, do not use this retrofit kit in luminaires employing shunted bi-pin lampholders. Note: Shunted lamp holders are found only in fluorescent luminaires with Instant-Start ballasts. Instant-start ballasts can be identified by the words "Instant Start" or "I.S." marked on the ballast.

WARNING


- Not for use in vapor-tight fixture.
- Not for use with dimmers.
- Not suitable for outdoor use.
- Not suitable for high temperature or damp locations.
- Not suitable for heavy air polluted locations.
- Please turn off the power before replacing new bulb.

CAUTION

- Risk of electric shock;
- Use in dry locations only.

PACKAGE

	Dimensions	pcs/ctn	kg/ctn	20GP	40HQ
Value	125*37*23cm	50	21	1,300pcs	40,000pcs
Value	243*20*18cm	20	19	6,500pcs	15,000pcs

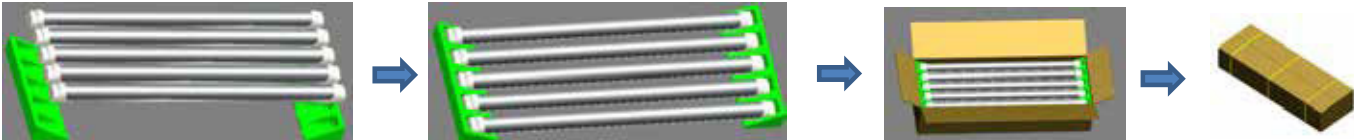

REMARK

- All of the mechanical, electrical and light characteristics in this document are typical value.
- LM-79, IES file is available

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. If this product fails during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. ZOHNSON does not take responsibility for any installation costs associated with the replacement of this product. This warranty is an addition to the statutory rights in the country of purchase.