FRAMELESS LED MIRROR

With Front and Backlit

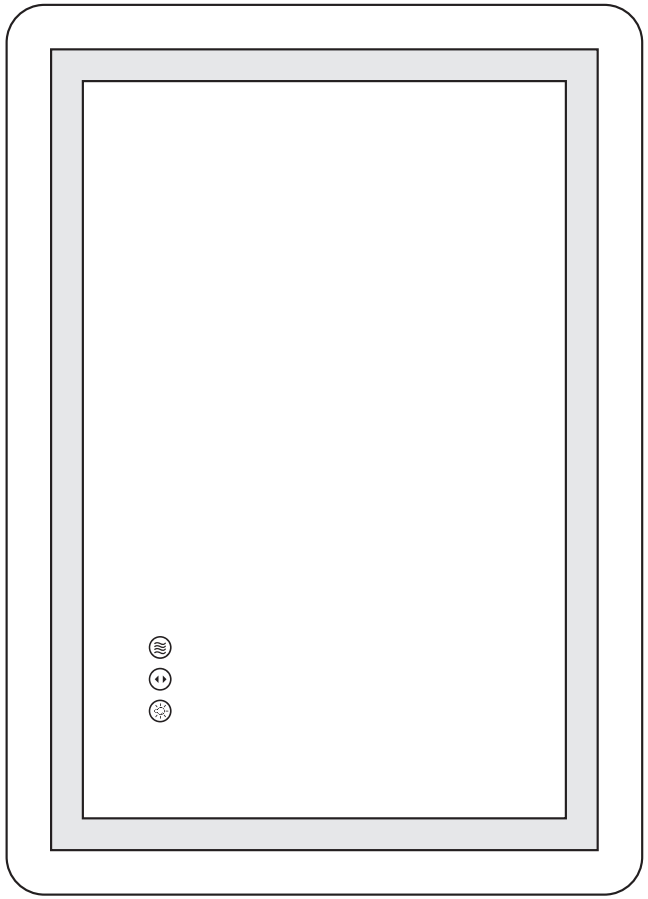

User Manual

Before Installation

Thank you so much for choosing our mirrors, in order to facilitate the use of our products, please read this instruction carefully before installation.

Please Notice:

1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
3. Please power the mirror with plug to test all its functions before installing on the wall.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages 110V-120V. If the voltage exceeds 120V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.

Please check and make sure below functions work properly before installation ⓳

Product Functions

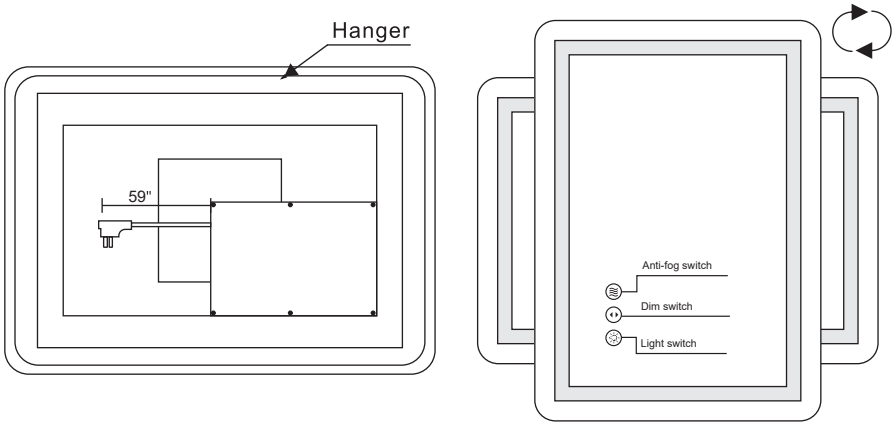

Horizontal/ Vertical Installation

Anti-fog switch:After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after it's turned on and close in 1 hour, so you can turn it on 10 minutes before taking a bath.

Dim switch: The led light supports 10% to 100% brightness adjustment, just long press the button. This button has memory function, the next time you open the mirror it will be in the same brightness it was in before it was last closed, which means that you don't have to touch the buttons each time.

Color temperature switch: The front and back lights all have three color temperatures that can be switch(3000K/4000K/6000K), just need to short press this button. And this button has a memory function as well.

Button Lighting Mode

State of Button Light	Meaning
White Light ON	Founction is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

Package Contents

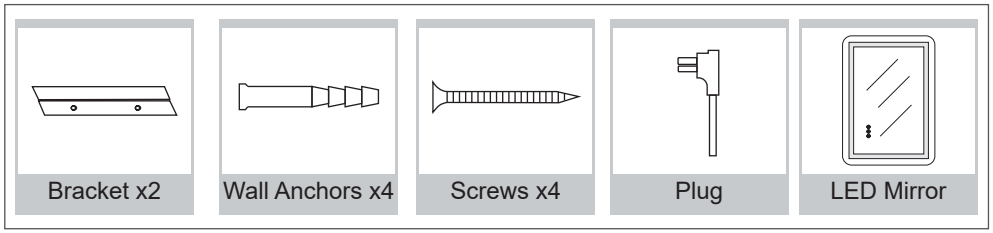

Installation tools you may need

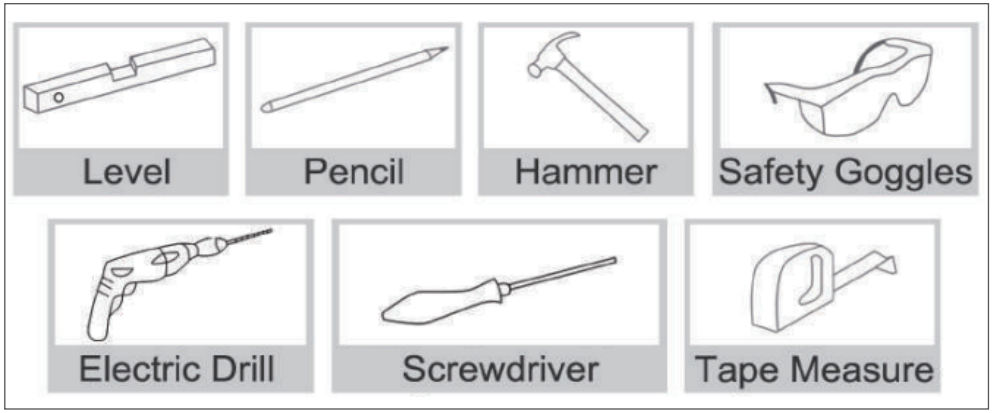

SIZE 1

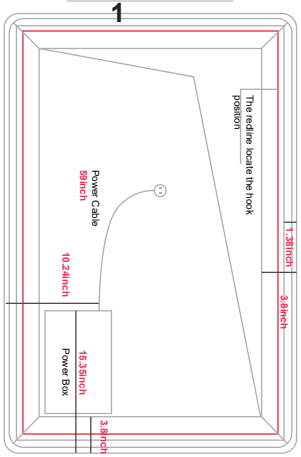

SIZE 2

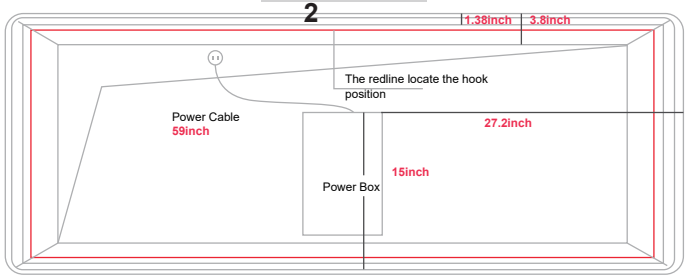

PS: The location of the button is located on the power box.

Product Specifications

Size	Thickness	Touch Button	LED Strip Mode	Color Temperature	Lumen	CRI	Life Span	Power (W)	Input Voltage(V)	Output Voltage(V)	Weight (LB)
28" X 20"	1.14"	3	2835 3 colors	3000k/4000k /6000k	2184	≥90 Ra	≥50000 hours	24	110V, 50/60HZ	24V	13.6
32" X 24"	1.14"	3	2835 3 colors	3000k/4000k /6000k	2704	≥90 Ra	≥50000 hours	24	110V, 50/60HZ	24V	17.4
36" X 24"	1.14"	3	2835 3 colors	3000k/4000k /6000k	2964	≥90 Ra	≥50000 hours	24	110V, 50/60HZ	24V	19
36" X 28"	1.14"	3	2835 3 colors	3000k/4000k /6000k	3744	≥90 Ra	≥50000 hours	24	110V, 50/60HZ	24V	20.3
36" X 30"	1.14"	3	2835 3 colors	3000k/4000k /6000k	3380	≥90 Ra	≥50000 hours	24	110V, 50/60HZ	24V	23.1
36" X 32"	1.14"	3	2835 3 colors	3000k/4000k /6000k	3484	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	24.3
36" X 36"	1.14"	3	2835 3 colors	3000k/4000k /6000k	3744	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	26.5
36" X 38"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4056	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	27.1
40" X 24"	1.14"	3	2835 3 colors	3000k/4000k /6000k	3224	≥90 Ra	≥50000 hours	24	110V, 50/60HZ	24V	18
40" X 30"	1.14"	3	2835 3 colors	3000k/4000k /6000k	3640	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	25.6
40" X 32"	1.14"	3	2835 3 colors	3000k/4000k /6000k	3744	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	26.5
40" X 36"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4004	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	29.7
48" X 30"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4160	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	32.6
48" X 32"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4264	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	36.2
48" X 36"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4576	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	33.9
48" X 40"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4784	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	42.3
55" X 30"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4628	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	33.2
55" X 36"	1.14"	3	2835 3 colors	3000k/4000k /6000k	5018	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	40.4
60" X 28"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4784	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	34
60" X 30"	1.14"	3	2835 3 colors	3000k/4000k /6000k	4995	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	43
60" X 36"	1.14"	3	2835 3 colors	3000k/4000k /6000k	5304	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	44.2
60" X 40"	1.14"	3	2835 3 colors	3000k/4000k /6000k	5564	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	50.5
72" X 32"	1.14"	3	2835 3 colors	3000k/4000k /6000k	5876	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	49
72" X 36"	1.14"	3	2835 3 colors	3000k/4000k /6000k	6136	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	50.1
72" X 40"	1.14"	3	2835 3 colors	3000k/4000k /6000k	6370	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	52.9

Product Specifications

Parameter	Specification
Switch	Touch Sensor Switch
LED Color Change	Yes
LED Dimming	Yes
Memory	Yes
Anti-fog	Yes
Waterproof	IP54
Safety Compliance	ETL
Glass Thickness	5 MM
Glass Material	Tempered Glass
Cable Length	1.5 M
Power Source	Hardwired / Plug in
Mounting Type	Wall Mounted
Mounting Method	French Cleat Mounting
Orientation	Horizontal / Vertical
Warranty	3-Year Manufacturer

Installation Instruction

Method 1: Plug in



Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.

Method 2: Hardwire

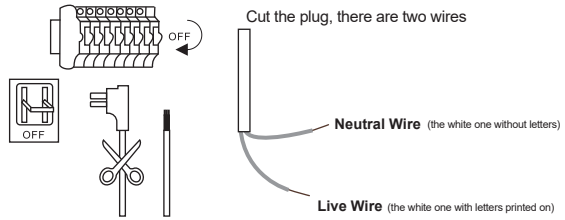

Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).

Step 1



Draw a straight line with a ruler to keep the mirror horizontal

Step 2



Use a electric drill to punch four holes at the marked spots.

Step 3

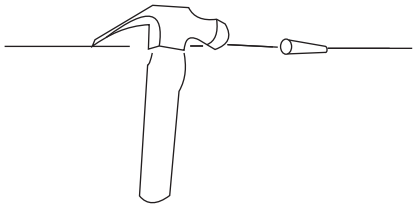

Apply wall anchors with hammer.

Step 4

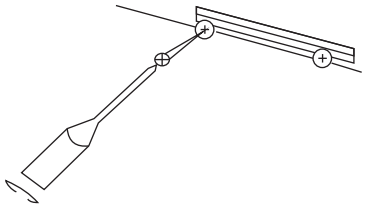

Use a screwdriver to screw the screws into the wall anchors.

Step 5



Hang the mirror on the wall

Step 6



Turn on the power.

Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the power box on the back of the mirror and test the power cables, tighten the cables if they are loose. (Please cut off the power firstly before testing the power supply and cables).
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.