
outline drawing:




model:

Technical data: Power supply voltage 110-120V, bulb type E12Max40Wx30PCS (not included)

CAUTION

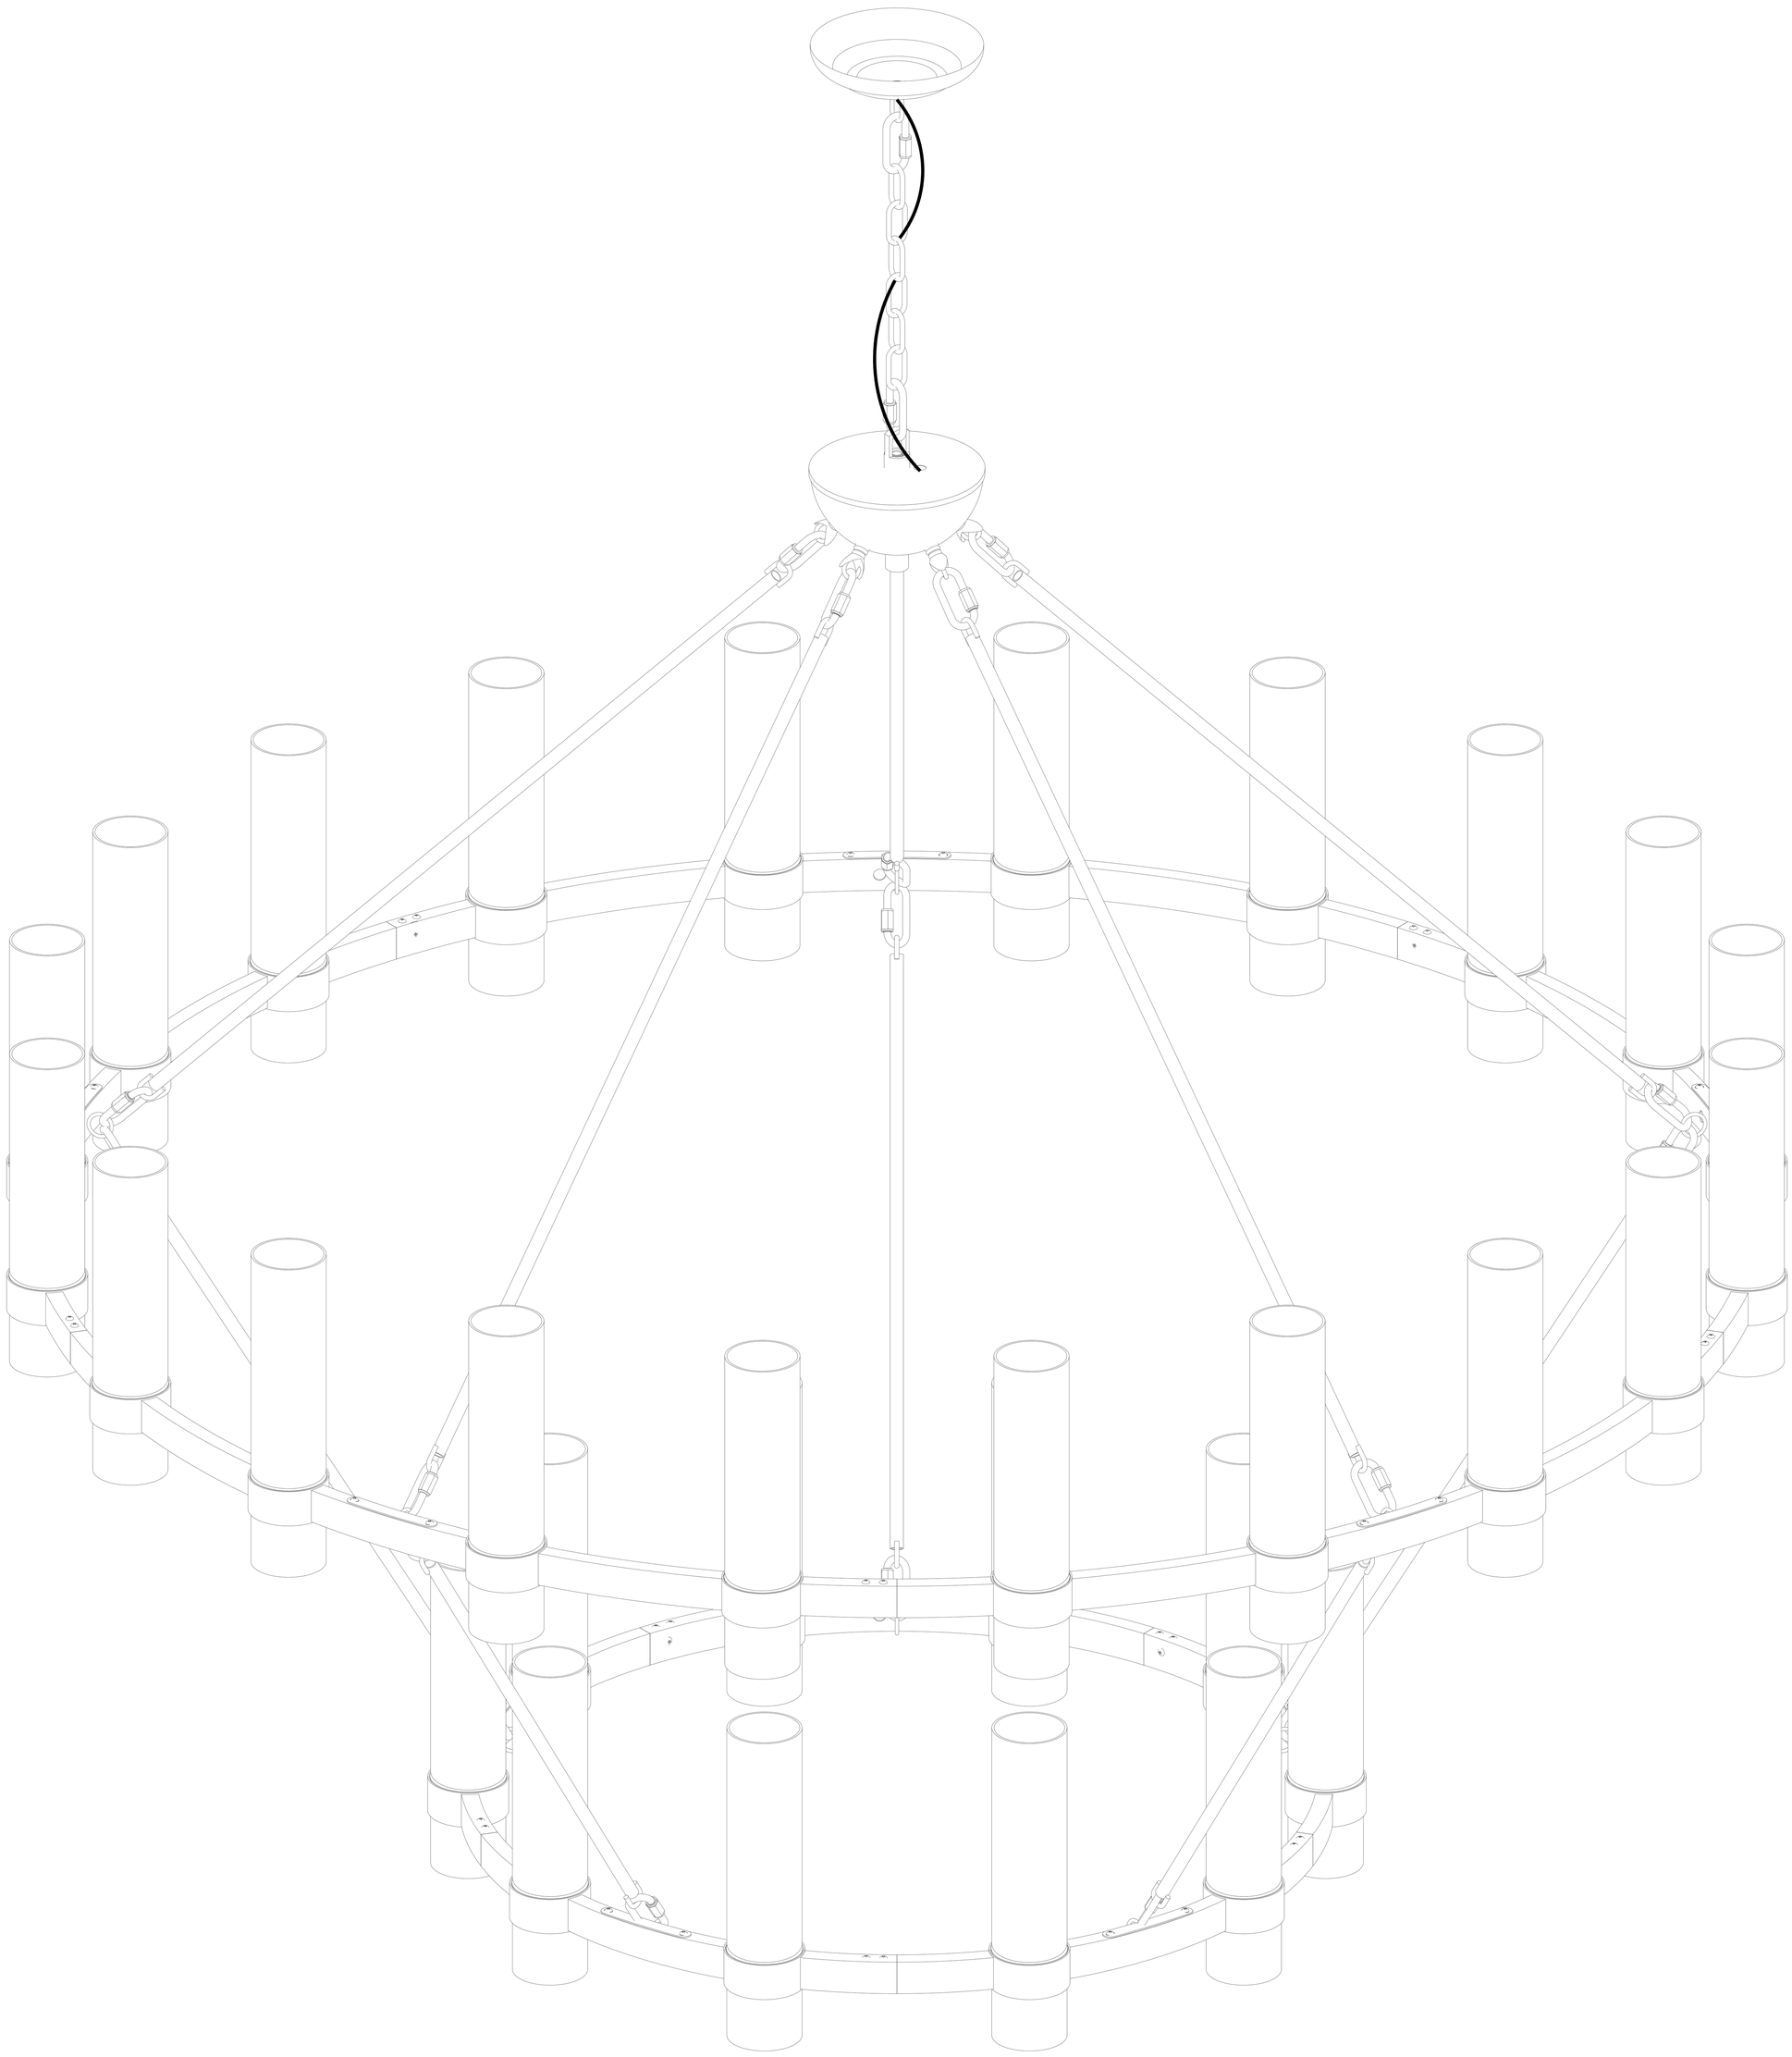


- Before installing the lighting fixtures, please check the insulation of the wires for any cuts, wear, or possible damage during transportation。If the wires are defective, do not attempt installation 。
- In some countries, electrical installation work can only be carried out by authorized electrical contractors。Please contact the local power department for advice。

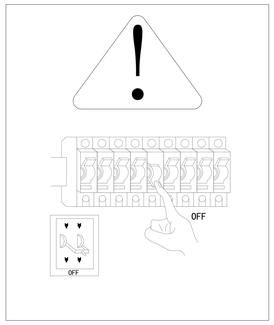


IMPORTANT Before starting the installation work, please make sure to cut off the power supply to the circuit。

IMPORTANT Keep children away from the installation process 。

Required tools (not included):



Ladder



Phillips screwdriver



pincers

Required tools (including):




expension screws




glove

The hardware kit provides:



sling chain

carabiner



Installation board



mounting screw



Hanging plate screws



ring



CONNECTORS




tray




Semi circular body




Long pull rod



Gecko rubber stopper




Self tapping screws



cable tie



Short pull rod

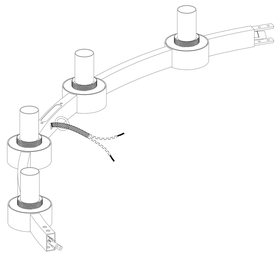

lamp body




Long glass-30PCS



Pingmu-30PCS


Short glass-30PCS



lamp body

- The components displayed on each lamp may vary slightly


Step 1

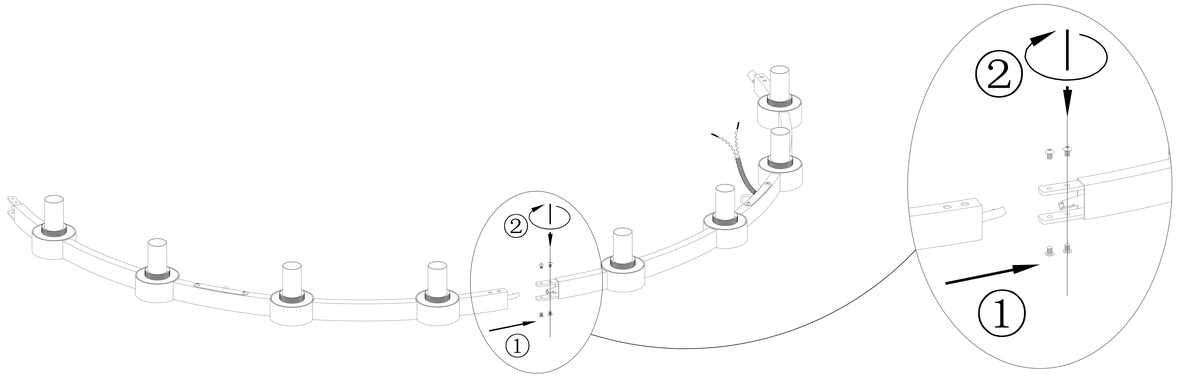

① Connect the cable connectors in series together。


② Connect all the rings together and use a Phillips screwdriver to tighten the screws at each connection point。

Step 2

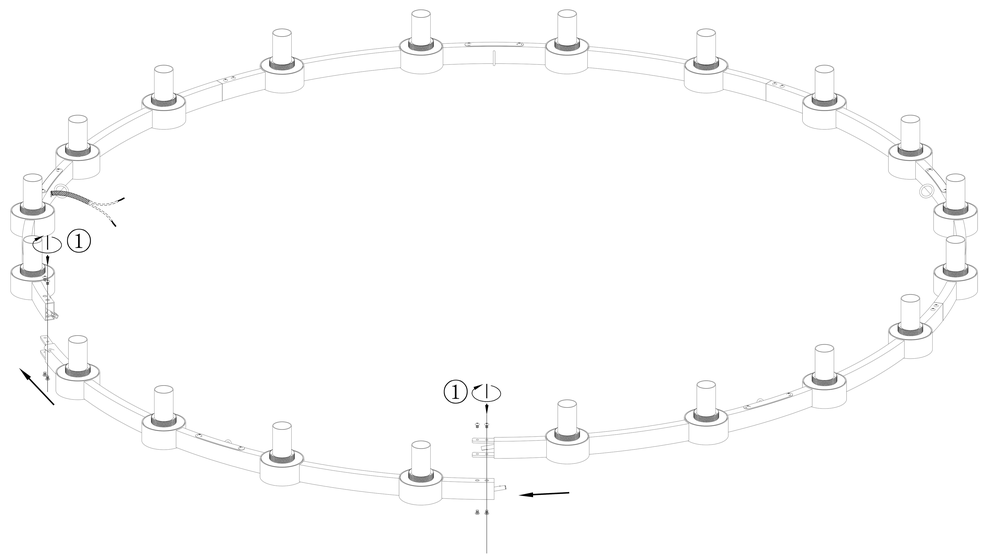


① This step refers to step 1 。

Step 3

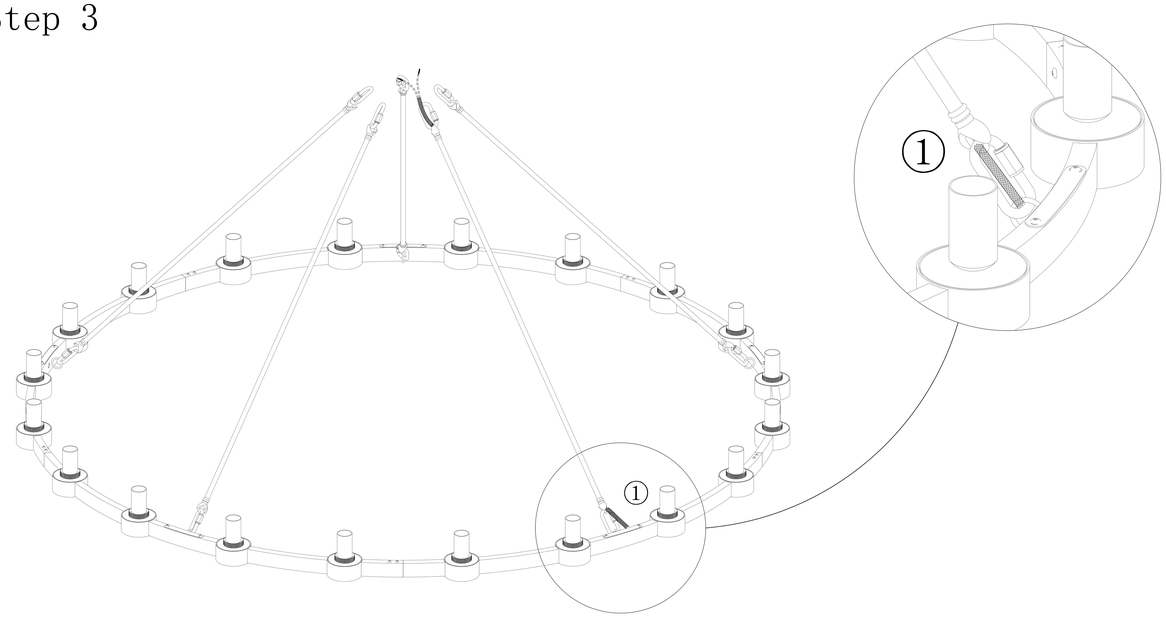

① Thread the wire through one of the pull rods and connect it to the ring with a snap ring。


Step 4

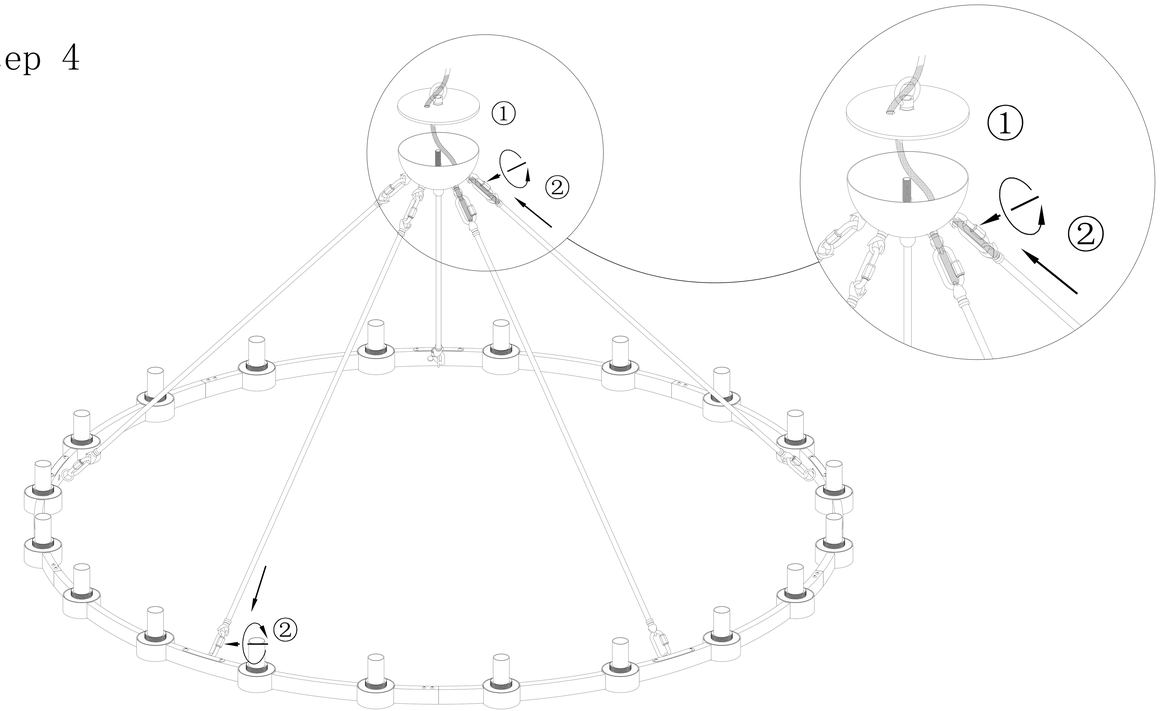

① Open the ancient lid and thread all the wires through the drum lid。


② Connect ancient, pull rods, and circular objects with mountain buckles。

Step 5

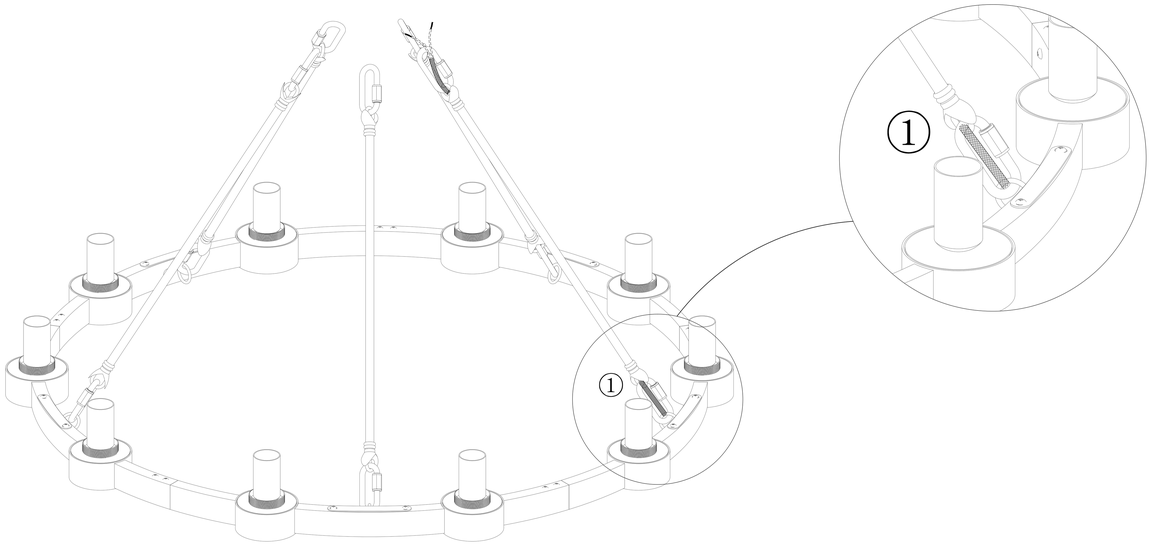


① Thread the wire through one of the pull rods and connect it to the ring with a snap ring。

Step 6

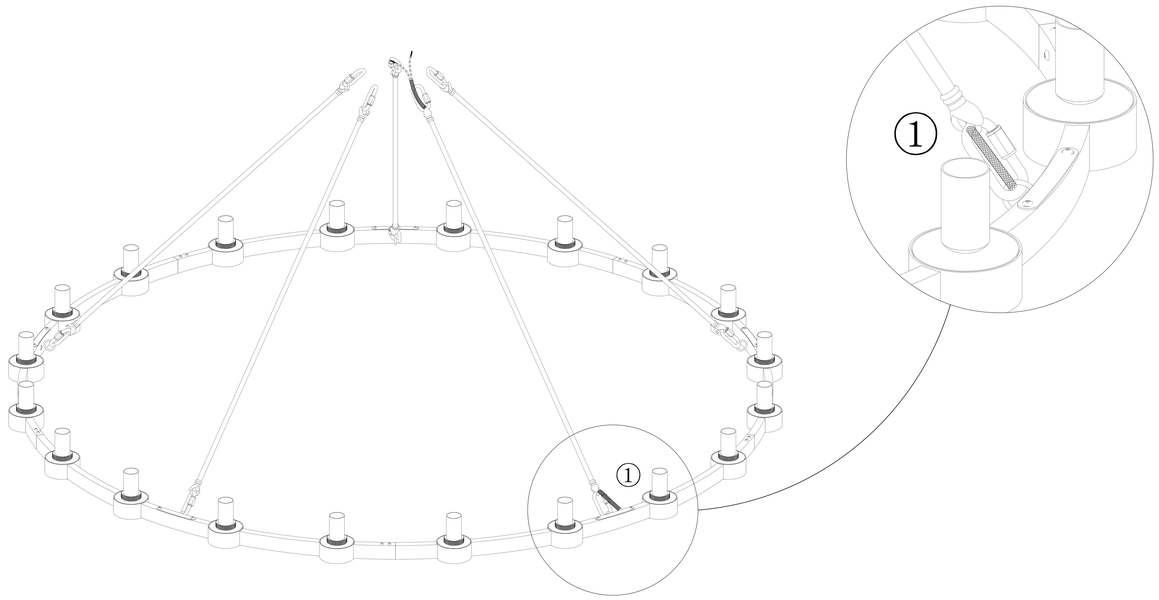

① Thread the wire through one of the pull rods and connect it to the ring with a snap ring。

Step 7

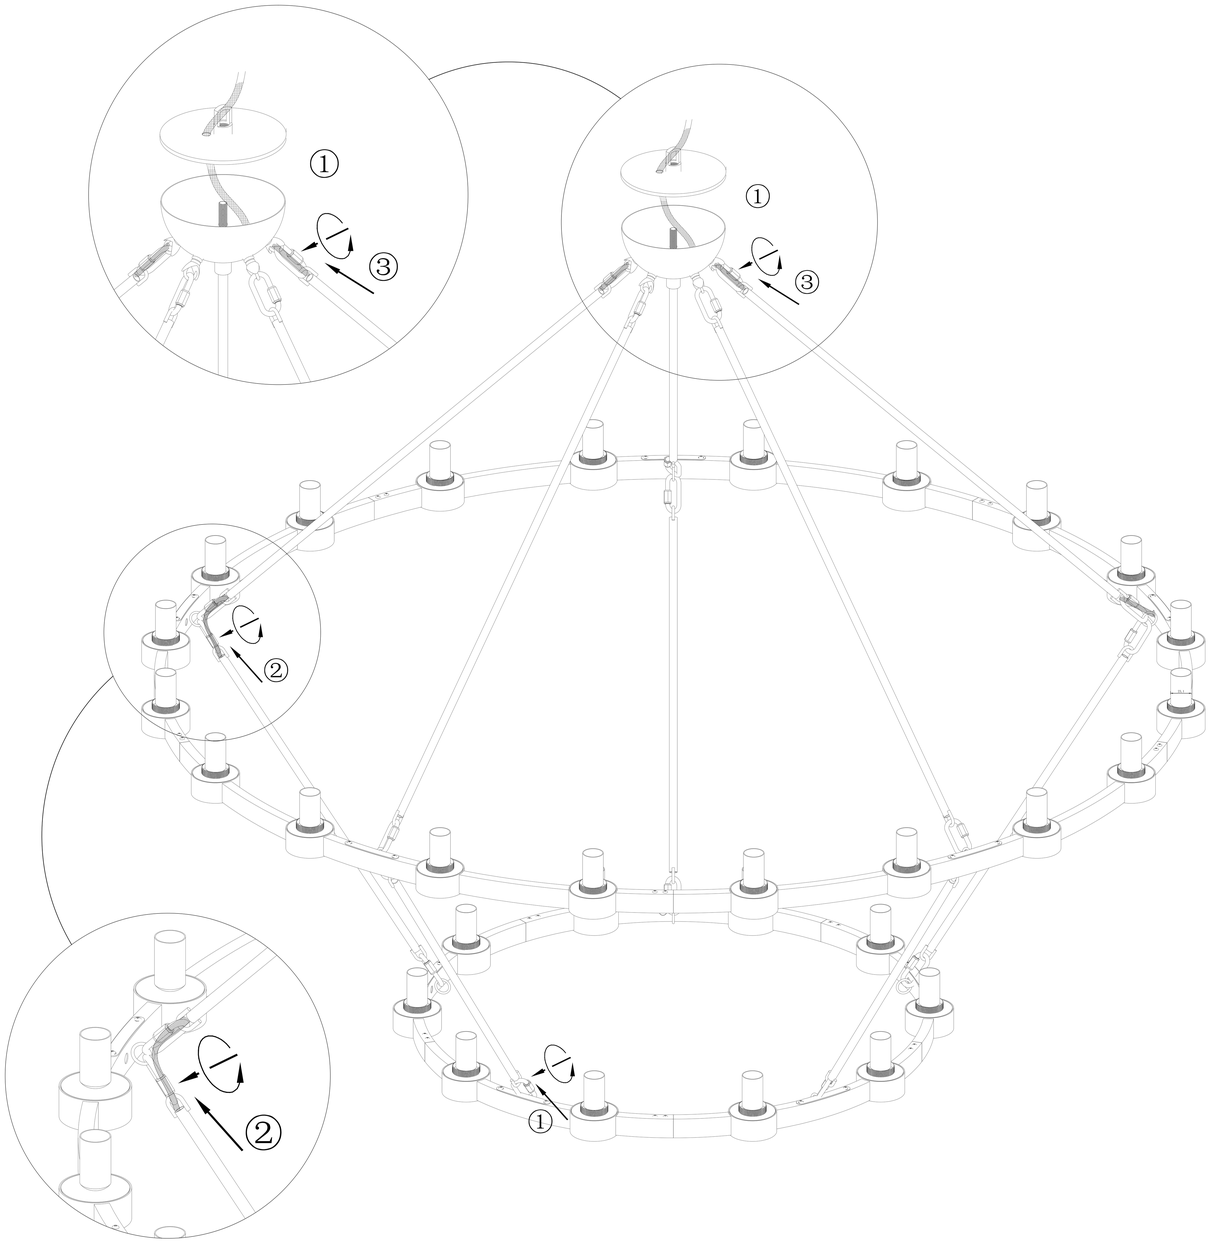


① Open the ancient lid and thread all the wires through the drum lid。

② Hang the short pull rod on the lower small circle onto the hardware ring of the large circle, and then thread the power cable through the long pull rod on top of the large circle。

③ Connect ancient, pull rods, and circular objects with mountain buckles。

Step 8

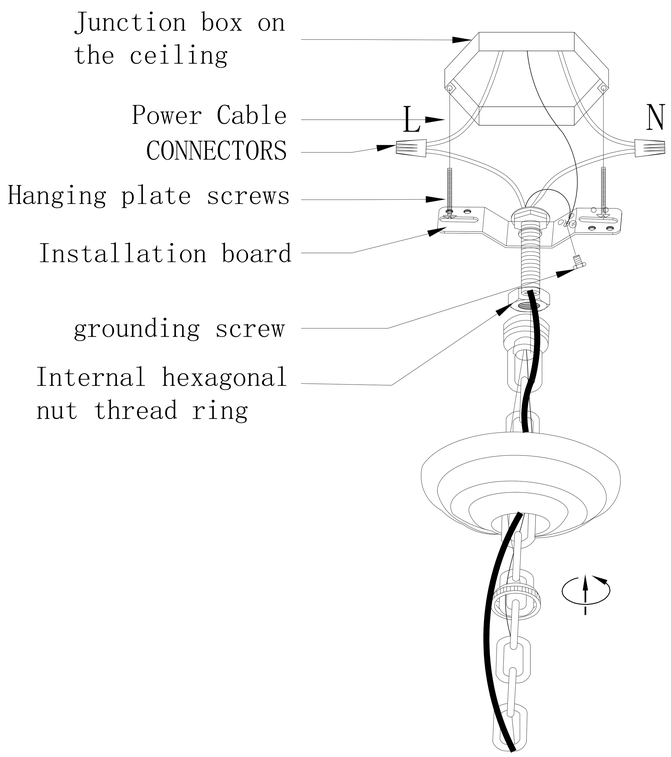

① Thread all the wires through the canopy and installation kit。

② Connect the power cable with two cable connectors。


③ Connect the grounding wire and tighten it with the grounding screw。

④ Install the fixing screws into the mounting plate, install the installation unit under the junction box, and tighten with two mounting screws。


⑤ Fix the canopy in place using a suspension ring. Tighten the screw ring and hex nut with a wrench to tighten the hex nut。

⑥ Tighten the fixing screws on the rain shelter holes。

⑦ Swivel the lid onto the canopy。

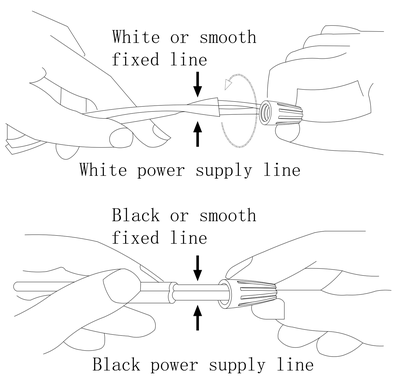


Connect the black or red wire (with an L sticker on the wire) to:	Connect the white wire (with N stickers on the wire) to:
black	white
Parallel lines - pti&l (circular and smooth)	Parallel lines - spri&l (square and ridge shaped)
Transparent, brown, gold or black (without tracer)	Transparent, brown, gold or black (with tracer)
Copper core insulated wire (excluding GREEN)	Silver conductor insulated wire (excluding GREEN)

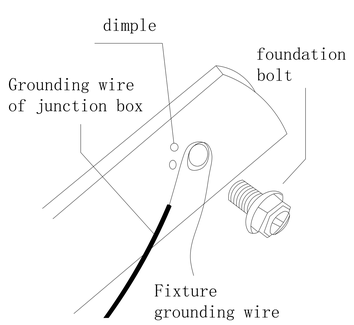

Step 9

Kind reminder:Before installing the lampshade, please clean it thoroughly 。

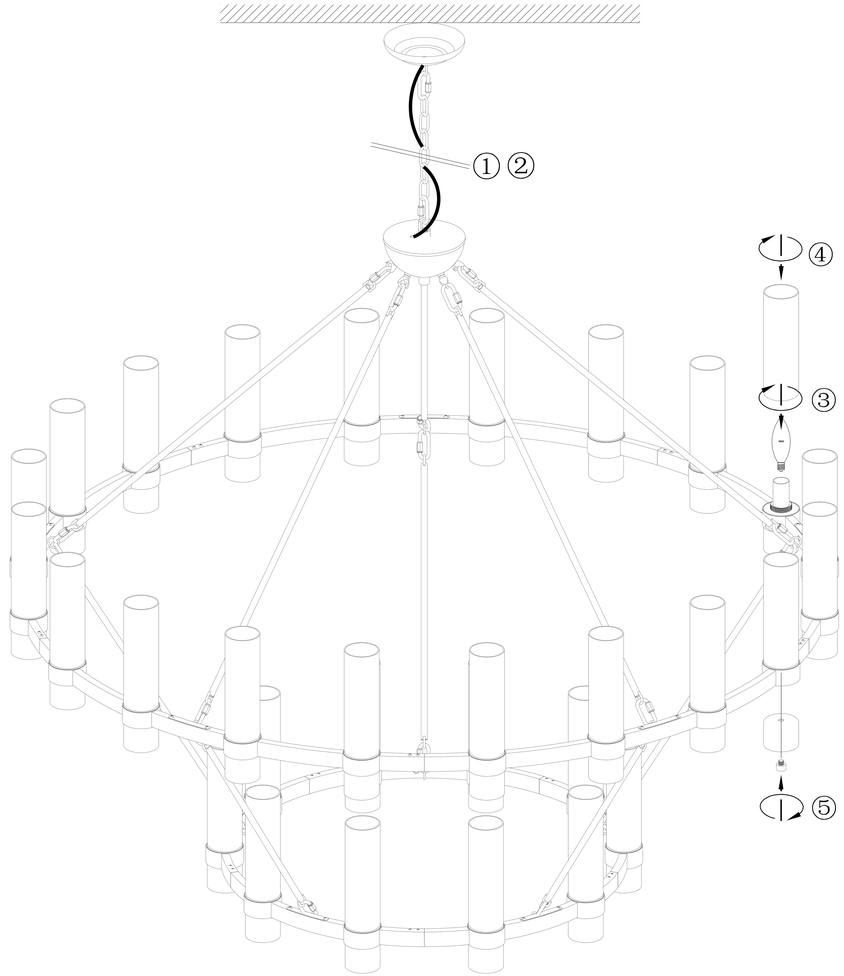

①② This depends on the height of your ceiling and the desired suspension length. You can measure the chain and adjust the locking buckle to achieve the desired chain length。

③ Tighten the light bulb (E12 maximum 40W, not included)。

④ Rotate the long glass lampshade onto the aluminum teeth on the lamp head。

⑤ Connect the flat mother through the middle hole of the short glass cover to the tooth hole on the lamp body and tighten it。