

# PENDANT LIGHT (CHAIN)

## Assembly Instructions



### CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

## TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers




Fixture



Shade



Chain




Canopy




Socket Ring




Screw Collar Ring



Mounting Unit



Mounting Screws



Wire Nuts


**\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

# PENDANT LIGHT (CHAIN)

## Assembly Instructions


### STEP 1

Secure the **shade** to the **fixture** using the **socket ring**. Attach the end of the **chain** to the loop on the **fixture**.

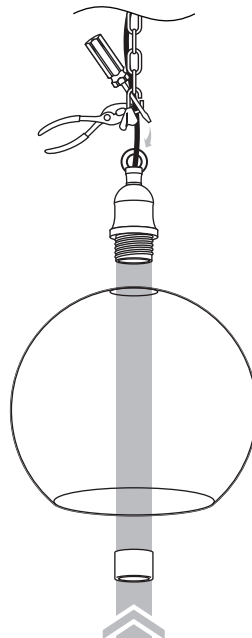


### STEP 2

Use the **mounting screws** to attach the **mounting unit** to the junction box

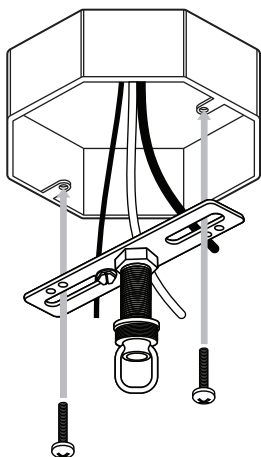

### STEP 3

Pass the **chain** and the branchwires through the **screw collar ring** and **canopy**. Feed the branchwires through the pipe nipple on the **mounting unit** and attach the end of the **chain** to the **mounting unit**.

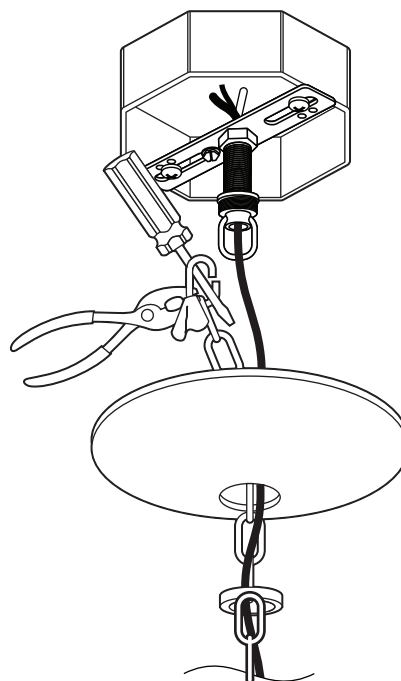

# PENDANT LIGHT (CHAIN)

## Assembly Instructions

### STEP 4



Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

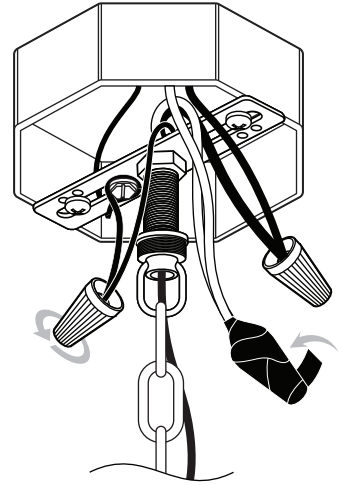

### STEP 5

Secure the **canopy** to the **mounting unit** with the **screw collar ring**.

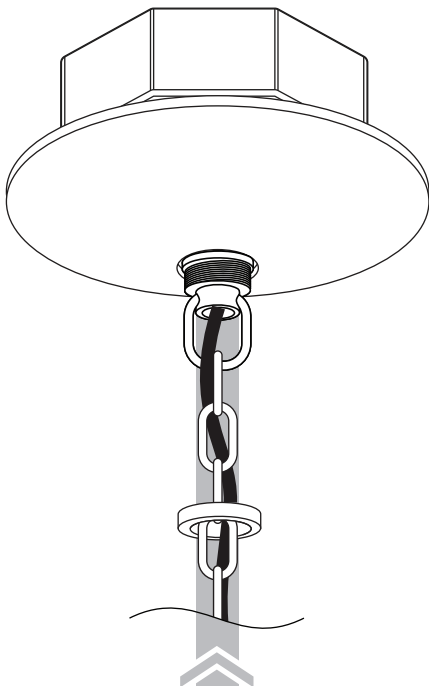

### STEP 6

Install bulb (not included)

