

San Raphael® Comfort Height®

one-piece elongated 1.0 gpf toilet K-3597

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.0 gallon per flush (gpf).
- Equipped with Sloan Flushmate® Pressure Vessel.
- Seat and lid included.

Technology

Pressure Lite® flushing technology provides commercial-grade flushing power while reducing water use.

Installation

- Standard 12-inch rough-in.
- Supply line not included.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon
- Eligible for consumer rebates in some municipalities.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

Recommended Products/Accessories

K-75796 Cachet® Nightlight Quiet-Close™ Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

Included Components

Additional Components: Bolt cap accessory pack Tank Accessory Pack Tank Cover

Toilet Seat





CSA B651 ADA

Codes/Standards ASME A112.19.2/CSA B45.1 EPA WaterSense® California Energy Commission (CEC) ADA CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	58	Thunder™ Grey
	7	Black Black™





San Raphael® Comfort Height®

one-piece elongated 1.0 gpf toilet **K-3597**

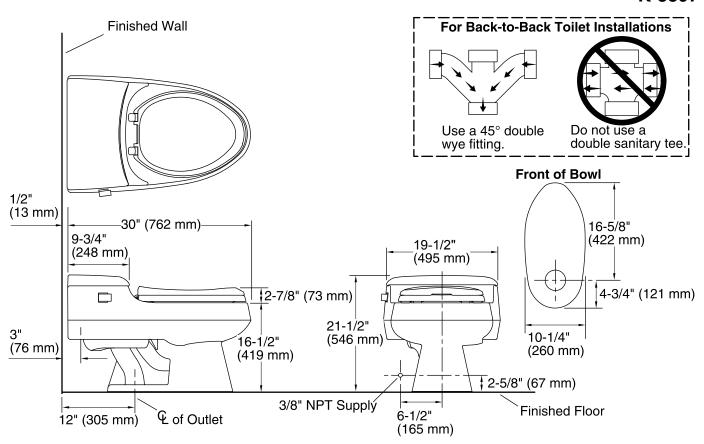

Technical Information

All product dimensions are nominal.

Toilet type: One-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1 gpf (3.8 lpf)

Water surface size: 9" x 7" (229 mm x 178 mm)

Rim to water surface: 5-7/8" (149 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

