



# Awaken® B90 | K-99248

Single-function handshower with Eco-Boost

## Features

- Eco-Boost increases the flow rate from 1.5 gal/min (5.7 l/min) to 2.0 gal/min (7.6 l/min) with the touch of a button
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Air-induction technology maximizes the air/water mix for a powerful, even flow
- 3-9/16" (90 mm) diameter sprayface
- Includes check valve for backflow prevention
- Earns Water Efficiency points in the LEED Green Building Rating System™ for 1.75 gal/min (6.6 l/min)



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |                        |
|----|------------------------|
| CP | Polished Chrome        |
| BN | Vibrant Brushed Nickel |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-10-2026 17:18 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*OBC compliant when installed to the specific requirements of these regulations.*



OBC

ASME A112.18.1/CSA B125.1  
EPA WaterSense®  
OBC

## Technical Information

*All product dimensions are nominal.*

### Flow Rate

Handshower Rated Maximum 2 gpm (7.6 l/min)

Flow:

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Required Products/Accessories

- K-8593 72" metal shower hose

or

- K-9514 60" metal shower hose

or

- K-45981 72" ribbon hose

or

- K-45982 60" ribbon hose


## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-10-2026 17:18 - US-CA

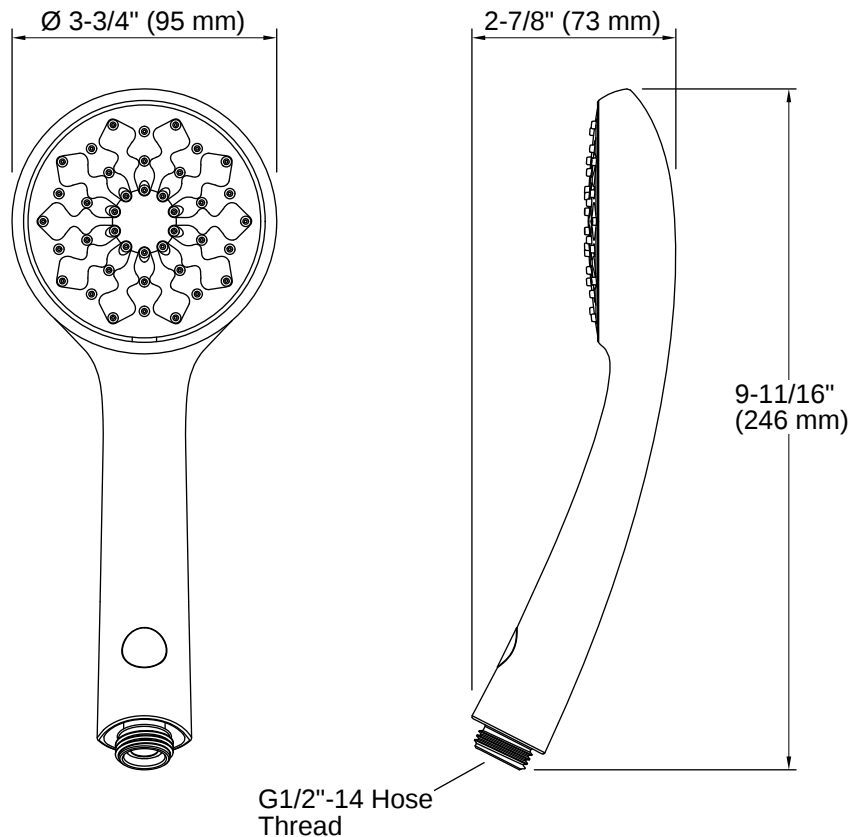

## Installation

- G 1/2 - 14 inlet connection

## Installation Notes

*Install this product according to the installation instructions.*

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

**NOTICE:** Choose an automatic compensating valve with the appropriate minimum flow rating to ensure your valve will provide safety at the lowest flow rates. For a handshower rated at 1.5 gal/min (5.7 l/min) maximum, use with an automatic compensating valve rated at 1.2 gal/min (4.5 l/min) or less.

OBC compliant when installed to the specific requirements of these regulations.

