

4" Round Ultimate Super Thin Recessed LED 13.5W



Type IC, Wet & Air-Tight

DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
Wider Trim - No Goof Rings Needed For Covering Old 4" Holes
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required
CRI 90 + for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 2"

DIMENSIONS : ID 4 1/8" OD 5 1/4" Cut Out 4 1/4" to 4 1/2"

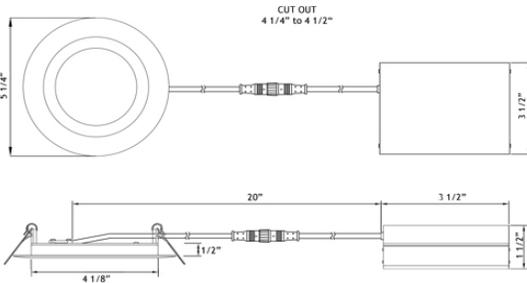

120V TRIAC Dimmable

Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



Order Separately as
Cat # LLL-LD1535T

ORDERING GUIDE

Example: **LL4R - 30K - WH**

	CCT	Trim Finish	
LL4R	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K	BN	Brushed Nickel
5000K	50K	BC	Brushed Copper
DTW 28-20	28K	Dim to Warm 2800K to 2000K WH Trim Only	
DTW 35-20	32K	Dim to Warm 3500K to 2000K WH Trim Only	

Project: _____

Location: _____


Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	13.5 W	
Colour Temperature	2700 3000 4000 5000 DTW 28-20 DTW 35-20	
Light Output	750 760 800 850 750 760	
Halogen Equivalent	75 W	
Beam Angle	110°	
CRI	90 +	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Power Factor	0.95	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus, Energy Star (except DTW), T24	
Warranty	10 Year on Residential	
	5 Year on Commercial Applications	

AVAILABLE TRIMS



ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat # **RIP412**



Flanged Rough-In Plate - cat # **FRP412**

COMPLIANCE



**Type IC
Air-Tight**