



LEFROY BROOKS

1 8 2 8 T R O U T M A N S T R E E T
R I D G E W O O D N E W Y O R K N Y 1 1 3 8 5 U S A
T : + 1 (7 1 8) 3 0 2 5 2 9 2 F : + 1 (7 1 8) 3 0 2 4 1 7 7

M2-4405



FLEETWOOD CROSS HANDLE THERMOSTATIC WITH LEVER FLOW CONTROL TRIM ONLY, TO SUIT M1-4201 ROUGH

DIMENSIONAL DATA SHEET

DATE: 28 AUG 2014

No: A66F284

COPYRIGHT © LBP LTD 2012. ALL RIGHTS RESERVED.

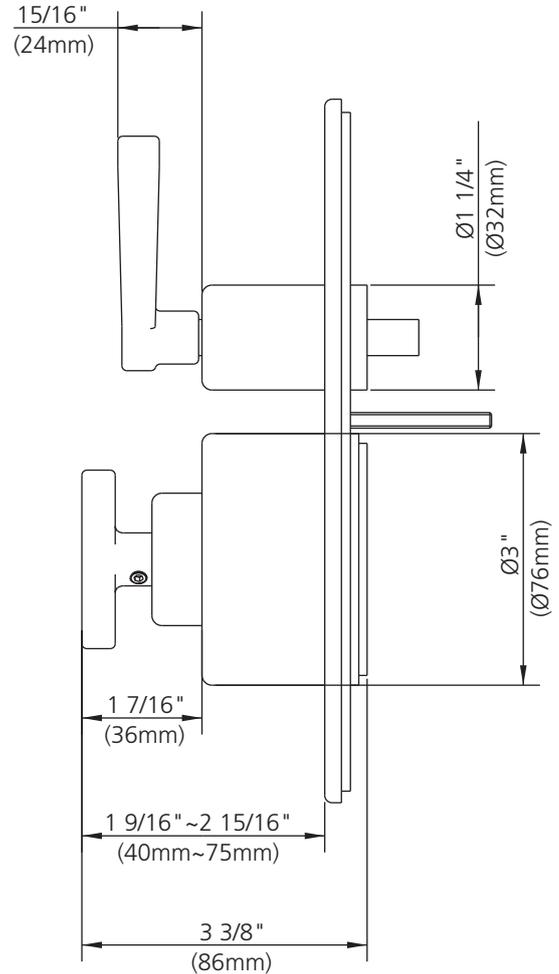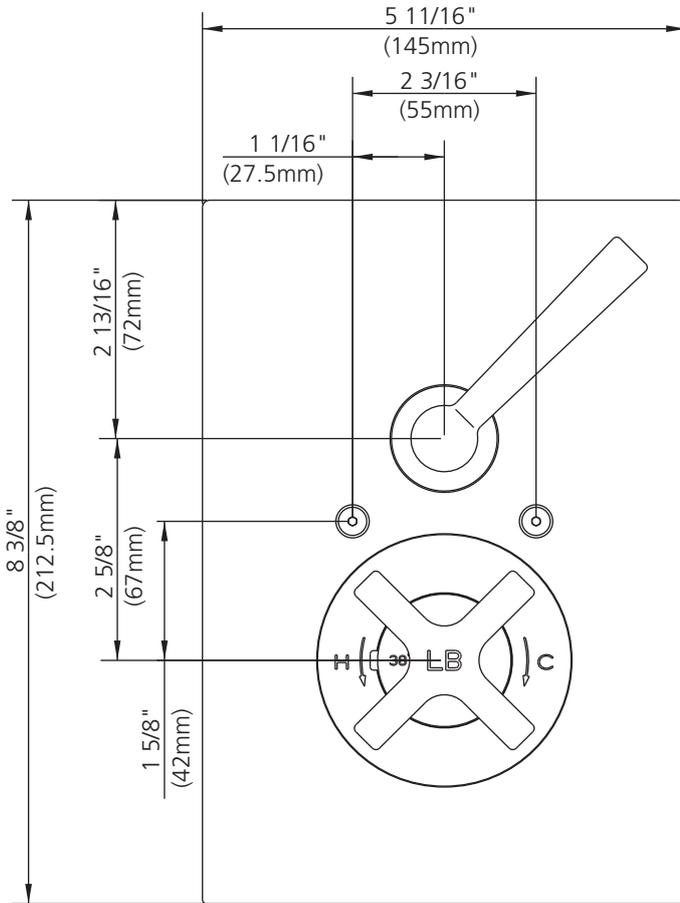


DIMENSIONS IN INCHES & MILLIMETRES

WHILST EVERY EFFORT IS MADE TO ENSURE THE ACCURACY OF THESE DATA SHEETS THEY ARE SUBJECT TO CHANGE WITHOUT NOTICE AS PART OF THE COMPANY'S PRODUCT DEVELOPMENT PROCESS

M2-4405

FLEETWOOD CROSS HANDLE THERMOSTATIC WITH LEVER FLOW CONTROL TRIM ONLY, TO SUIT M1-4201 ROUGH

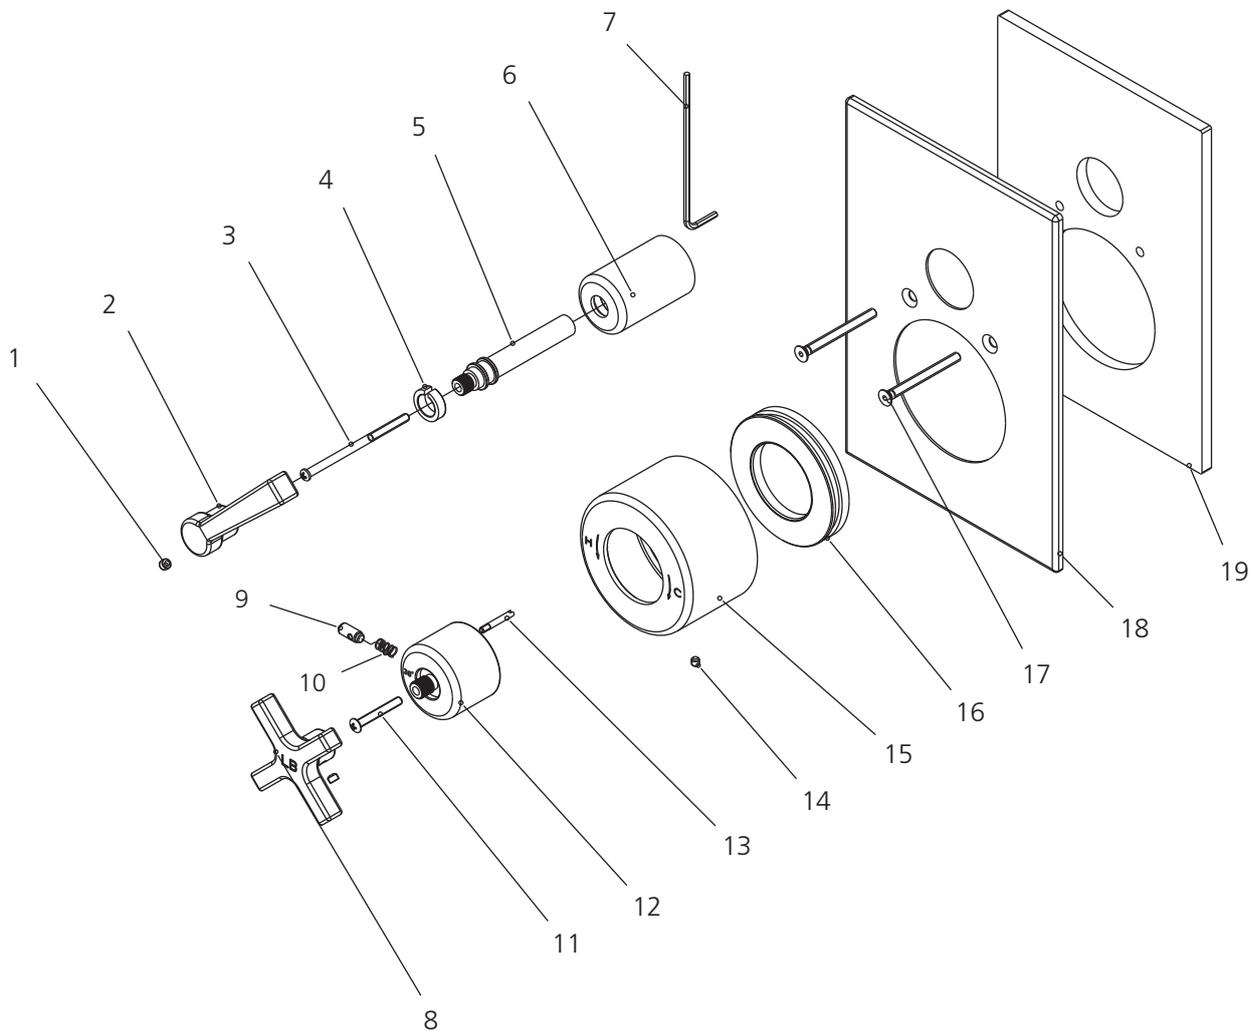

1	Set screw (292598)	8	Handle (029685-51)	15	Canopy (018959-52)
2	Handle (029686)	9	Limit button (036272)	16	Adjusting ring (104295)
3	Screw (008196)	10	Spring (005157)	17	Screw (008186)
4	Clip (012242)	11	Screw (008994)	18	Front plate (006142)
5	Stem extension (110386)	12	Adaptor (067960-50)	19	Spacer (013118)
6	Canopy (018960)	13	Pin (003147)		
7	Allen key (031220)	14	Set screw (065086)		

Standards

IAPMO/cUPC Listed
Meets A112.18.1

Please note :
Final achievable flow rate is dependent on the outlets fitted, see relevant outlets (spouts, roses, sprays) for fully assembled product flow rate.