
12X14 FT ALUMINUM DOUBLE ROOF GAZEBO



The gazebo comes with 4 boxes. Some times they may be delivered on the different day, please wait 2-3 more days or contact us for help.

Any questions on assembly or parts, please contact:customer01service@hotmail.com

Safety Information

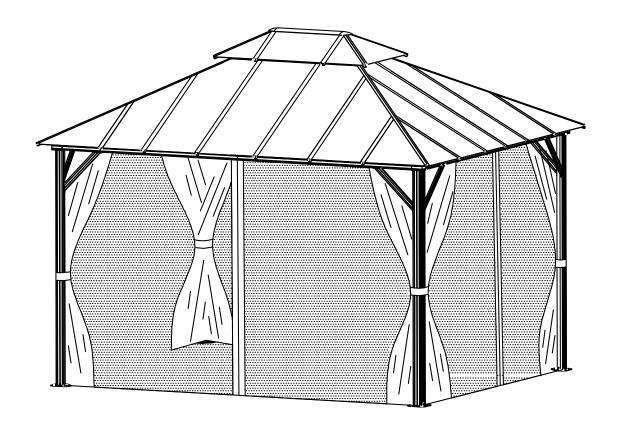

WARNING: Keep all flame and heat sources away from this tent fabric. This tent is made with fabric that meets CPAI-84 specifications for fl ame resistance. It is not fireproof. The fabric will burn if left in continuous contact with any flame source. The application of any foreign substance to the tent fabric may render the flame-resistance properties ineffective.



WARNING: When assembling and using this product, basic safety precautions must always be followed to reduce the risk of personal injury and damage to the product or surroundings.



WARNING: This gazebo is NOT a permanent structure and is designed for sunshade and privacy only.

The gazebo should only be used in ideal weather conditions. You MUST completely disassemble the gazebo prior to any extreme weather such as heavy thunderstorms, hurricanes or ice/hail storms. Failure to do so may result in structural or property damage.



CAUTION: Always install the gazebo on the level ground utilizing the ground stakes provided for stability. It is not recommended to permanently anchor this gazebo to a hard surface such as a wood deck or concrete floor.



CAUTION: Gazebo roof is weather-resistant but may leak during precipitation. It is recommended to remove the roof boards if expecting ice or hail storms.



CAUTION: Keep all children and pets away from the assembly area.


Begin assembly not less than 6 feet from any obstruction such as fence, garage, house, overhanging branches, clothes line or electrical wires. Some parts may contain sharp edges, wear protective gloves if necessary.

Care Instructions


Before using, wipe with a clean, dry cloth. Do not use bleach or solvents. Treat the frame with liquid wax for maximum protection against UV light and salty, damp air. Clean the roof panels periodically with a mild soap and water. Do not use harsh chemical cleaners as this will damage the panel finish. Please properly tighten all hardware and perform periodic inspections during usage for cracked welds or loose nuts or bolts.

ATTENTION:

- 1. Please fix all the screws first, do not lock off, after assemblling is fully completed, lock all at once finally.
- 2. Please check the manual carefully and make sure you have received all the parts.
- 3. If there is any missing, please let us know the letter of the parts you need.
- 4. If there is any damage, please send clear photos to us, we will check and offer you best solution soon.



Part List (BOX A)

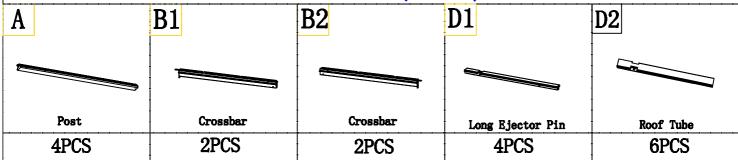


Part List (BOX B)

B3	B4	С	D3	E1
Crossbar	Crossbar	Brace	Short Ejector Pin	Roof Tube
2PCS	2PCS	8PCS	4PCS	4PCS
E2	E3	E4	F	G
Roof Tube	Roof Tube	Roof Tube	Roof Tube	Roof Tube
4PCS	4PCS	4PCS	4PCS	4PCS

I1	12	I 3	J	K
			307	
Roof Edge	Roof Edge	Roof Edge	Base Flange	Connector
2PCS	4PCS	28PCS	4PCS	4PCS
L	M	N1	N2	0
		***	***	<u> </u>
Bracket	Corner Moulding	Lower Connector	Upper Connector	Bracket
22PCS	4PCS	1PC	1PC	8PCS
P	Q	R	S	U
		*>		
Roof Cap	Roof Spacer Bracket	Hook	Roof Spacer Bracket	Corner Roof Bracket
· 1PC	2PCS	2PCS	8PCS	8PCS
V	W	X	Y	Z
	6		// // // // //	
Side Roof Bracket	Hook	Hook Stopper	Curtain	Mosquito Net
26PCS	104PCS	8PCS	1PC	1PC

#1	#2	#3	#4	#5
		•		©
M6x15 Bolt	M6x30 Bolt+Nut	M4x10 Self Tapping Screw	M6x20 Bolt+Nut	M6 Nut
114PCS	42PCS	8PCS	34PCS	12PCS

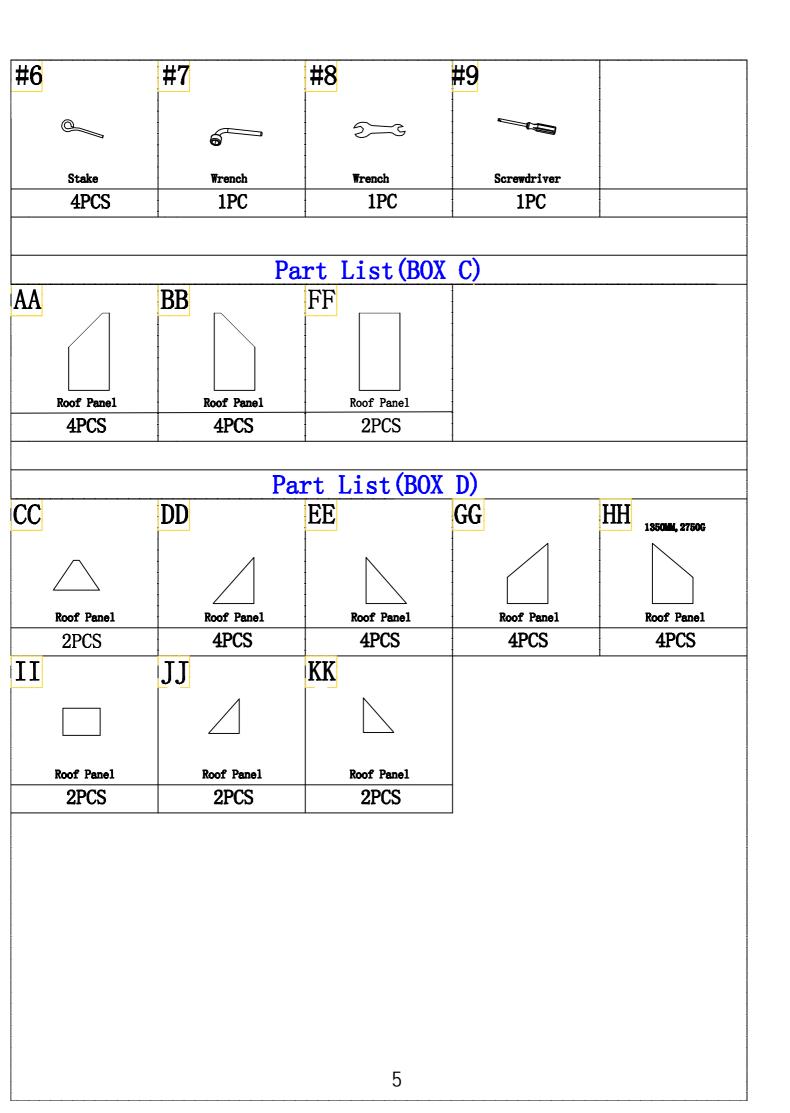

Assembly Step STEP 1 A*4 J*****4 #1*12 #5*12

Install a base flange(J) to the bottom of a post(A) using bolts(#1) and nuts(#5). Repeat the step for all other A posts.

STEP 2


B3*2

B4*2


K*2

L*10

#1*18

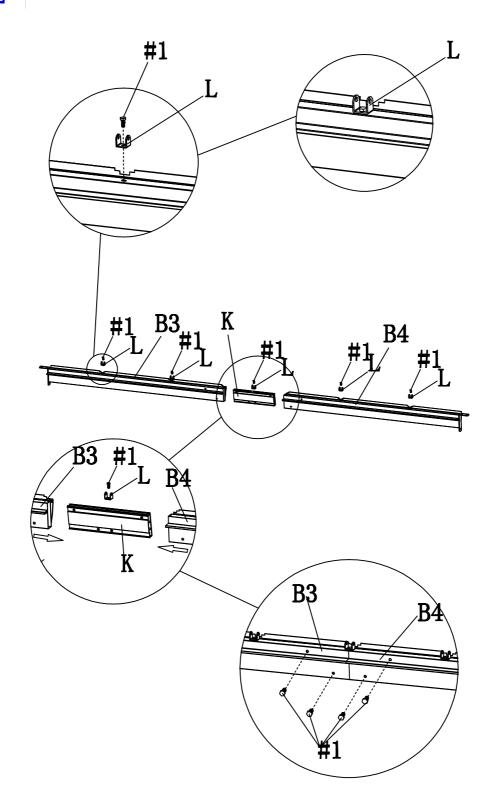

Join crossbars(B3) and (B4) by using connector(K), bracket(L), and bolts(#1). Take care to fix at middle point a bracket(L) using a bolt(#1). Repeat the step for all other (B3) crossbars.

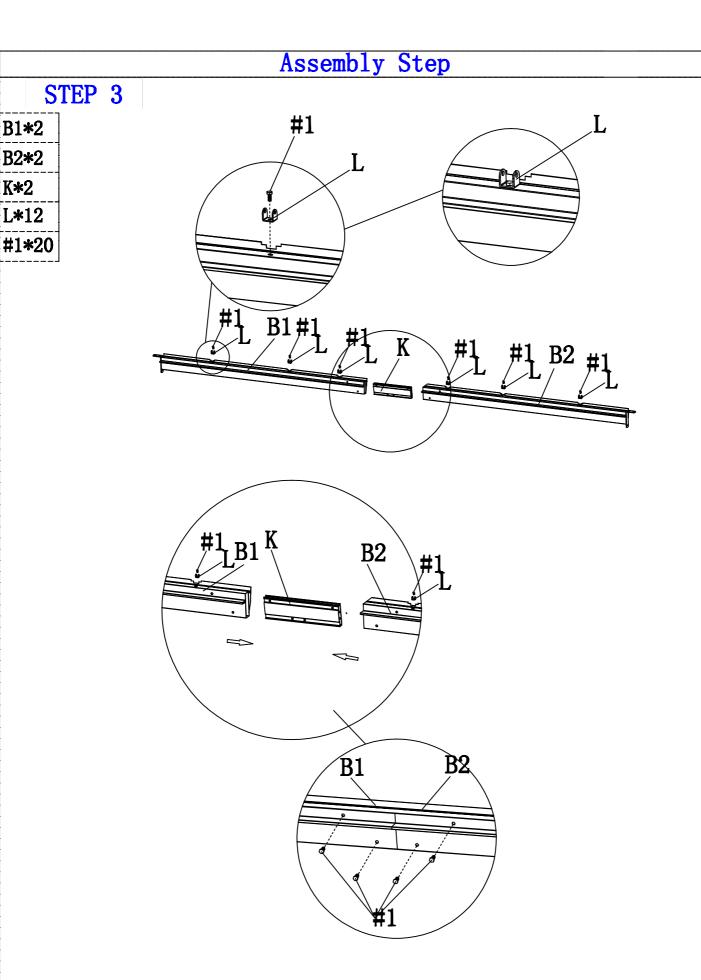

B1*2

B2*2

K*2

L*12

Join crossbars(B1) and (B2) by the use of connector(K), bracket(L), and bolts(#1). Take care to fix at middle point a bracket(L) using a bolt(#1). Repeat the step for all other (B1) crossbars.


Assembly Step STEP 4 #1*24 **B4 B**1 **B3** B2 **B2 B**3 **B**1 **B**4

As shown, fix the crossbars assembly (B1)/(B2) and (B3)/(B4) to posts (A) by using bolts (#1).


STEP 5

C*8


#1*16

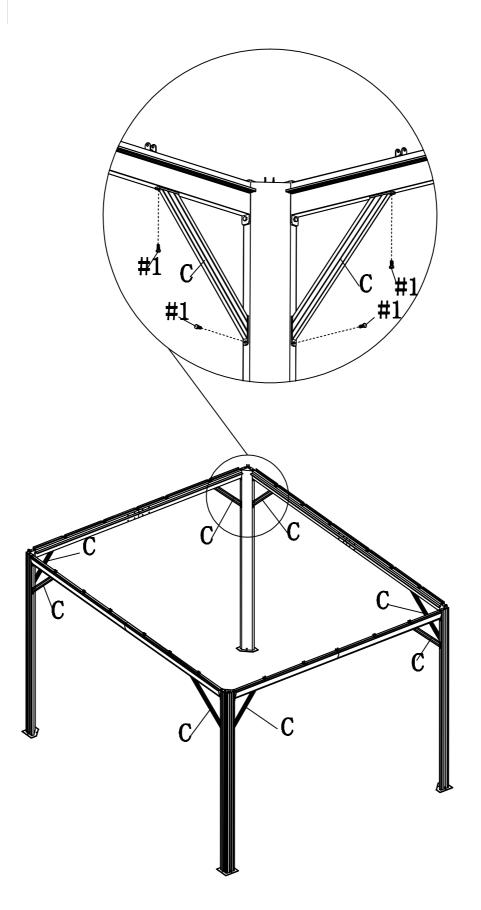

As shown, fix the braces (C) to posts (A) and crossbars assembly (B1)/(B2) and (B3)/(B4) by using bolts (#1).

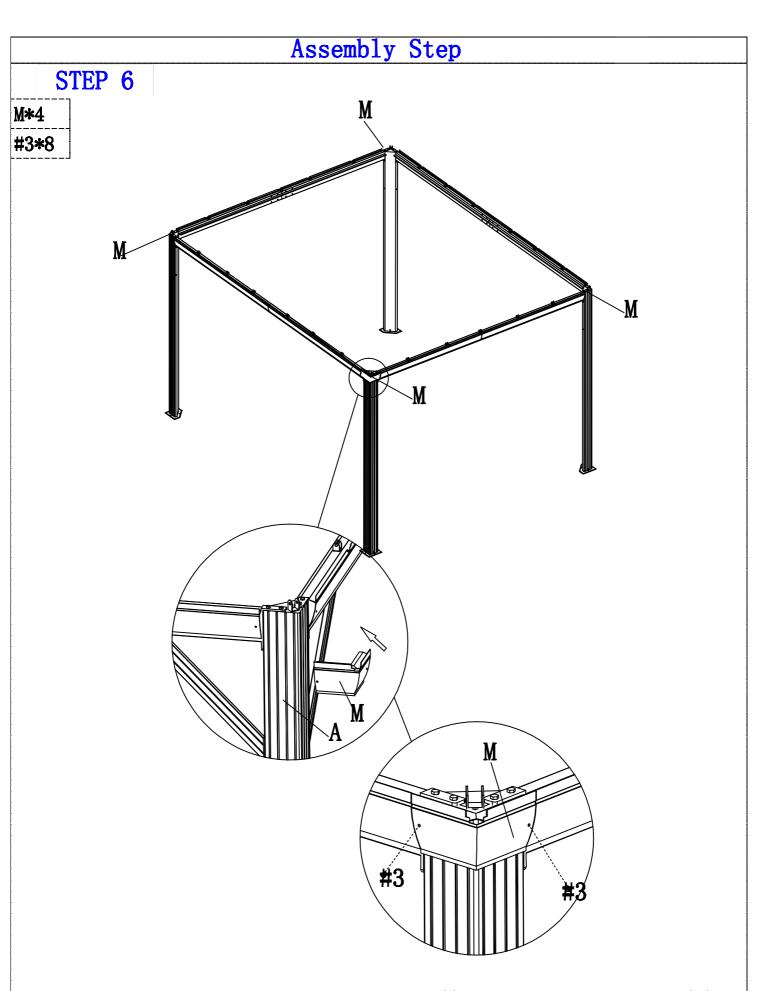

As shown, fix at appropriate location corner moulding (M) by using self tapping screws (#3).

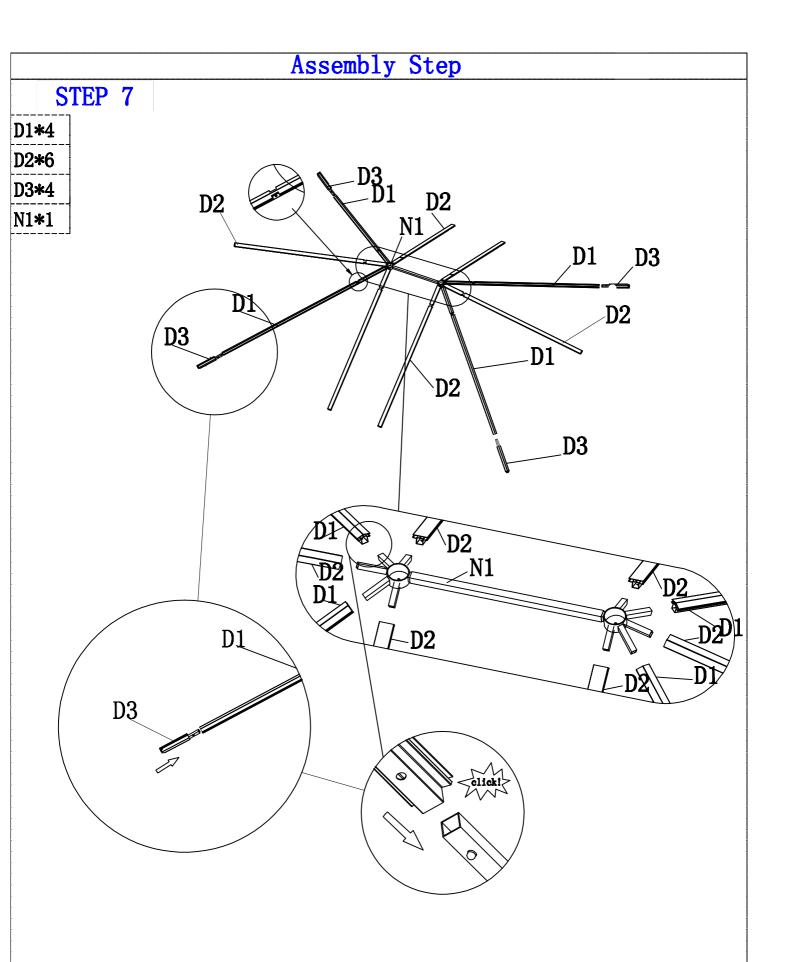


Repeat same procedure to fix corner roof tubes (D1) and roof tubes (D2) as shown.

Repeat same procedure to fix corner roof tubes (D1)

and roof tubes (D3) with connecting as shown.

STEP 8

#2*10

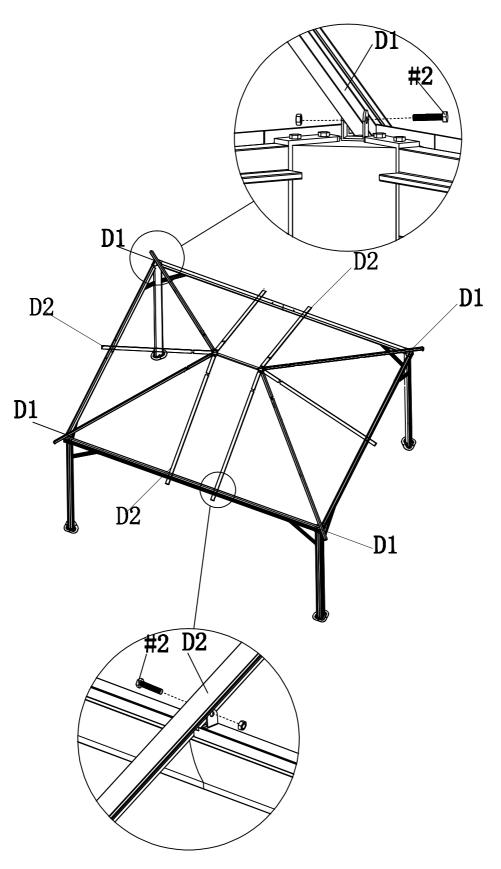

Lay down the last assembly on the gazebo main frame and fix tubes ends by using bolts and nuts (#2).

STEP 9

E1*4

E2*4


E3*4

E4*4

0*8

#1*24

#2*16

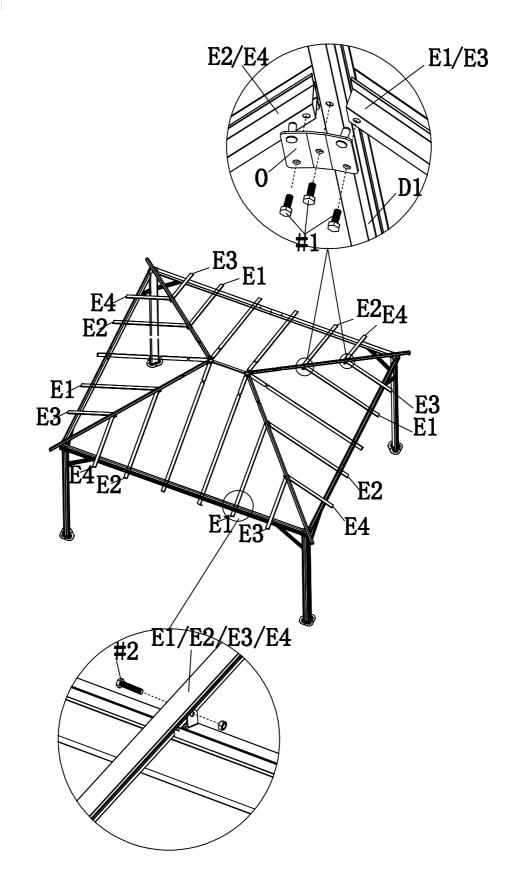


Fix the roof tube (E1), (E2), (E3) and (E4) to corner roof tubes (D1) by using brackets (0) and bolts (#1) as shown. Fix other ends of tubes to the main frame by using bolts and nuts (#2).

STEP 10


F*4

G*****4

N2*1

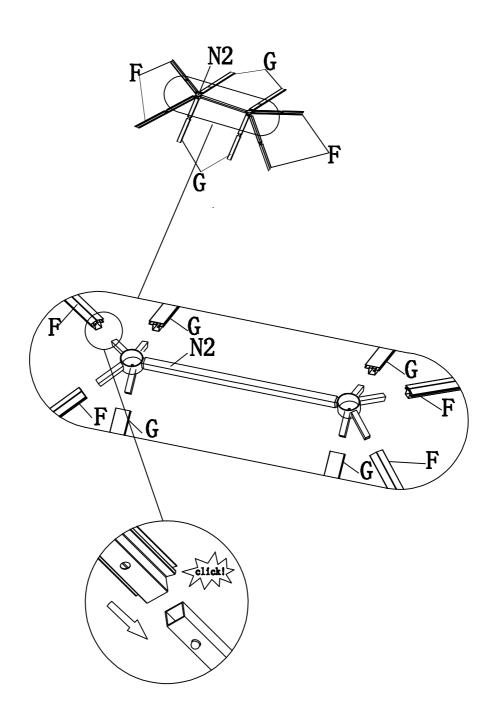


Repeat same procedure to fix roof tubes (F) and (G) as shown.

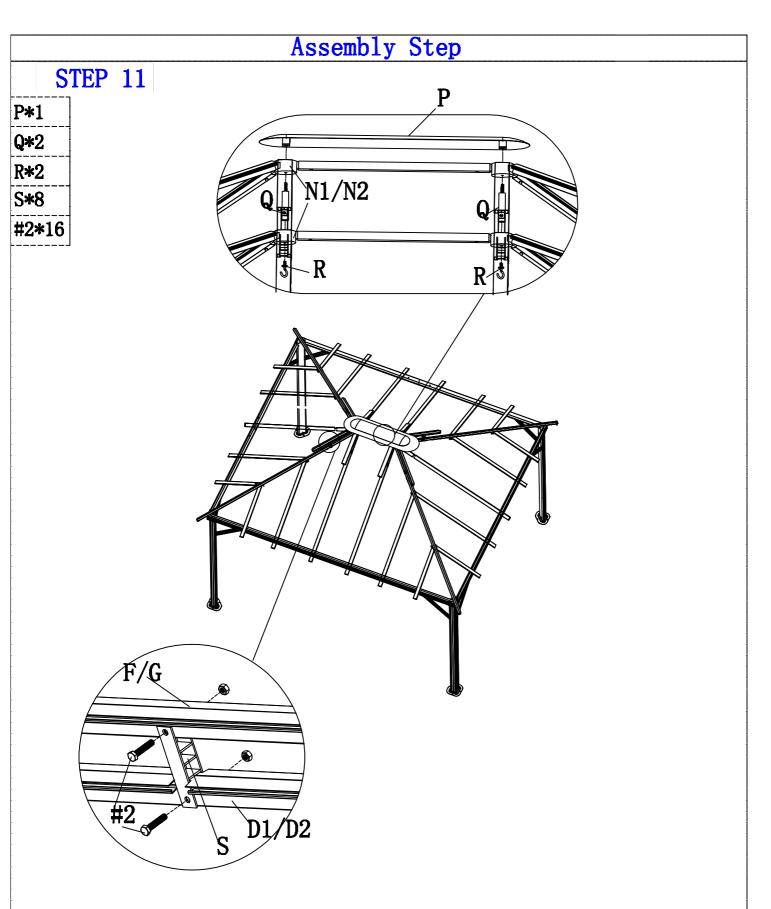


Fix the roof spacer (Q) under this last assembly by covering and screwing the roof cap (P) on. Lay down this assembly over the first central connector (N1/N2) fitted with (D1/D2) corner roof tubes. Fix by using the hook (R) as shown.

Fix other ends of the roof tubes (F) and (G) to the roof corner tubes (D1) and other tubes (D2) by using the roof spacer brackets (S) and bolts and nuts (#2).

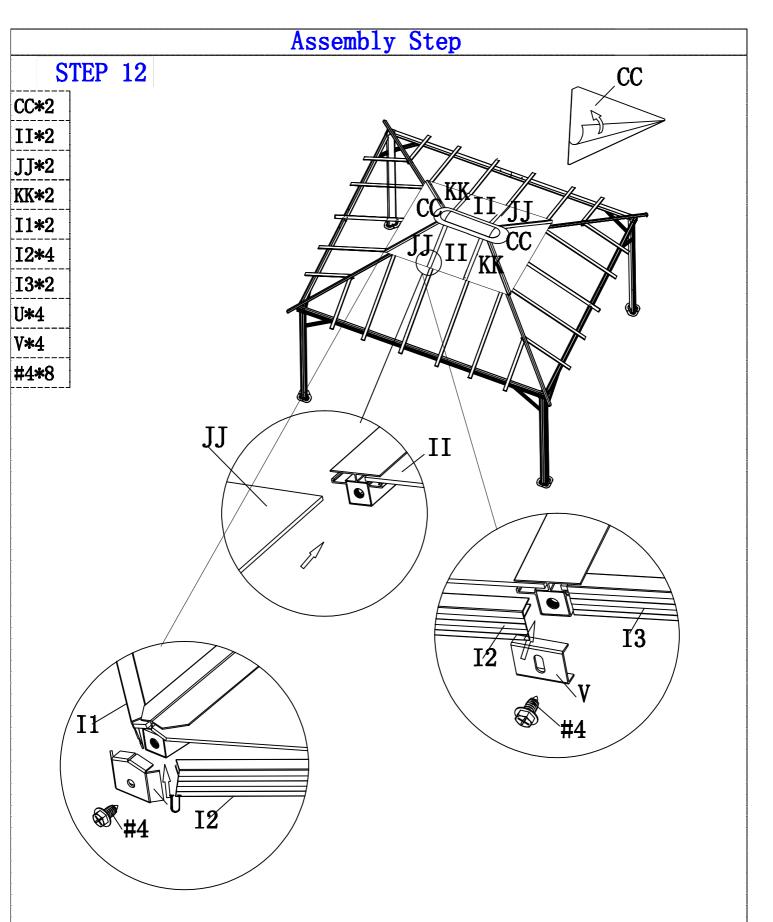

Insert roof panels (CC), (II), (JJ) and (KK) into the groove of roof tubes (F) and (G). As illustrated, insert roof edges (I1), (I2) and (I3) at the ends of roof panels of the small roof. As illustrated fix the roof corner brackets (U) and side roof brackets (V) by using (#4) bolts. In order not to damage inserts, do not over tighten the bolts.

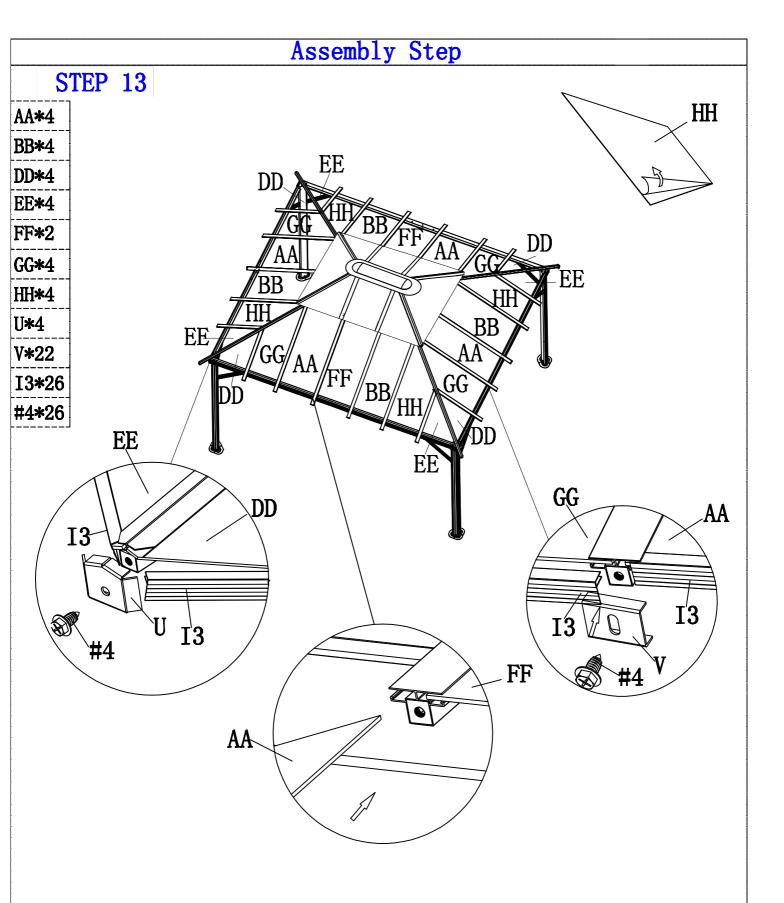

Insert roof panels (AA), (BB), (DD), (EE), (FF), (GG) and (HH) into the groove of roof tubes as shown.


As shown, insert roof edges (I3) at ends of roof panels.

Secure roof panels by using corner roof brackets (U) and side roof brackets (V) with bolts (#4).

In orden not to damage inserts, do not over tighten the bolts.

STEP 14

W*52 Y*1

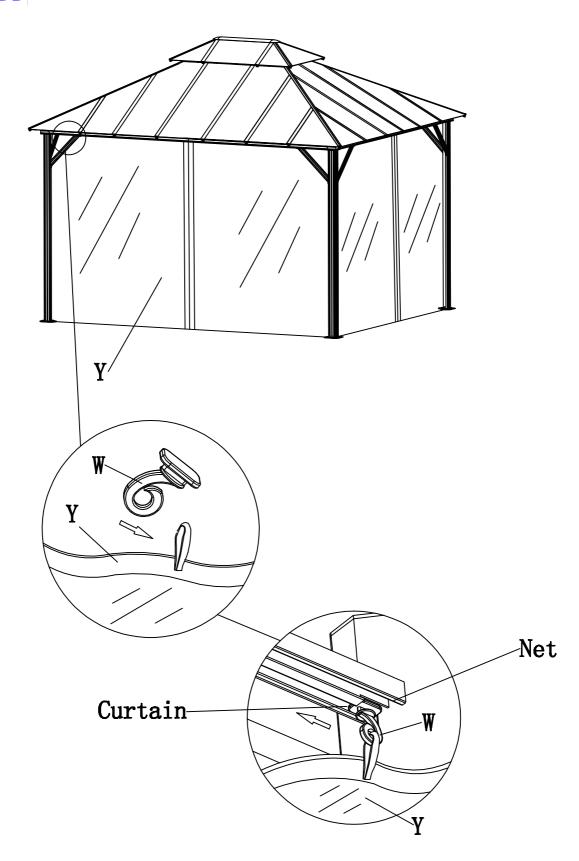


Hang up the curtain hooks (W) into the loops of the curtain (Y) and slide these hooks into the external rail of the (B1)/(B2) and (B3)/(B4) crossbars.

STEP 15

W*****52


Z*1

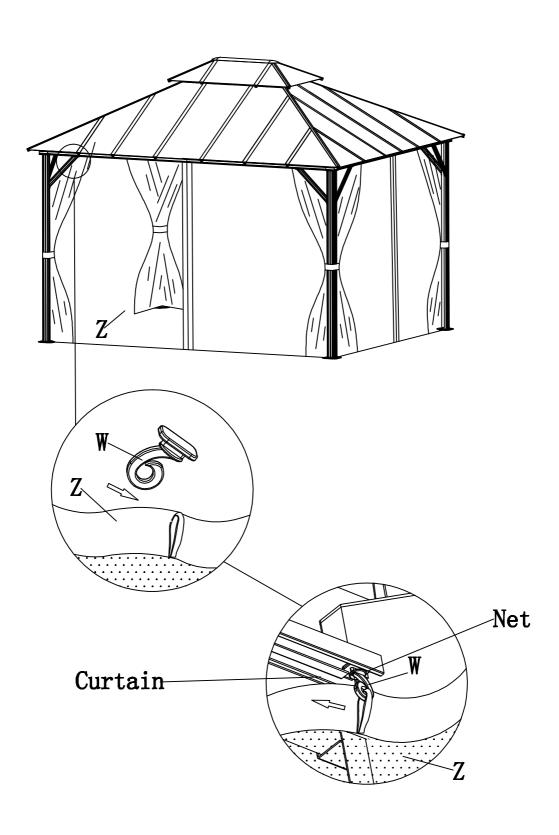

Hang up the yarn net hooks (W) into the loops of gauze (Z) and insert these hooks into the inside rail of the (B1)/(B2) and (B3)/(B4) crossbars.

STEP 16


X*****8

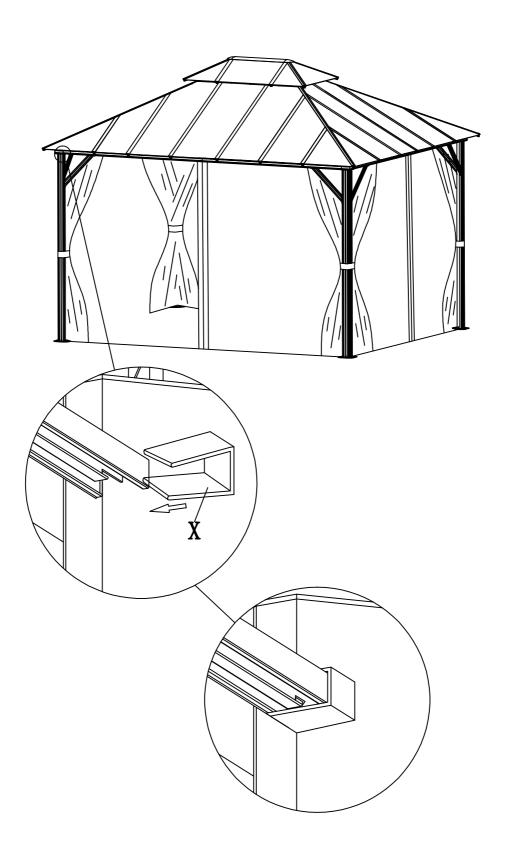

Then insert the hook stoppers (X) at ends of rail of (B1)/(B2) and (B3)/(B4) crossbars.

STEP 17

#6*4

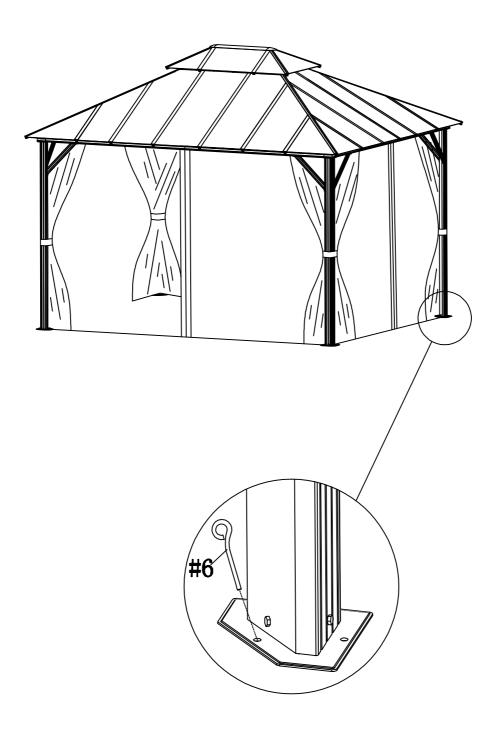

Use the stakes (#6) for ground fixing. Take note the anchoring devices to use may vary with ground status. Additional anchoring devices are not provided.