

Easy Cartridge Replacement Steps

Model : **COLD** SIDE

1. Remove the cold indicator plate carefully.

Tools needed



2. Loosen this screw



3. Remove the handle. Remove the bonnet by twisting it as shown




4. Remove the cartridge.



5. Remove the rubber washer and stainless steel spring. Insert the new rubber washer and stainless steel spring. Make sure they sit properly and securely before next step

6. Insert the new cartridge and fit the notches

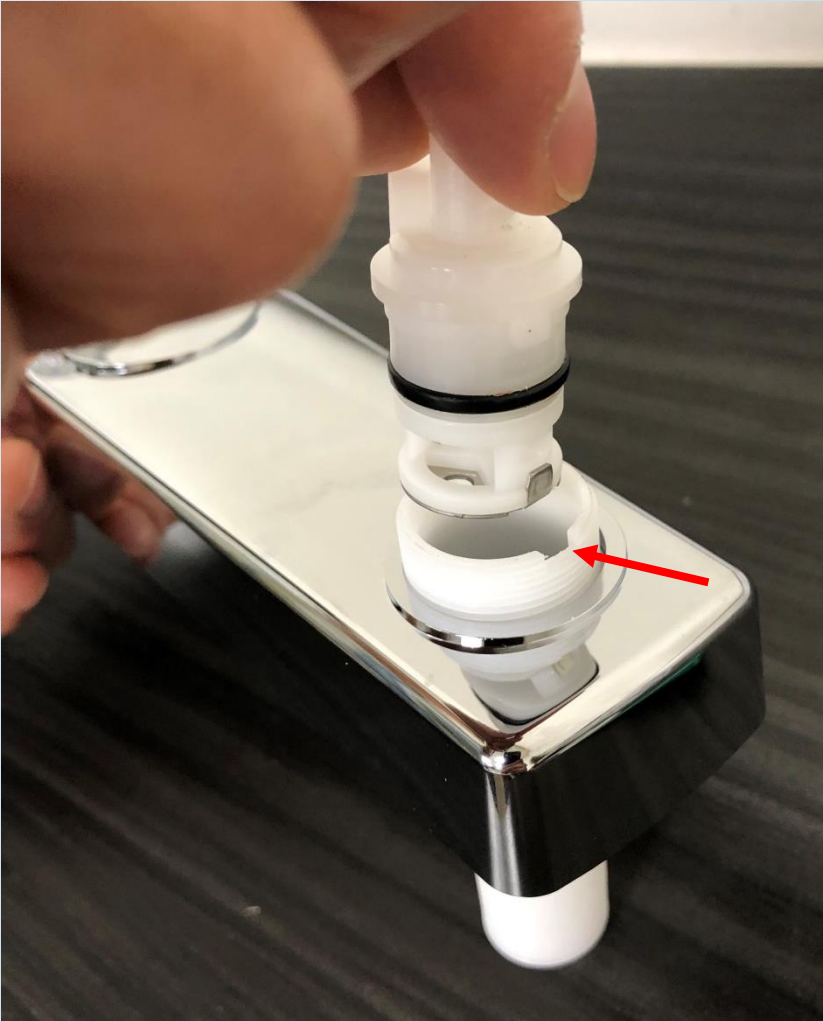

7. Tighten the bonnet



8. Assemble the handle and tighten the screw.



8. Assemble the cold indicator plate

