

One-light Wall Sconce

 Wall mounted • Damp location listed 

Description:

The organic features of this wall sconce make it seem like it's one with nature. The handmade, clear stone glass shade steals the show with its underwater-inspired ambiance. The shade is held in place by a minimalist black frame that transforms your home into a naturally beautiful soothing place for you and your family.

Specifications:

- Black (-031) (Painted)
- Steel Construction
- Clear Stone Glass Square Panel
- The organic features of this wall sconce make it seem like it's one with nature.
- The handmade, clear stone glass shade steals the show with its underwater-inspired ambiance.
- The shade is held in place by a minimalist black frame that transforms your home into a naturally beautiful soothing place for you and your family.
- Ideal for bedroom, hallway, foyer, bathroom, or living room.
- Perfect for transitional, modern, or contemporary settings.
- Measures 8-inch width by 8-1/2-inch height.
- Uses one integrated LED bulb (9.5w max).
- Able to be fully dimmable with dimmable bulbs.
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting Backplate for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	9.5w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	
Lumens/LPW (Delivered)	433/46 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Warranty	5-year limited warranty
Labels	cETLus Damp location listed
	Meets California Title 24 JA8-2016

P710080-031-30

Images:



Dimensions:

Width: Depth: 3-1/4"

Height: 8-1/2"

H/CTR: 4"

Width: 8"

Height: 8"

Photometrics:


P710080-031-30

ELECTRICAL DATA	P710080-031-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	9.5
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to
Dimming	Yes*

*See Dimming Notes for more information

P710080-031-30

LED Light Engine: 3000 K 90 CRI
System Wattage: 9.5
Fixture delivered lumens: 391
Fixture Efficacy: 42.6
Spacing Criteria:

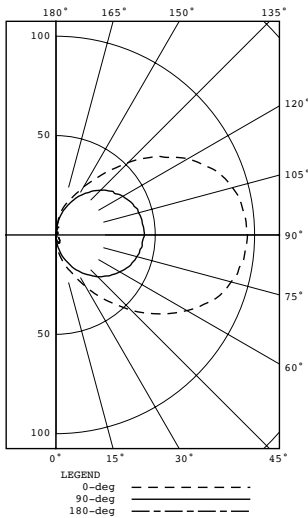

Test 19.01537 Test Date 09/04/19

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION				
CANDELA	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION
0.0	45.0	90.0	135.0	180.0	
0	0.9	0.9	0.9	0.9	0.9
5	4.2	4.1	2.5	1.1	1.1
15	13.9	17.0	9.6	4.2	3.7
25	23.4	22.9	16.3	6.7	4.4
35	37.5	29.6	23.4	8.4	3.3
45	53.5	38.6	29.7	8.5	2.4
55	69.0	49.6	34.8	8.1	1.8
65	82.4	61.0	39.3	7.9	1.1
75	91.3	69.6	42.2	7.4	0.6
85	95.6	73.0	43.6	7.1	0.3
90	96.4	73.2	44.6	7.5	0.5
95	95.8	72.3	44.3	7.5	0.1
105	92.0	67.8	43.1	7.6	0.4
115	82.7	59.9	40.7	7.8	0.8
125	68.0	49.1	36.3	7.6	0.7
135	51.5	39.0	31.8	8.6	1.5
145	34.2	30.9	25.5	9.0	2.2
155	22.0	24.8	18.3	7.1	3.7
165	14.0	19.1	11.0	4.8	3.6
175	0.8	0.8	0.7	0.5	0.2
180	0.2	0.2	0.2	0.2	0.2

FLUX

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	10	2.7
0-40	23	6.0
0-60	72	18.3
0-90	194	49.8
90-120	123	31.5
90-130	152	38.8
90-150	185	47.5
90-180	196	50.2
0-180	391	100.0

P710080-031-30

Dimming Notes:

P710080 is designed to be compatible with many Triac controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Leviton 6681

Leviton 6672

Lutron DVCL-253P

Lutron Caseta Wireless

Lutron SCL-153P

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.