

### Features

- High-arch swing spout with 160° rotation offers superior clearance for filling pitchers, chilling bottles, and cleanup
- 16-1/16" (408 mm) spout height
- Laminar flow
- Electronic puck touchpad allows user to select between ambient, chilled, near-boiling, or carbonated water
- Puck can be mounted directly on counter surface or on escutcheon plate
- Box includes: Faucet, electronic puck, escutcheon plate, supply lines
- Aquifer® 4-in-1 Grated Drain sold separately
- Requires K-34113 Aquifer® Beverage System (sold separately)

### Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

### Installation

- Single- or two-hole installation
- Flexible supply lines simplify installation

### Required Products/Accessories

K-34113 4-in-1 beverage system

### Recommended Products/Accessories

K-30928 4-in-1 grated drain



ADA

CSA B651

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651


### KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

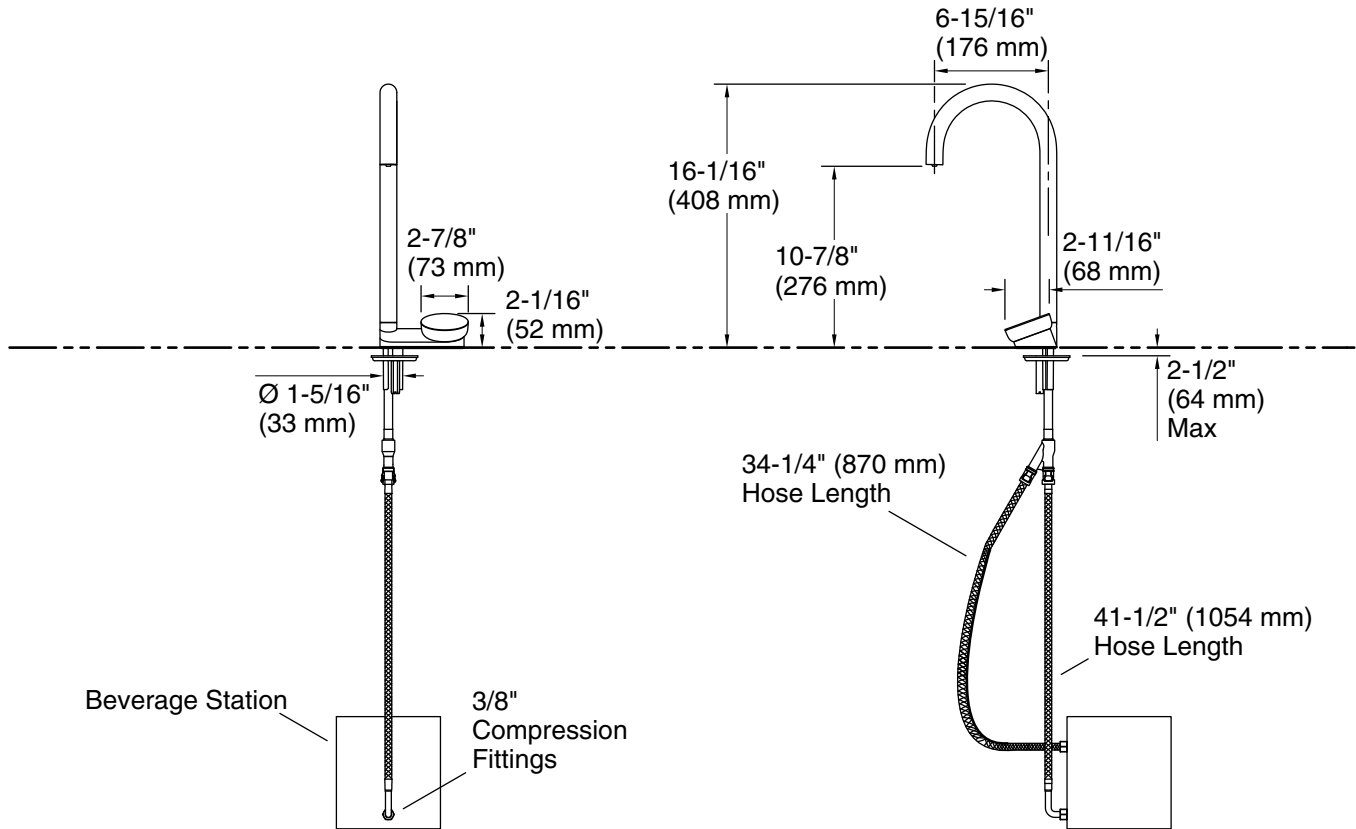

**Technical Information**

All product dimensions are nominal.

Faucet flow rate: 1 gal/min (3.8 l/min)

**Spout:**

Spout reach: 6-15/16" (176 mm)

**Notes**

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.