

## ASSEMBLY & INSTALLATION

*Please read carefully and save these instructions, as you may need them at a later date.*

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### ASSEMBLY AND INSTALLATION

1. Take the parts out of the mounting package. Place mounting strap (2) up against your outlet box (1). Position the mounting strap (2) so that the holes on the side are level and parallel with the floor. Secure mounting strap (2) to the wall's outlet box (1) using mounting screws (3) and a screwdriver. Tighten the screws securely. Pull the SUPPLY WIRES (8 & 10) and the SUPPLY GROUND WIRE (6) out from the OUTLET BOX (1) through the center of mounting strap (2).
2. Thread the rods (14, 15 & 16) onto the NIPPLE (16). Thread the SWIVEL (13) into the rod (14). Space the ELBOWS to right position.
3. Attach the power supply wires to the fixture lead wires by connecting the BLACK SUPPLY WIRE (10) to the SMOOTH FIXTURE LEAD WIRE (9) and the WHITE SUPPLY WIRE (8) to the RIBBED FIXTURE LEAD WIRE (7). Loop the FIXTURE GROUND WIRE (5) around the GROUND SCREW (4) of the MOUNTING strap (2).
4. Place backplate (12) over mounting strap (2). Ensure the holes in the backplate and on the side of the mounting bracket align. Insert small screws (11) into the holes on the side of the backplate (12) to secure it to mounting strap (2).
5. Screw light bulbs into the lamp sockets (17) and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label, **MAXIMUM 60W**. Rotate the glass shade (18) onto the lamp sockets (17) inside the iron lamp shade (19).

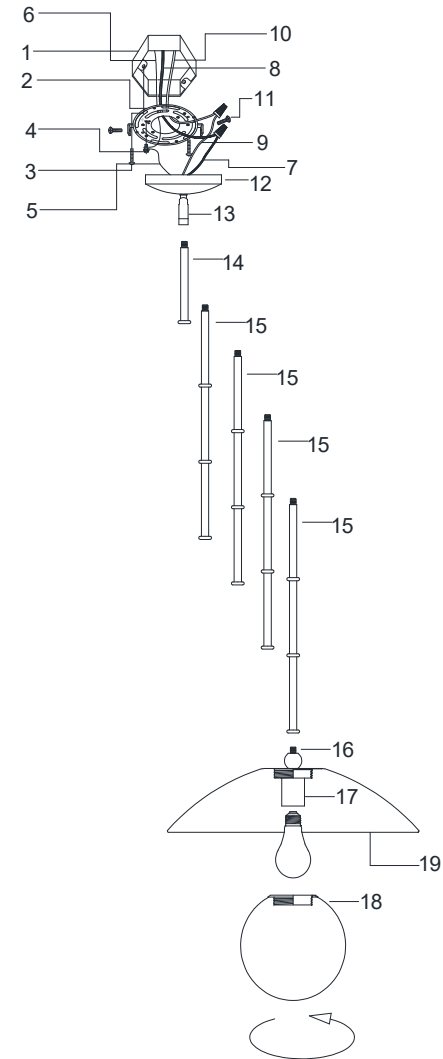

- |                        |                             |                         |
|------------------------|-----------------------------|-------------------------|
| 1. OUTLET BOX          | 7. RIBBED FIXTURE LEAD WIRE | 13. SWIVEL              |
| 2. MOUNTING STRAP      | 8. WHITE SUPPLY WIRE        | 14. ROD (4.875" x 1PC)  |
| 3. MOUNTING SCREW      | 9. SMOOTH FIXTURE LEAD WIRE | 15. ROD (14.75" x 4PCS) |
| 4. GROUND SCREW        | 10. BLACK SUPPLY WIRE       | 16. NIPPLE              |
| 5. FIXTURE GROUND WIRE | 11. SCREW (A)               | 17. SOCKET              |
| 6. SUPPLY GROUND WIRE  | 12. BACKPLATE               | 18. GLASS SHADE         |
|                        |                             | 19. IRON LAMP SHADE     |