


LAMP ASSEMBLY / SHADE INSTALLATION INSTRUCTIONS:

1. Before beginning assembly/shade installation, carefully unpack all parts and refer to illustrations for parts identification.
2. (Refer to **FIGURE 1**) Place the LAMP BASE on level surface. Proceed to attach the UPPER SECTION to the lower by threading the MALE THREADED PIPE into the center of the FEMALE THREADED COUPLING. Note: Depending on style purchased, lamp may be divided into more than (2) sections and may or may not have lamp base joined to end of lower section. Join all sections together. **WARNING!** Please take special care not to pinch or cut the ELECTRICAL CORD when joining sections.

FIGURE 1.

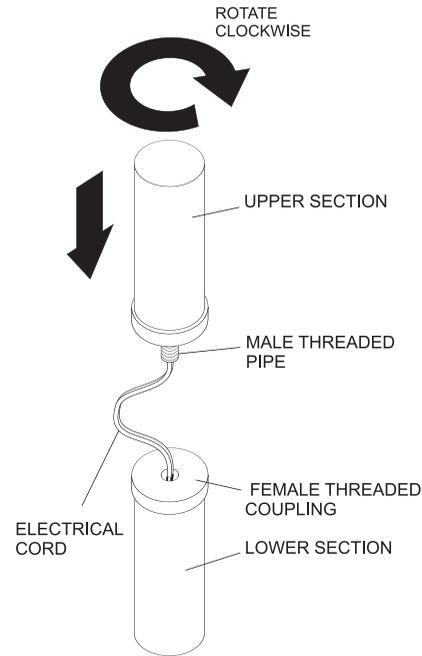

Note: Generic partial illustrations for clarity.

SHADE INSTALLATION: (depending on style purchased, refer to FIGURE 2, FIGURE 3 or FIGURE 4).

FIGURE 2: Locate the SHADE and place bottom into the SHADE HOLDER. Locate the SOCKET COLLAR and thread onto end of SOCKET. Hand tighten until snug. Install bulb referring to fixture markings and /or labels for maximum wattage. Note: Depending on style purchased, will be included (1) 3" MOUNTING DISC. This disc offers additional shade support and should be placed over socket on inside of shade prior to threading SOCKET COLLAR onto socket. Place DECORATIVE RING onto top of SHADE (inclusion depends on style purchased).

FIGURE 3: Locate the HARP and place end into HARP CLIP. Install bulb referring to fixture markings and / or labels for maximum wattage. Locate the SHADE and place over the top of HARP. Locate and thread the FINIAL onto top end of HARP. Tighten FINIAL until snug to secure SHADE.

FIGURE 4: Locate the SHADE and place bottom into the SHADE HOLDER. Locate the SOCKET COLLAR and thread onto end of SOCKET. Hand tighten until snug. Install bulb referring to fixture markings and /or labels for maximum wattage.

FIGURE 5: Thread end of SHADE SUPPORT STEM into the top of the BULB CLUSTER BODY. Tighten until snug Proceed to install bulb(s) referring to fixture markings and/or labels for maximum wattage. Remove (1) KNURL NUT from top of SHADE SUPPORT STEM and place to the side. Locate the WASHER (inclusion depends on style purchased) and place over SHADE SUPPORT STEM. (Note: the inclusion of KNURL NUT and WASHER depends on style purchased). Proceed align the center hole in the SHADE with the top of the SHADE SUPPORT STEM and lower shade onto stem. Thread KNURL NUT onto top of SHADE SUPPORT STEM protruding through shade center hole. Tighten until snug Locate the FINIAL and tread onto the SHADE SUPPORT STEM protruding through SHADE center hole. Tighten until snug.

