



Installation instruction


Model _____




Wrench



Bolt driver




Terminal



Screw

Installation Diagram

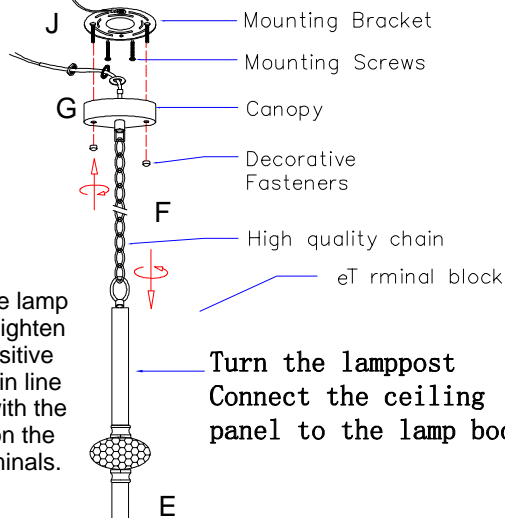


Step1 :

Install the bent pipe a with the lamp-head wire on B in turn, and tighten and fix it with the nut. The positive and negative poles in the main line are respectively connected with the positive and negative poles on the lamp-head line by wiring terminals. Cover C and tighten it with D

Step2 :

The central column E and Chain F connected with the lamp body, chain length can be adjusted according to demand, the main line of the lamp body and the power line connection, through the base G and Hanging Board J will be fixed on the ceiling lamp body

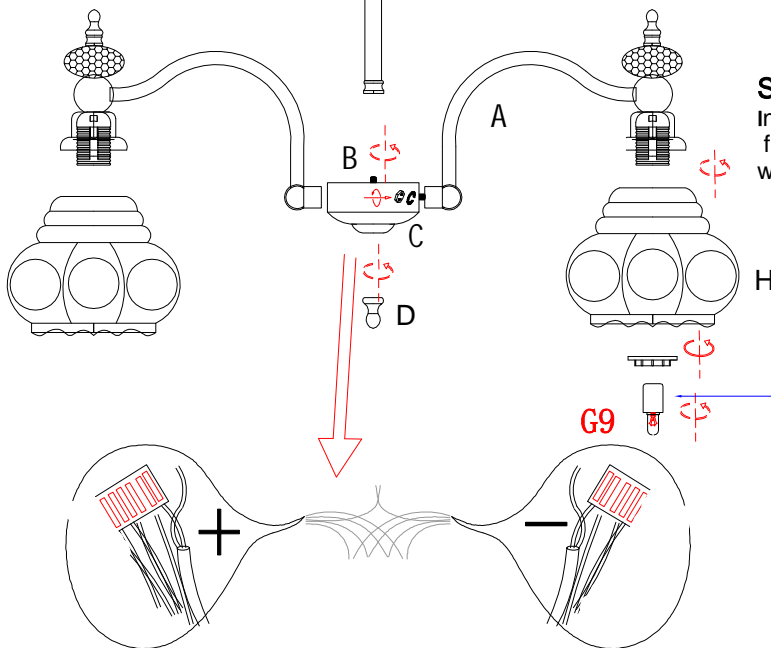

Step3 :

Install the glass lamp shade H on the lamp cap and fix the lamp cap glass with the black socket wrench. Then insert the G 9 bulb

Put the G9 LED bulb head button on




Matters needing attention


- 1 Rated power: 110-220 V, 50Hz, bulb power ≤ 40W.
- 2 Do not scratch the lamp surface and wire during installation, and wear gloves during installation.
- 3 The red wire of each luminaire shall connect phase line, assorted color line to zero line, ground line at ground mark.
- 4 Do not install in the ceiling that did not dry fully, the environment should be ventilated, dry.
- 5 The lamps and lanterns should not be close to acid or corrosive chemical objects or gases. They should not be cleaned with water and only be wiped with a clean soft cloth.
- 6 Must be installed by a professional electrician.
- 7 Power should be switched off when installing, cleaning and changing light bulbs.

Installation instruction


Model _____




Wrench



Bolt driver




Terminal



Screw

Installation Diagram

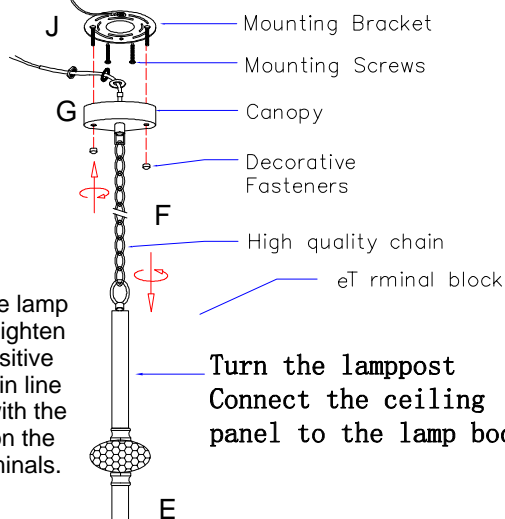


Step1 :

Install the bent pipe a with the lamp-head wire on B in turn, and tighten and fix it with the nut. The positive and negative poles in the main line are respectively connected with the positive and negative poles on the lamp-head line by wiring terminals. Cover C and tighten it with D

Step2 :

The central column E and Chain F connected with the lamp body, chain length can be adjusted according to demand, the main line of the lamp body and the power line connection, through the base G and Hanging Board J will be fixed on the ceiling lamp body

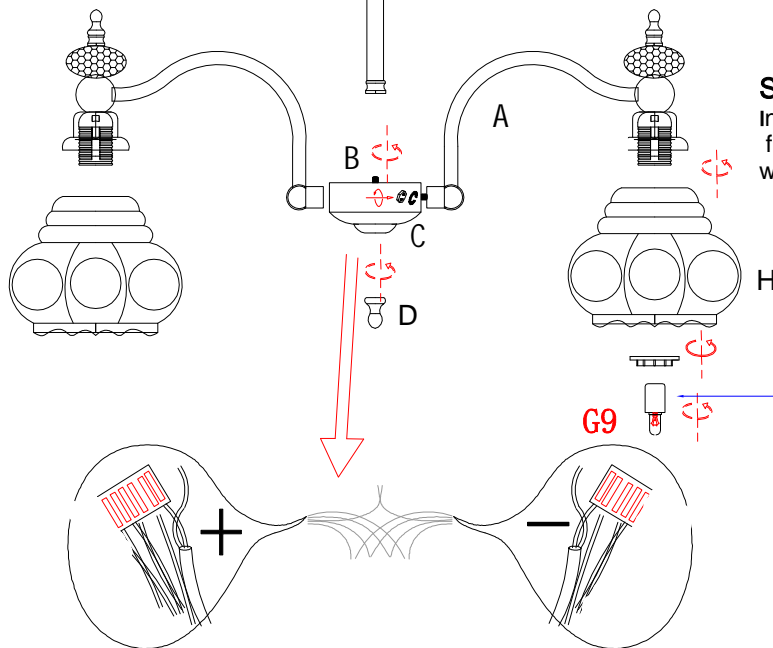

Step3 :

Install the glass lamp shade H on the lamp cap and fix the lamp cap glass with the black socket wrench. Then insert the G 9 bulb

Put the G9 LED bulb head button on



Matters needing attention

- 1 Rated power: 110-220 V, 50Hz, bulb power ≤ 40W.
- 2 Do not scratch the lamp surface and wire during installation, and wear gloves during installation.
- 3 The red wire of each luminaire shall connect phase line, assorted color line to zero line, ground line at ground mark.
- 4 Do not install in the ceiling that did not dry fully, the environment should be ventilated, dry.
- 5 The lamps and lanterns should not be close to acid or corrosive chemical objects or gases. They should not be cleaned with water and only be wiped with a clean soft cloth.
- 6 Must be installed by a professional electrician.
- 7 Power should be switched off when installing, cleaning and changing light bulbs.