


ASSEMBLY INSTRUCTIONS

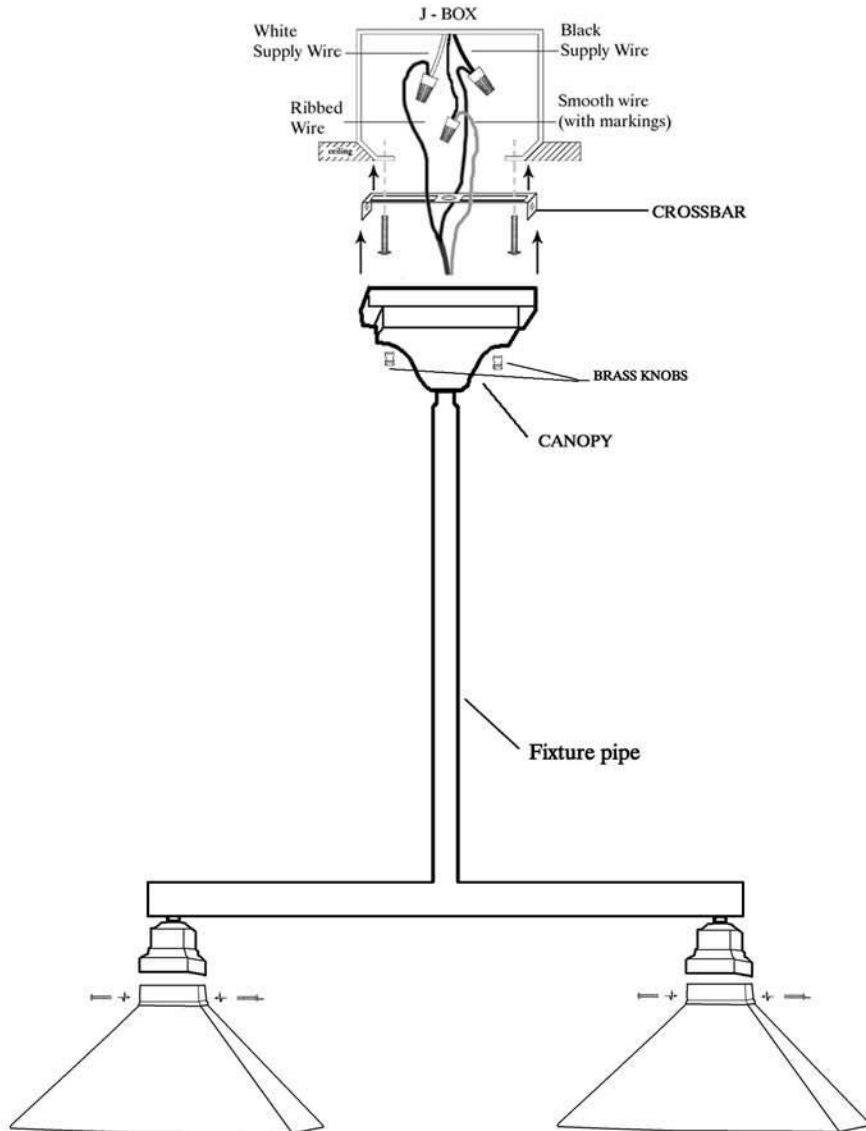

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

*** This is a two person job.***

1. Attach crossbar to J-Box.
2. Attach fixture wires to J-Box wires as shown. (wire as per local electrical code)
3. Attach fixture to J-Box using brass knobs.
4. Remove uno-ring from fitter socket, loosen (4) set screws from fitter hub.
5. Place shade up and over fitter socket.
6. Screw uno-ring onto fitter socket and tighten to shade.
7. Tighten fitter set screws into shade ring.