









①	 lampshade 3pcs	⑤	⑤ long light arm 1pcs  ④socket ring 1pcs ③lock nut & teeth lock washer 1pcs	⑧	 electric wire 1pcs		X 1PCS
				⑨	 splicing connector 2pcs		X 1PCS
							X 3PCS
② ③ ④	② short light arm 1pcs  ④socket ring 1pcs ③ lock nut & teeth lock washer 1pcs	⑥ ⑦	⑥ light arm with metal tube 1pcs  ④ socket ring 1pcs ⑦metal tube 1pcs ③ lock nut & teeth lock washer 1pcs	⑩	 canopy 1pcs		X 3PCS
				⑪	cap nut 2pcs		X 3PCS
							X 3PCS


1. Rotate to install the tube ⑦ to the light arm ⑥.
2. Install the light arm ②, light arm ⑤ and light arm ⑥ to the canopy ⑩ with lock nut & teeth lock washer ③.

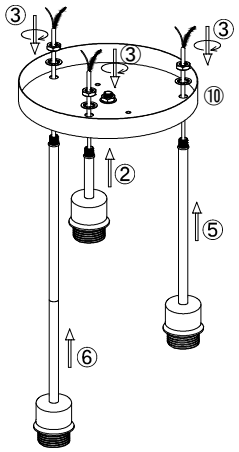

1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.(Note: one inlet hole can put 2 or 3 wires inside)

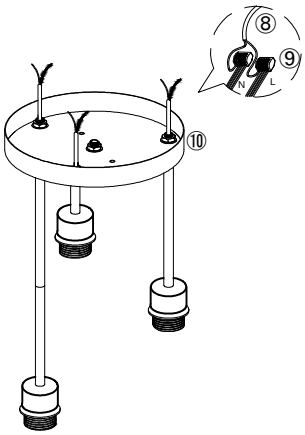

3. Connect all the wires and wire ⑨ together by parallel with connectors ⑧ (all live line-L use one connector, and neutral Line-N use another connector) .

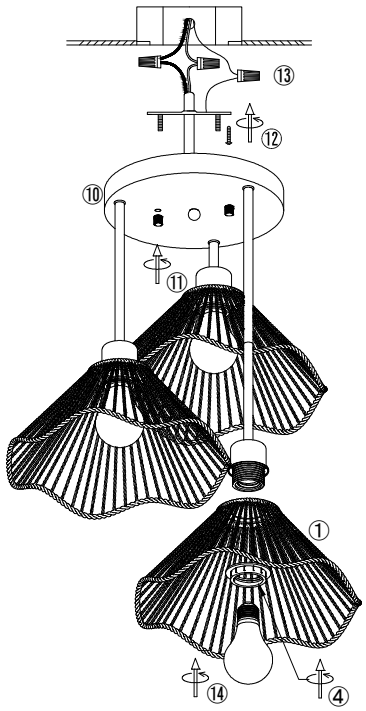

4. Install the bracket to the ceiling junction box with screw ⑫.
5. Connect the wire to your home line with cap connector ⑬.
6. Install the fixture to the bracket with cap nut ⑪.
7. Install the lampshade ① to the bulbholder with socket ring ④.
8. Install the bulb ⑭.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !