

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder






Safety
glasses



Phillips
screwdriver

HARDWARE INCLUDED



PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE




MOUNTING OPTION for using attached bulb that comes with the product.




Mounting plate




Canopy



Nut



Led bulb




Glass shade



Lamp arm



Pipe

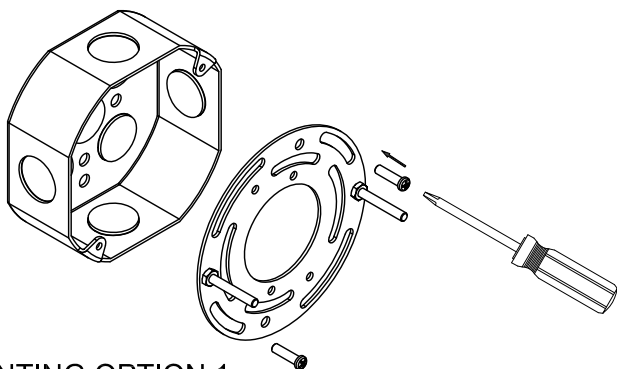


MOUNTING OPTION 1

(With junction box)

STEP 1a

Unscrew the ball nuts from the mounting unit.
Use the mounting screws to attach the mounting unit to the junction box (not included).

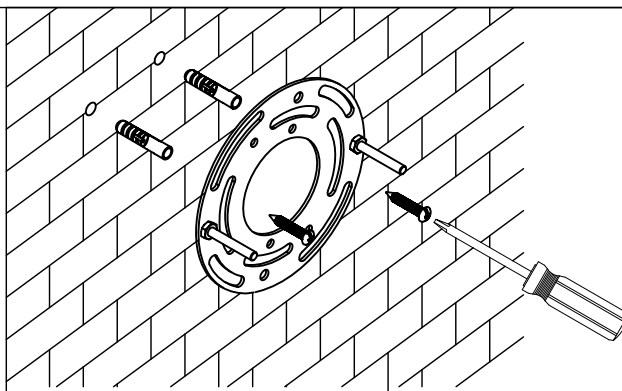

MOUNTING OPTION 2


(No junction box)

STEP 1b

If there is no junction box, you can also install the wall lamp directly by fixing the mounting plate on the wall.


Step 2

Attach the Lamp arm to the canopy.

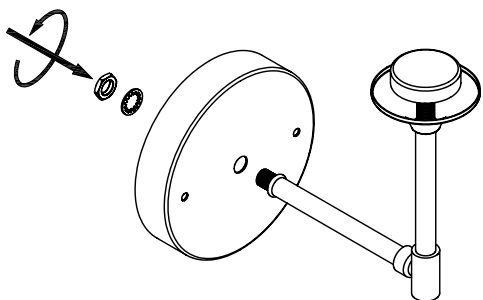


Step 3

Attach the fixture to the mounting plate with the nut.

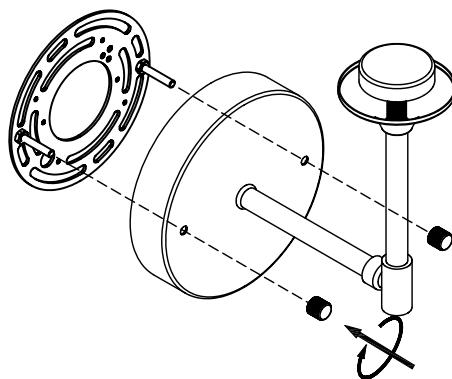

Step 4


Install the glass shade.

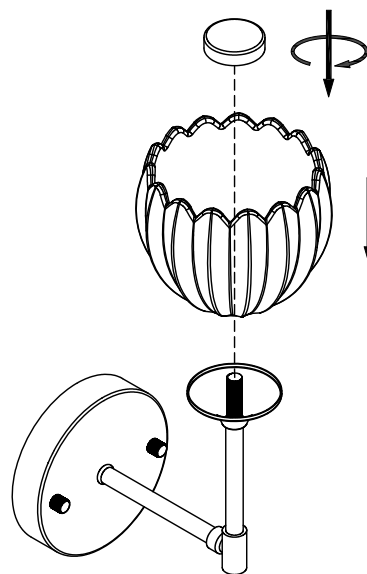

Step 5

a. Install the pipe.

b. Attach the Led bulb to the lampshade.

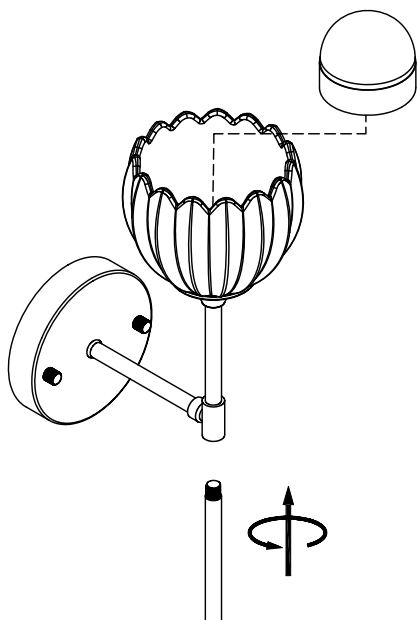

SCONCE

