




Installation Guide





1. Insert revolver, washer and bolt into the installing hole.



2. Insert the nut into the two holes perfectly and screw it with screwdriver, then put the cap on it.



1. Place the toilet seat cover on bowl, insert the bolt, washer and rubber cord in hinge install hole-order;
2. Adjust position of toilet seat cover to match toilet set suitably after insert rubber cord into toilet install hole;
3. Tighten the bolt and close the hinge cover;
4. Insert the nut into the two holes perfectly and screw it with screwdriver, then put the cap on it.

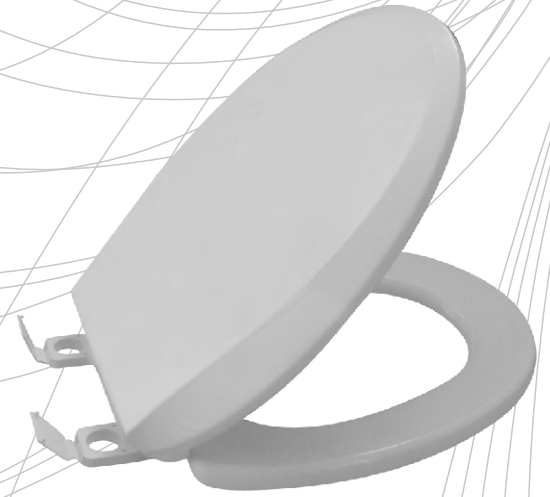

TOILET SEAT COVER

toilet seat for regular round front bowl
siege de toilette pour cuvette reguliere a devant rond

Please abide by the following illustrations to ensure safety

Please read carefully the relative notice before operation. This manual lists many kinds of marks in detail to avoid injuring body, or suffering loss on property. The marks and explanations are as follows, please keep it in the eyeable place.


Warning! It may cause injuring body or damaging object if ignore this mark.

● means "forbidden".


Warning!		Do not stand on the toilet cover, and do not place heavy objects on it. (Or else it may cause crack.)	
		Do not clean the toilet seat with household cleaners, volatile, thinner and eradicator, or use nylon brush, and avoid chlorine-containing, corrosive and a brasive cleaners. Maintain the shiny surface by using soft fabric and clean water. (Or else it may cause abrasion or crack.)	
		Do not let child play the toilet cover, to avoid hurting fingers and other accident.	

Relative Notice

Open and close toilet seat cover tenderly. (Or else it may cause crack.)




Avoid sunlight and other lamp-house irradiate directly. (Or else it may turn colors.)




- Toilet seat and cover both have the function of slow closing.
- Closing speed varies for room temperature and usage frequency.
- Please open toilet seat and cover completely, the function of slow closing will fall off in the midway, or hurt fingers etc.

Maintenance



1. Periodical maintenance

- Wipe gently with wet fabric.
 - Wipe off smut
- Wash it with neuter cleaners (such as soap powder), and then dry it with clean fabric.



2. Cleaners

- Do not wipe and wash toilet seat and cover with abrasive powder.
- Do not use disinfectant, eradicator or other aerosol cleaners.
- Some chemical and cosmetic in bathroom may damage toilet seat and cover.