











ASSEMBLY INSTRUCTION


OVAL SIDE CHAIR

A Chair Back	B Seat Cushion	C Front Leg	D Allen Key 5mm	E Long Bolt ø5/16" x 3-1/4"
				
1 pc	1 pc	2 pcs	1 pc	4 pcs
F Bolt ø5/16" x 2-1/2"	G Short Bolt ø5/16" x 1-1/2"	H Lock Washer ø5/16"	I Flat Washer ø5/16" x 19mm	
				
4 pcs	2 pcs	10 pcs	10 pcs	




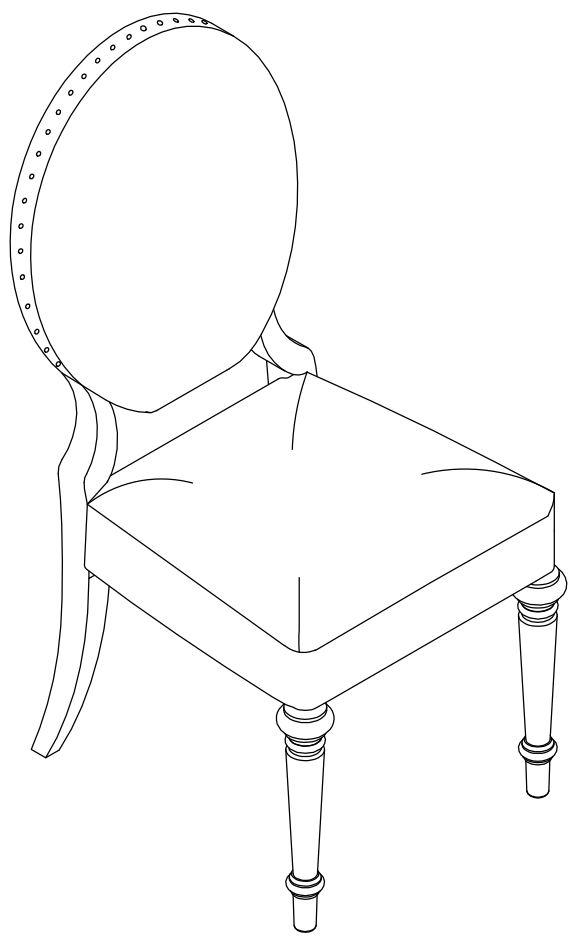This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

- 1** Put the Chair Back (A) on a smooth flat surface, attached the Seat Cushion (B) to the Chair Back (A) use Short Bolt (G), Long Bolt (E), Lock Washer (H) and Flat Washer (I) on both of holes of Chair Back (A). Turn the Allen Key (D) in the Short Bolt (G) and Long Bolt (E).

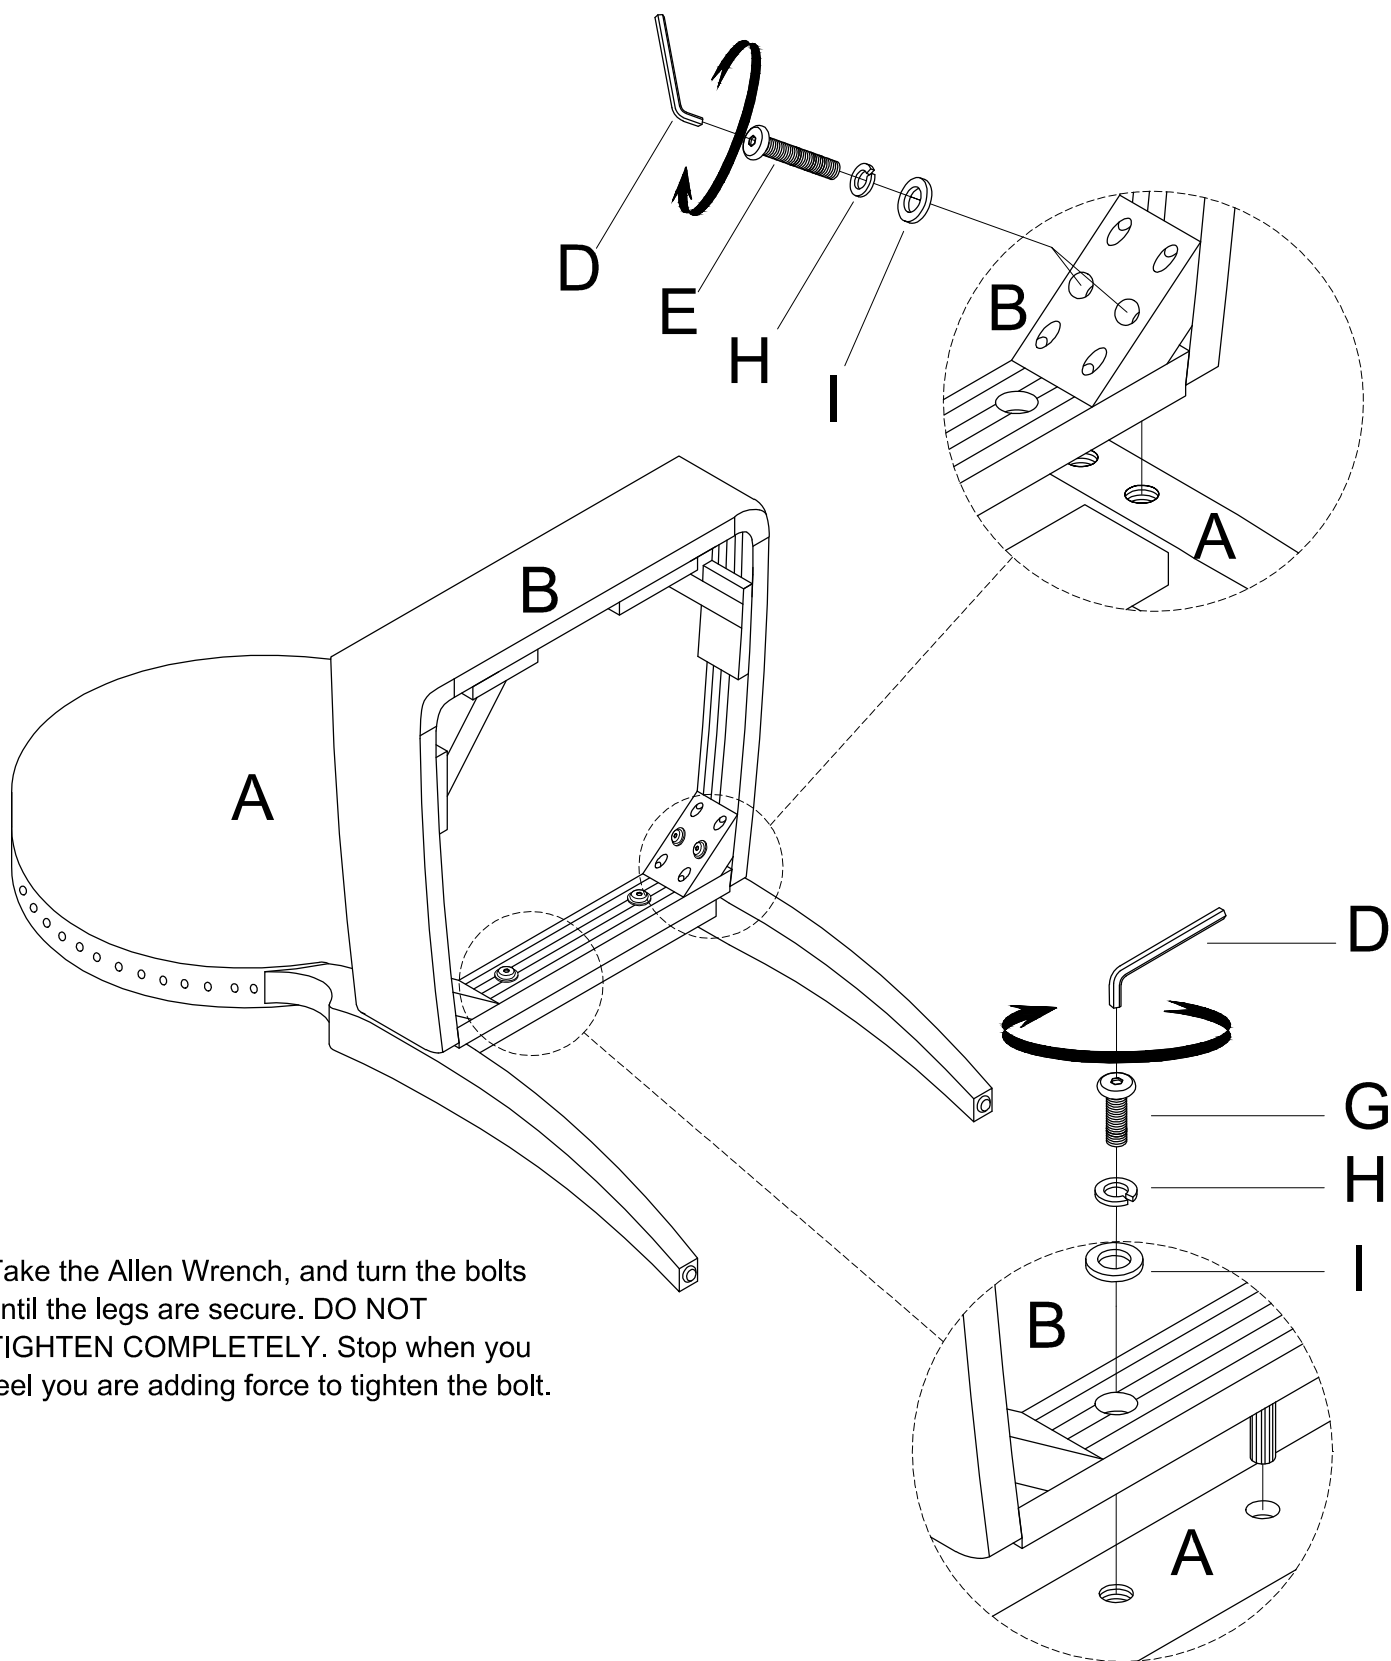

- 2** Attached the Front Leg (C) to the Seat Cushion (B) use Bolt (F), Lock Washer (H) and Flat Washer (I) on both of holes of Seat Cushion (B). Turn the Allen Key (D) in the Bolt (F).

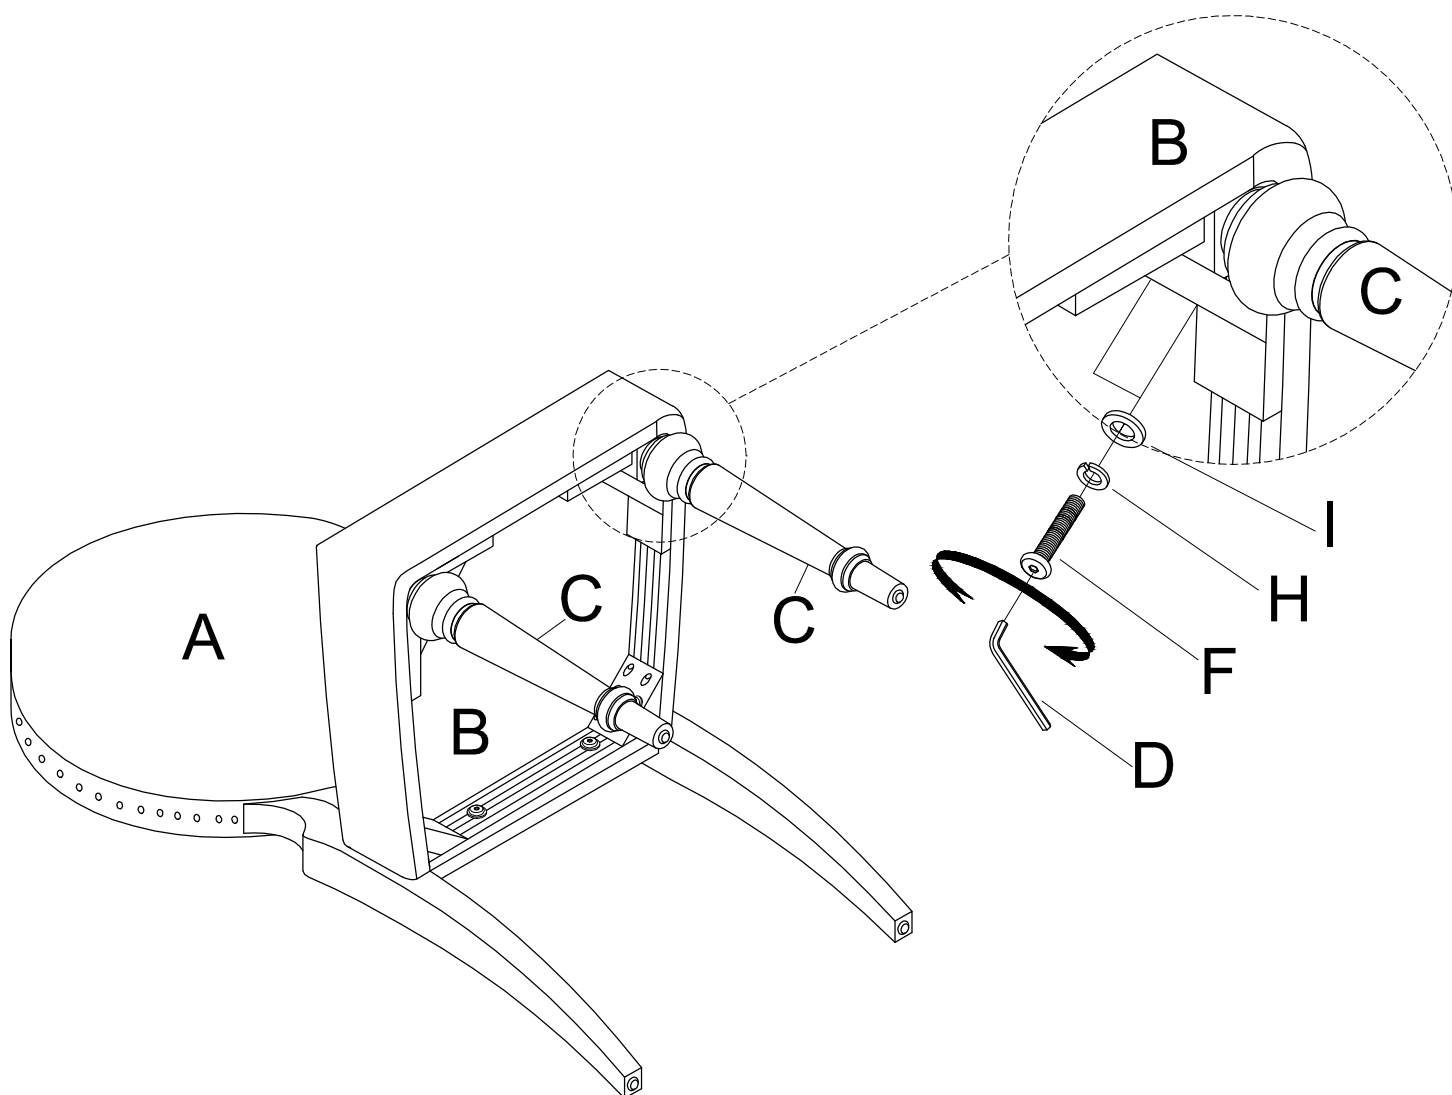

Stand chair up on an even surface and check that it is balanced.
If there is slight wobble, apply downward pressure in the corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts.
If balanced, apply downward pressure evenly in the center and tighten all bolts.
Do not over-tighten beyond hole depth.

Helpful Tip:

-Instead of applying downward pressure while reaching under to tighten bolts, have someone sit in the chair while you tighten the bolts.

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.