



RiverBath® | K-1394-H2

66" drop-in heated whirlpool bath with chromatherapy

Features

- Four Riverjets and eight hydromassage jets can be individually adjusted for water flow and direction
- Two variable-speed pumps for adjusting massage intensity
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood
- Built-in heater
- Lighted keypad control
- Floating remote control
- Spacious design accommodates up to two bathers
- Requires jet trim kit (sold separately)
- Waterfall pillow and two removable bath pillows



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 22:20 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
cUL Listed
UL Listed

Technical Information

All product dimensions are nominal.

Drain Location:	Center
Drain Hole Diameter:	2-1/4" (57 mm)
Basin Area, Bottom:	54-1/2" x 44" (1384 mm x 1118 mm)
Basin Area, Top:	61-5/8" x 54-1/2" (1565 mm x 1384 mm)
Water Depth:	19" (483 mm)
Water Capacity:	196 gal (741.9 L)
Minimum Floor Load:	54 lbs/ft ²
Weight:	260 lbs (117.9 kg)

Material

- Acrylic

Recommended Products/Accessories

K-23726 Drain treatment
K-23732 Tub & shower cleaner

Required Products/Accessories

- K-9398 Whirlpool trim kit
- or
- K-T37392 Rotary-turn bath drain trim
 - K-T37391 Rotary-turn bath drain trim
- or
- K-78439 45" cable bath drain
 - K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Pump:	240 V, 20 A, 50/60 Hz
Heater:	240 V, 20 A, 50/60 Hz

Electrical Component Ratings


Pump:	240 V, 9 A, 50/60 Hz
Number of Speeds:	Variable
Pump:	240 V, 9 A, 50/60 Hz
Number of Speeds:	Variable
Heater:	240 V, 17 A, 50/60 Hz, 4000 W

Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



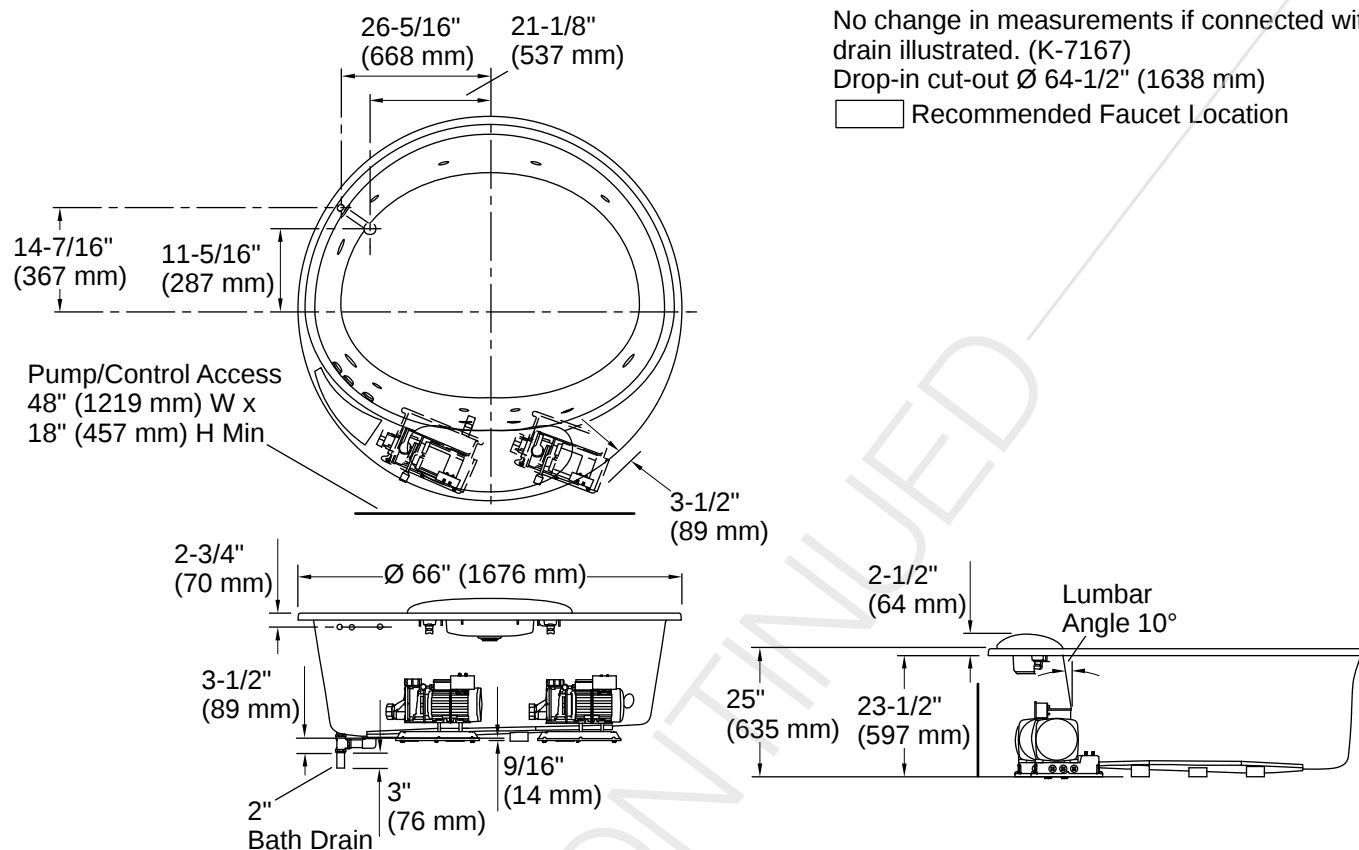

Installation

- Drop-in

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Model allows fill valving of choice. Use the pre-installed dual fill ports or a separate fill spout if desired.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 22:20 - US-CA