

ASSEMBLY INSTRUCTIONS

(For LD22509-1(S))

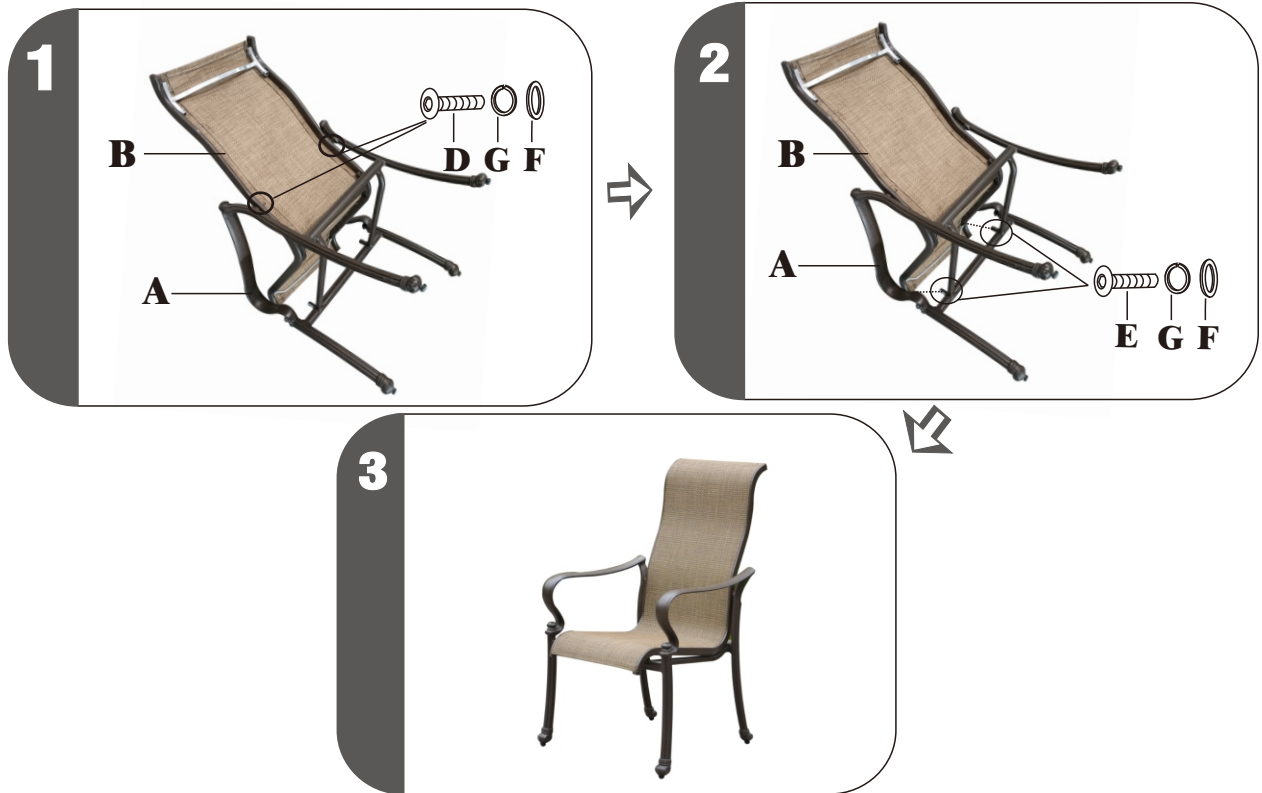
ATTENTION:








1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.

Assembly steps:

1. Put the back (B) in the back area of seat (A), connect the arm and back by bolts (D), flat washers (F) and lock washers (G), Do NOT tighten the bolts first.
2. Attach the base (B) on to the seat (A) using bolts (E) with the flat washers (F) and lock washers (G), after assembled 2 bolts, you can tighten all these bolts, and make sure it's tight enough.
3. Turn the chair onto its legs and use the foot leveler to level the legs.

Warning : please do not use acid or alkaline washing liquid to clean the product.



Parts list	Parts picture	Description	Q'ty	Parts list	Parts picture	Description	Q'ty
A		Seat	1	D	 (M6*40)	Bolt	2
				E	 (M6*30)	Bolt	2
B		Base	1	F	 (M6)	Flat washer	4
				G	 (M6)	Lock washer	4
				H		Wrench	1