

Features


- Acrylic
- VibrAcoustic technology emits sound waves and offers a surround sound experience
- Bask heated surface with three temperature settings
- Six transducers and a control amplifier with 25' (7.6 m) of wiring
- User-friendly high-resolution color touch screen (in polished chrome)
- Available with four chromatherapy lights [-VBCW]
- Drop-in or under-mount installation
- 27-1/2" (699 mm) soaking depth
- Two raised corner seats, at 6-3/4" (171 mm) and 11-7/8" (302 mm) from bath floor
- 48" (1219 mm) x 48" (1219 mm) x 34" (864 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- UL 1795
- CAN/CSA C22.2 No. 218.2

CUBE VIBRACOUSTIC® BATH WITH BASK™ HEATED SURFACE K-1969-VBW ALSO K-1969-VBCW

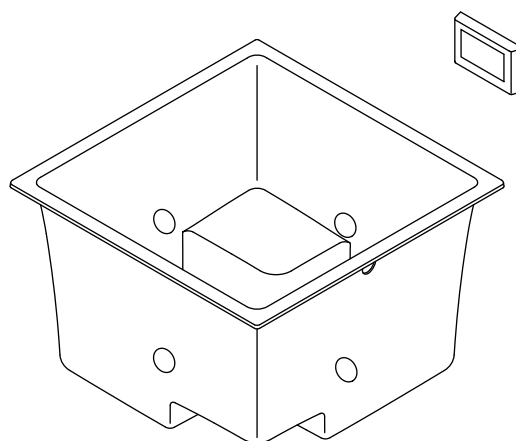

Colors/Finishes

- 0: White
- CP: Polished Chrome
- BN: Brushed Nickel
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1969-VBW	Cube VibrAcoustic bath with Bask	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1969-VBCW	Cube VibrAcoustic bath with Bask and chromatherapy (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories			
K-8150	Cable drain AND		<input type="checkbox"/> NA
K-8134	Cable drain trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Optional Accessories			
K-578	Under-mount kit		<input type="checkbox"/> NA
1172315	VibrAcoustic interface mounting plate (non-CP finish)		<input type="checkbox"/> BN

Product Specification

The acrylic cube VibrAcoustic bath shall be 48" (1219 mm) in length, 48" (1219 mm) in width, and 34" (864 mm) in height. Bath shall feature VibrAcoustic technology, which emits sound waves and offers a surround sound experience. Bath shall feature Bask heated surface with three temperature settings. Bath shall feature six transducers and a control amplifier with 25' (7.6 m) of wiring. Bath shall feature a user-friendly high-resolution color touch screen (in polished chrome). Bath shall be available with four chromatherapy lights [-VBCW]. Bath shall be for drop-in or under-mount installation. Bath shall have a 27-1/2" (699 mm) soaking depth. Bath shall have two raised corner seats at 6-3/4" (171 mm) and 11-7/8" (302 mm) from bath floor. Bath shall be Kohler Model K-1969-____-____.

UNDERScore®

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	39-3/8" (1000 mm) x 39-3/8" (1000 mm)			
Basin area, top	44-5/8" (1134 mm) x 44-5/8" (1134 mm)			
Weight	120 lbs (54.4 kg)			
To overflow:				
Water depth	27-1/2" (699 mm)			
Capacity	171 gal (647.3 L)			
* Approximate measurements for comparison only.				
Drop-in cutout	47" (1194 mm) x 47" (1194 mm)			
Amplifier/ control	15 W (per channel)	120 V	50/60 Hz	-
Heater	65 W	120 V	60 Hz	1.1 A

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Amplifier/control/heater	120 V, 15 A, 50/60 Hz
--------------------------	-----------------------

Installation Notes


Install this product according to the installation guide. Ensure the bath, user interface, amplifier, and transducers are functional before completing the installation.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

Locate the bath within 24" (610 mm) of a GFCI-protected 120 V, 15 A grounded electrical outlet. A second grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier. One electrical service may be used for the entire bath and related electrical components.

Hot water supply should be 70% of capacity or greater. Installations will vary.

Floor support under bath must provide for a minimum of 97.9 lbs/square foot (478.2 kg/square meter) loading.

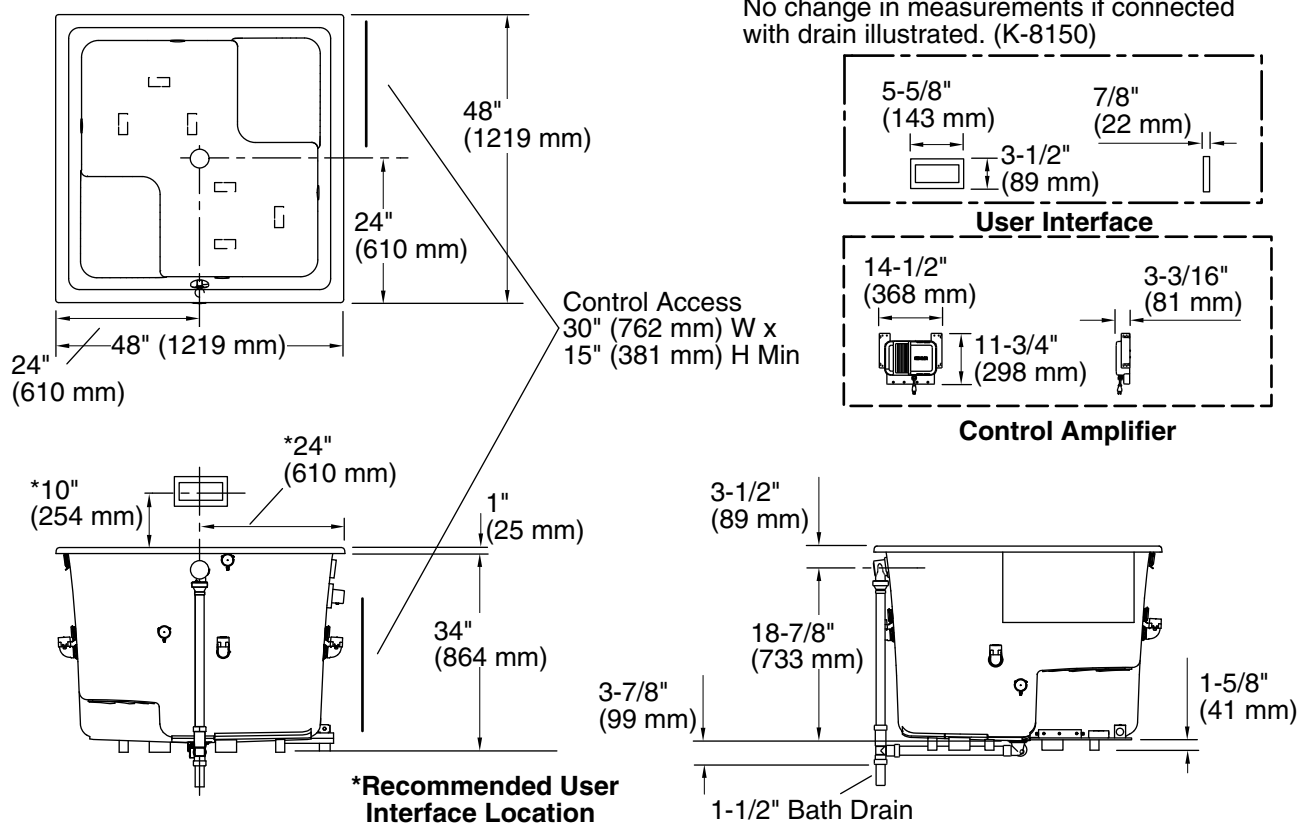

Product Diagram