

Features

- Solid metal construction for durability and reliability
- Intended for urinal installations with 3/4" spud coupling connection
- Electronic infrared sensor with Tripoint™ technology for accurate activation
- 0.5 gpf (1.9 lpf) flow rate
- Flushing technology offers reliable and accurate performance across pressures
- Activation distance is factory set - no adjustments on-site
- Chloramine resistance on all rubber exposed to waterway
- Manual courtesy flush button (works even if batteries have expired)
- 24 hour sentinel flush operates automatically if unit not flushed for 24 hours
- Includes four 1.5 V AA batteries
- Fixture-mount design
- WaterSense® compliant when used with K-4960-ET or K-5016-ET urinals



ADA **CSA B651** **OBC**


Codes/Standards

ASME A112.18.1/CSA B125.1
CSA B64
CSA B125.3
ASSE 1037
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty

See website for detailed warranty information.

*11-3/8" (289 mm) minimum with a
6" (152 mm) critical level above the fixture

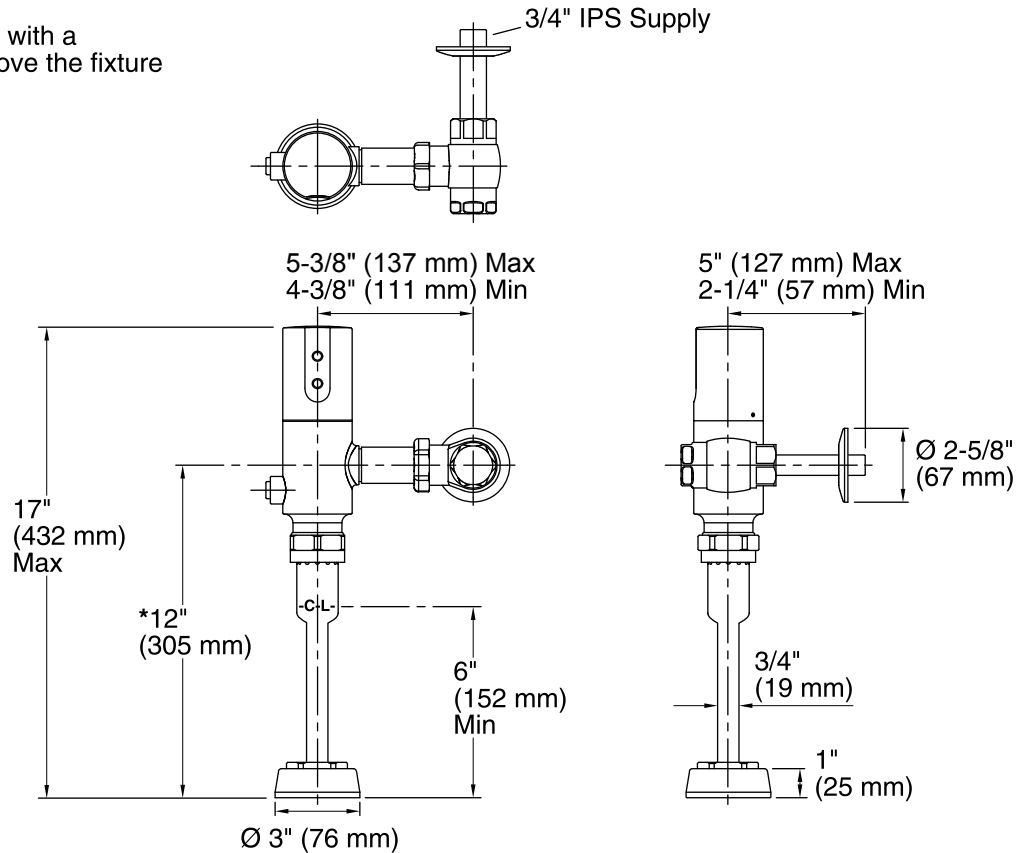

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)
Pressure: 80 psi (5.5 bar)
Power source: AA 1.5 V, included

Notes

Install this product according to the installation guide.

IMPORTANT! Maintain a 6" (152 mm) minimum critical level above the fixture to prevent back-siphonage.

Operating pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.