

ASSEMBLY INSTRUCTIONS

Cavill 16" Pendant


Item # RL5841

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver Wire Strippers
Wire Cutters

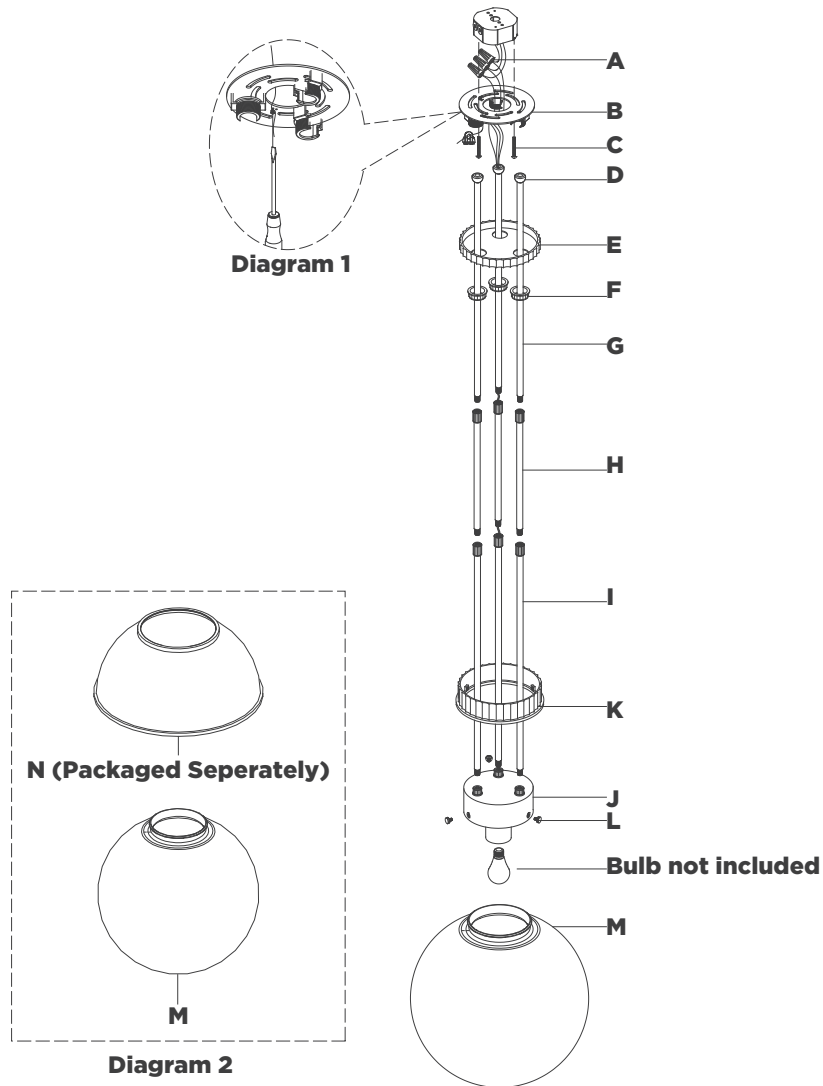

1. Carefully remove all parts from the box. Place on a clean, soft surface.
 2. Remove mounting plate **(B)** from canopy **(E)** by removing collar ring **(F)**.
 3. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
 4. Place metal cover **(K)** onto top of fixture **(J)**.
 5. Feed electrical wires through bottom rods **(I)** and connect to fixture body **(J)**. Repeat for middle rods **(H)**, connecting to bottom rods **(I)**.
 6. Continue feeding wires through collar rings **(F)**, canopy **(E)** and top rod **(G)**.
 7. Holding fixture upright, slide collar rings **(F)** and canopy **(E)** down and rest on fixture body **(J)**. Then connect top rods **(G)** to middle rods **(H)**.
- NOTE:** Slide components down slowly to avoid damage.
8. Hang fixture swivel balls **(D)** to the center of mounting plate **(B)**.
 9. Cut excess wires, being sure to leave enough to reach the junction box. Separate wires and strip insulation on each 5/8".

RALPH LAUREN


ASSEMBLY INSTRUCTIONS

Cavill 16" Pendant

Item # RL5841

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

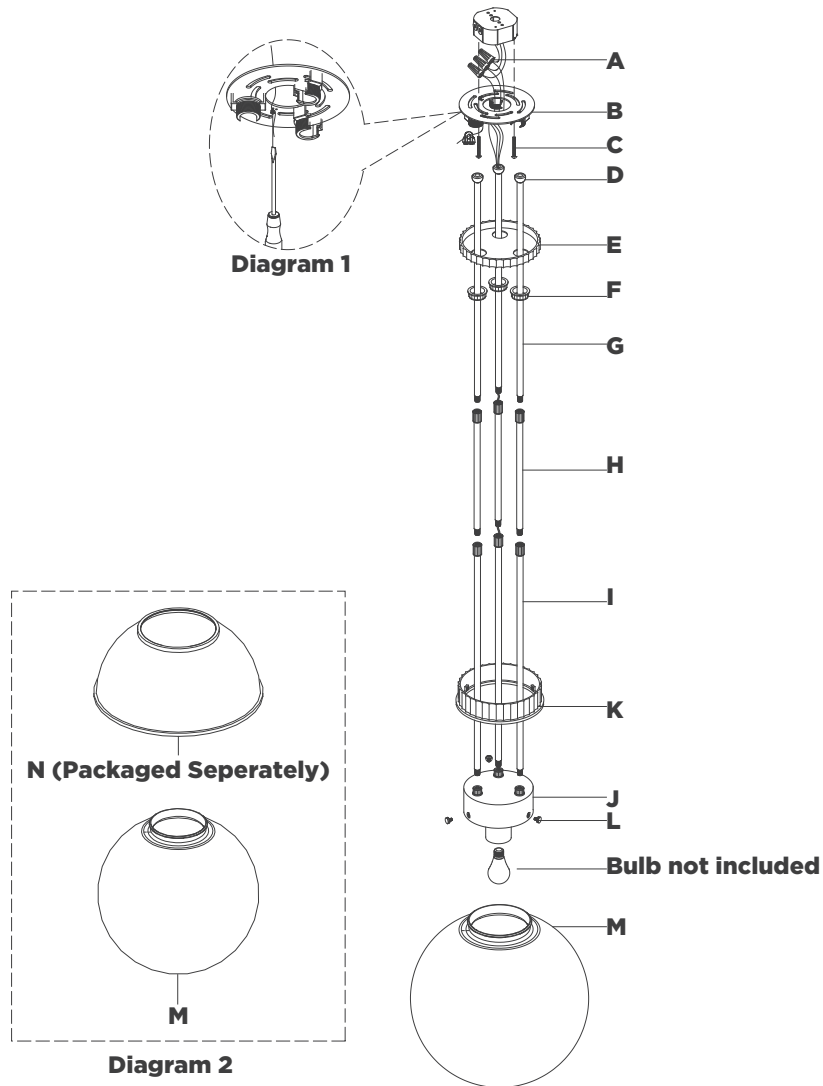

10. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (A).

NOTE: It is imperative that the fixture is grounded.

11. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
12. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut (A).
- CAUTION:** Do not reverse the hot and neutral connections.
13. Make sure all wire connections are tight, then carefully tuck into the junction box.

14. Install canopy (E) to mounting plate (B) and secure with collar rings (F).

15. Install light bulb into the socket.

16. Remove thumbscrews (L) from fixture (J), then install glass shade (M) to fixture (J) and secure with thumbscrews (L).
note: do not overtighten otherwise glass shade could be damaged.

METAL SHADE OPTION:

16. Remove thumbscrews (L) from fixture (J).
17. Place metal shade (N) onto glass shade (M), then install glass shade (M) to fixture (J) and secure with thumbscrews (L).

NOTE: Do not overtighten otherwise glass shade could be damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

RALPH LAUREN

