



Reach™

One-piece compact elongated dual-flush toilet

K-3983-S

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Top-mount dual-flush actuator offers a choice of 0.8 or 1.28 gallons per flush (gpf).
- Skirted trapway simplifies cleaning.
- Reach Quiet-Close™ elongated seat allows seat to close quietly.

Installation

- Standard 12-inch rough-in.
- Supply not included.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.

Recommended Products/Accessories

1023457 Wax Ring/Hardware Kit
1265114 Connector Hose



Codes/Standards

ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
--	---	-------

KOHLER®

Reach™ One-piece compact elongated dual-flush toilet K-3983-S

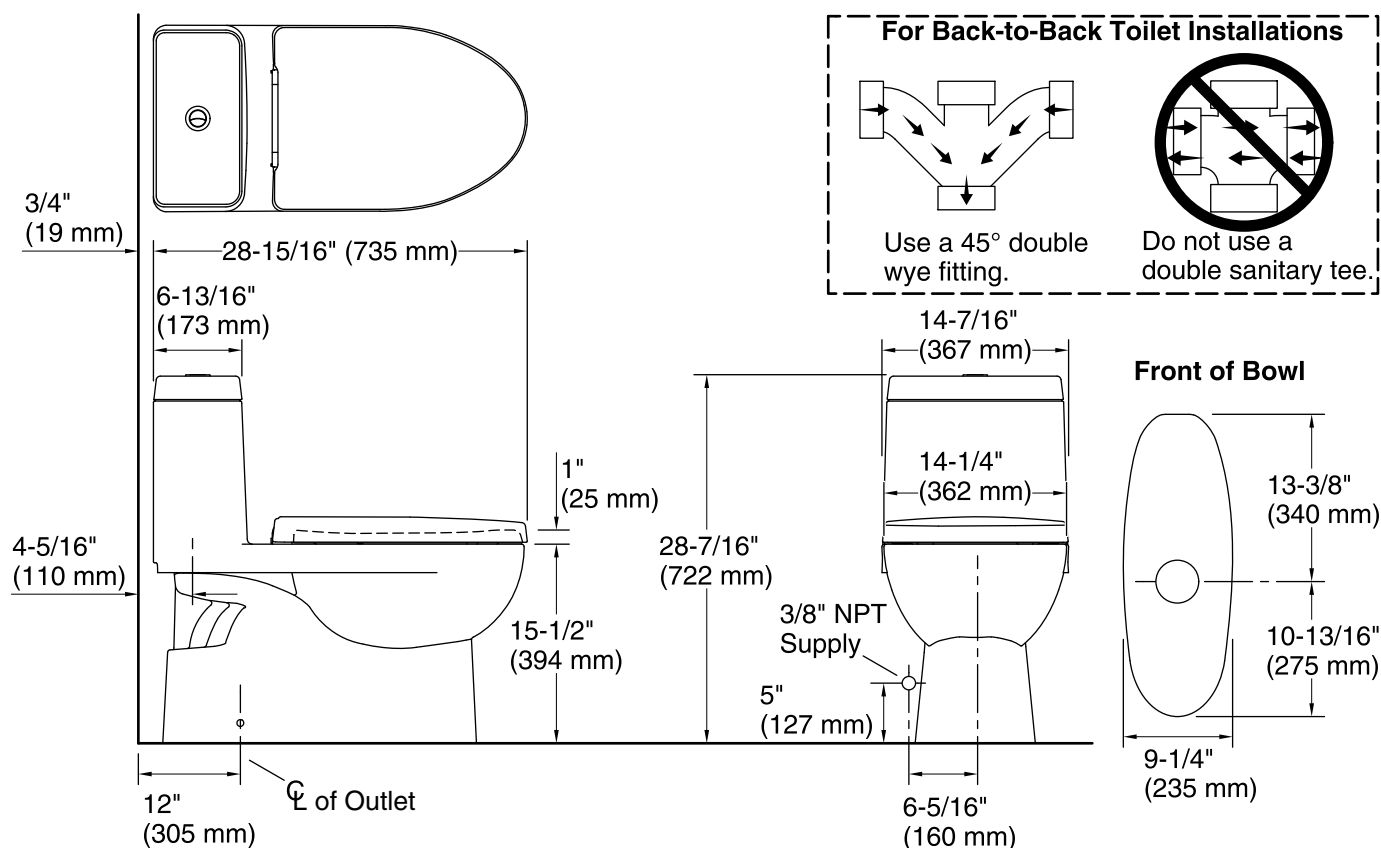

Technical Information

All product dimensions are nominal.

Toilet type: One-piece, Floor-mount

Bowl shape: Elongated

Flush type: Gravity siphon jet

Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Reduced: 0.8 gpf (3 lpf)

Rim to water surface: 6-1/4" (159 mm)

Rough-in: 12

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa)

Max static pressure: 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

IMPORTANT! The rough-in must be 12" (305 mm) or more from the base of the wall or baseboard. Install or relocate the supply and outlet as necessary to conform to rough-in dimensions.

If this toilet is installed in new construction, install a new supply stop following the dimensions in the diagram.

In installations with the supply stop installed, the existing supply stop may need to be relocated if it is less than 8-1/2" (216 mm) from the centerline of the toilet. Dry fit the toilet to confirm if the supply stop needs to be relocated.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

1-31-2019 13:46 - US/CA

THE BOLD LOOK
OF **KOHLER®**