



Parts

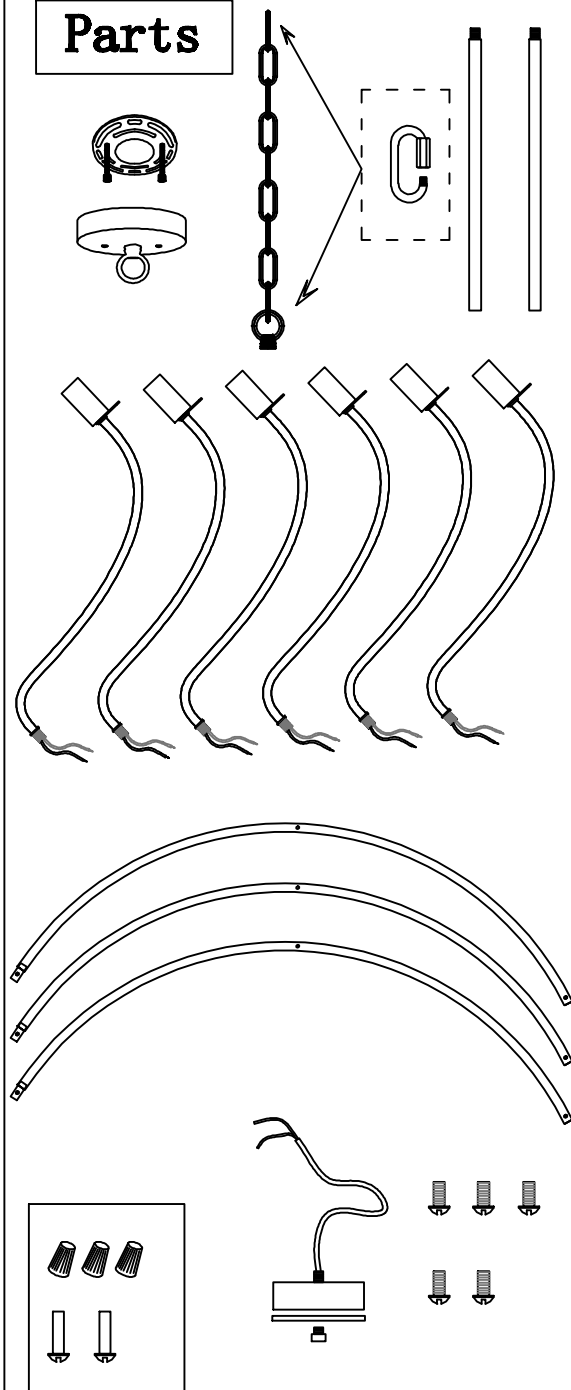


Steps 1

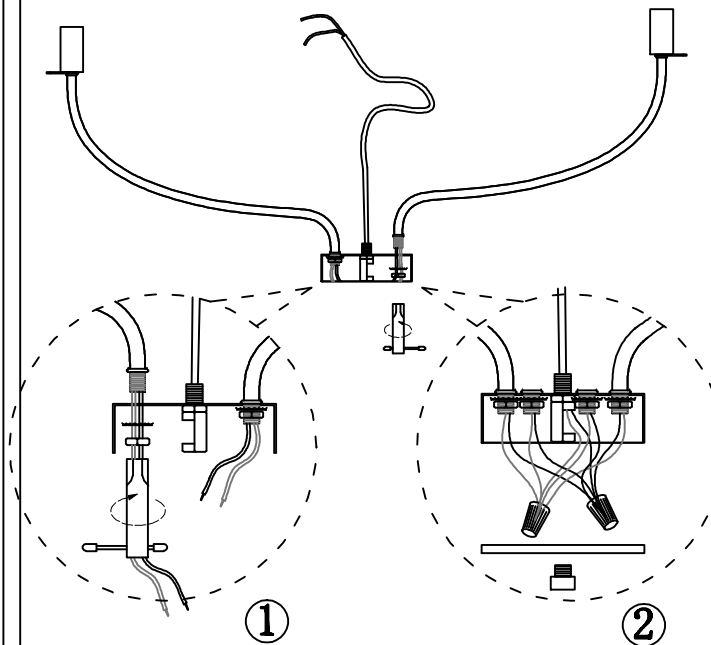


1. Assemble each lamp arm to the light fixture. Fix the lamp arm to the canopy with the washer and nut.
2. Connect the same color lamp wire together with the wire nut. (black for "L", white for "N") Lock the fixture body cover with the ball nut.

Steps 2

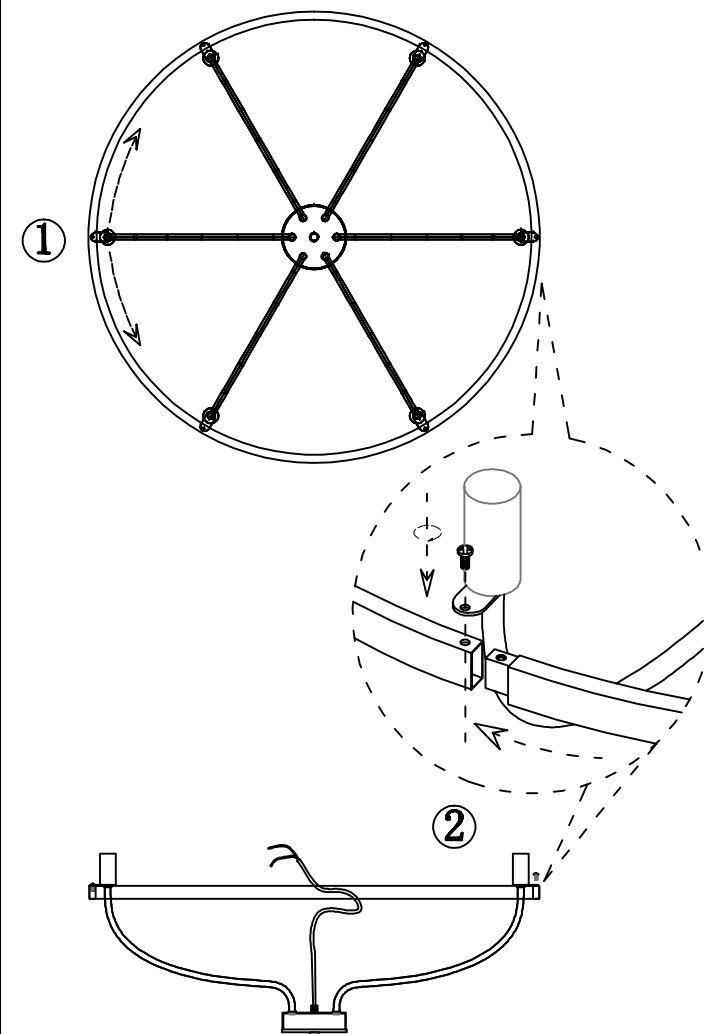


1. Adjust the positions of the six lamp arms evenly as shown in the figure.
2. The 6 light arms are respectively installed on the spliced circles and fixed by screws. (Note: Align the circle interface before tightening it with screws)

Steps 3

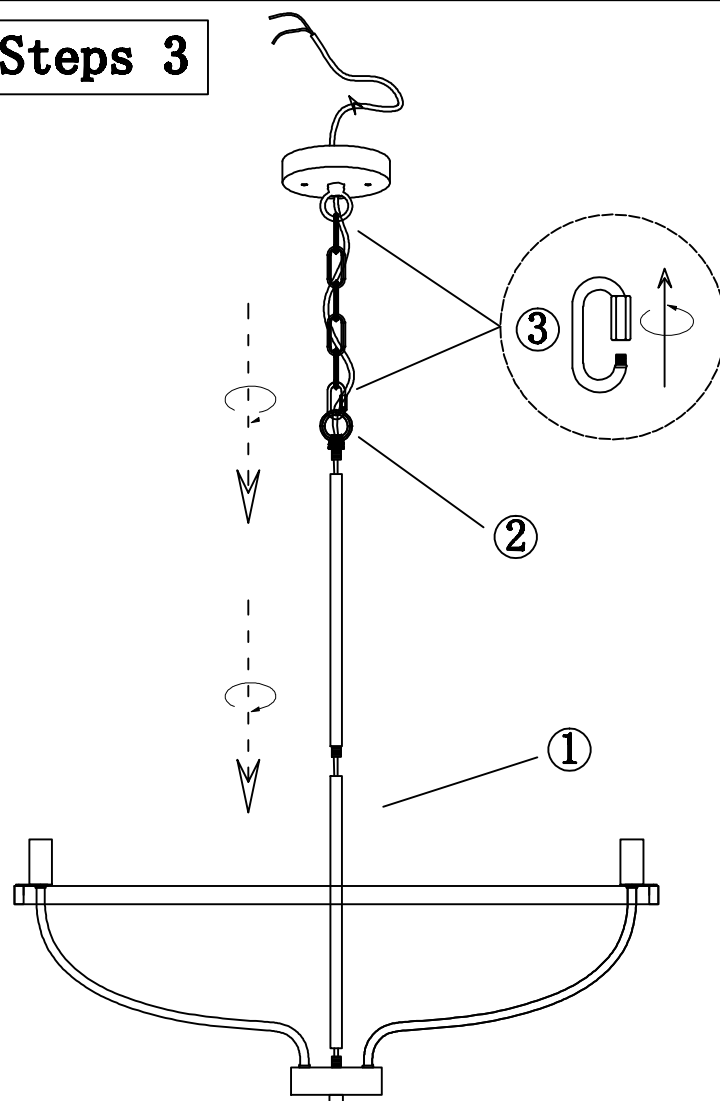

1. Pass the main line through the suspender, and the twist the suspender to the canopy.
2. Twist the lifting ring onto the boom.
3. Pass the main line through the chain and ceiling box, loosen the safety buckle as shown in the figure, link the chain with the lamp body and tighten the safety buckle.

Steps 4

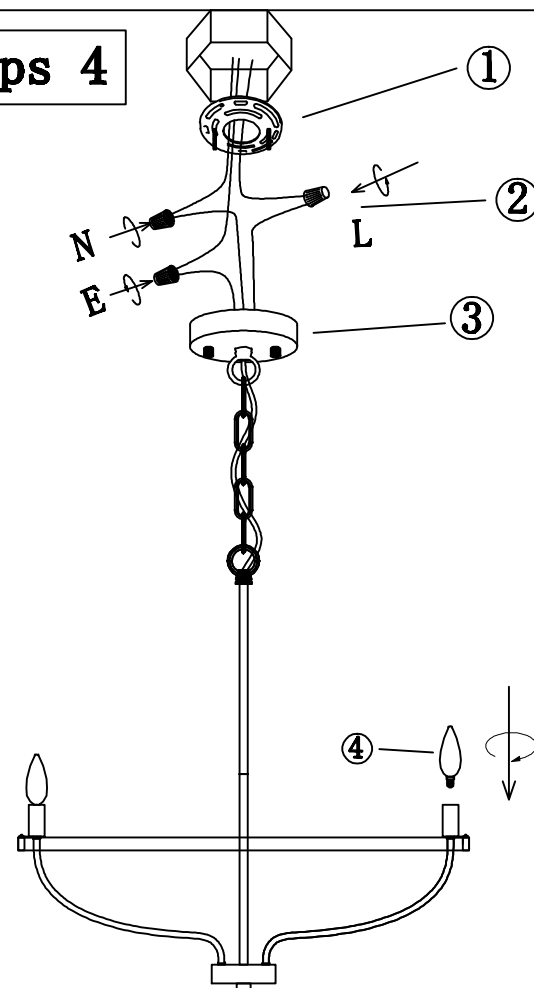

1. Assembled the mounting bracket to the ceiling junction box with the screw
2. Connect the power cord out from the ceiling junction box to lamp wires with the lead wire and wire nut. according the color to connect. (U.S. - black for "L", white for "N", copper wire for "Ground E")
3. Assemble the canopy to the mounting bracket with the screw.
4. Install the lamp socket, Install the light bulb (bulb not included)