



Purist® | K-T97328-4

Floor-mount bath filler trim with handshower

Features

- Single lever handle allows for both on/off activation and temperature setting
- Diverter switches water flow from bath fill to handshower, and returns to bath fill position when water is turned off
- 7 gpm (26.5 lpm) maximum flow rate at 45 psi
- 1.75 gpm (6.6 lpm) handshower flow rate
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with other products in the Purist collection



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:26 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 12-1/16" (306 mm)

Flow Rate

Faucet Flow Rate: 7 gpm (26.5 l/min)

Handshower Rated Maximum Flow: 1.75 gpm (6.6 l/min)

Valves

Required Valves: Thermostatic, Volume Control

Material

- KOHLER finishes resist corrosion and tarnishing
- Premium metal construction for durability and reliability

Recommended Products/Accessories

K-23723 Faucet cleaner
K-14375 24" Double towel bar
K-14436 24" towel bar
K-14443 Robe hook
K-14377 Pivoting toilet paper holder
K-14435 18" towel bar
K-14441 Towel ring
K-14444 Vertical toilet paper holder

Required Products/Accessories


- K-97339 Mounting block for select floor-mount bath fillers

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



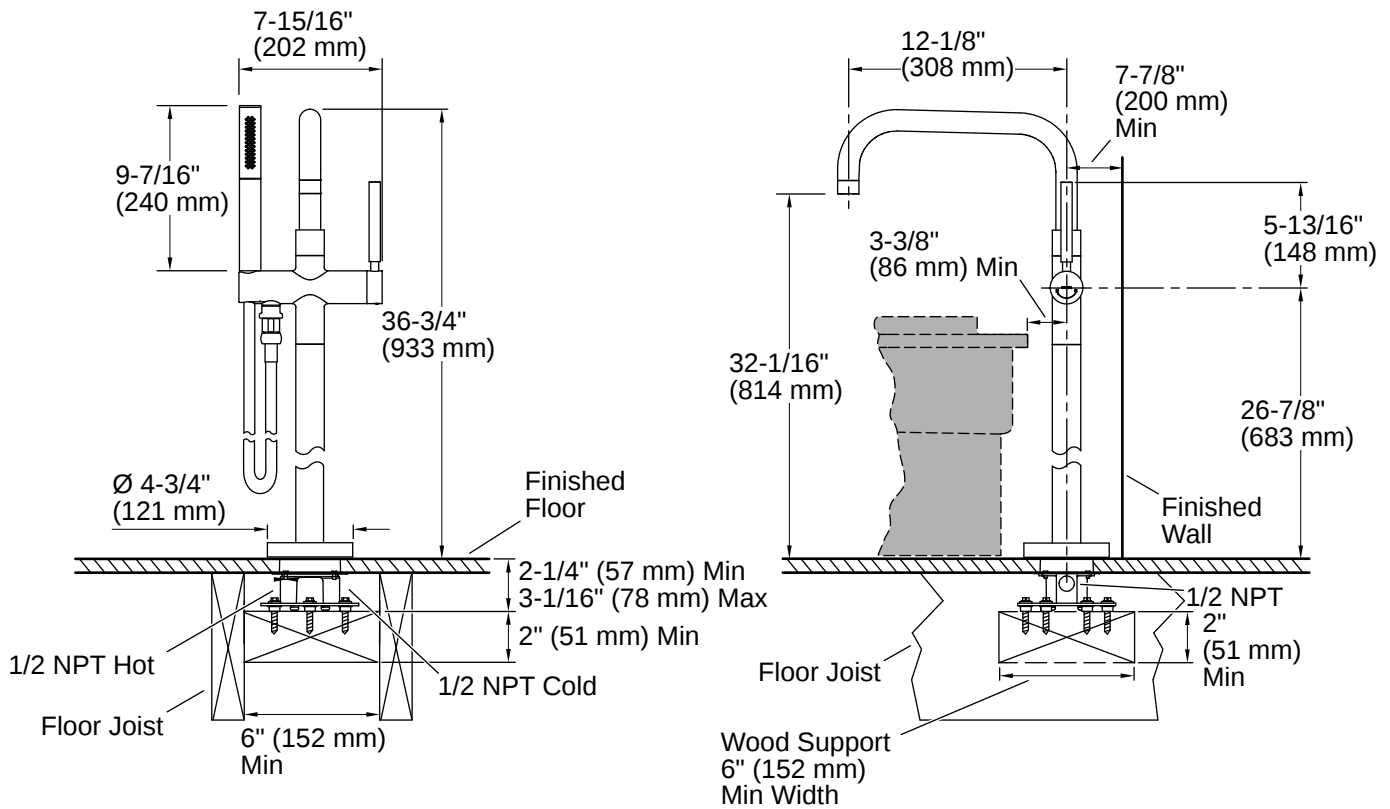

Installation

- Floor-mount
- Compatibility with bathtub varies by application

Installation Notes

Install this product according to the installation instructions.

Adequate floor support is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application. Concrete can be used as the floor support. Requires 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, not included.

