



Project:

Date:

Prepared By:

Comments

FEATURES

- Patented can-free design with J-box and spring loaded clips attached to LED trim
- IC rated for contact with insulation and Air Tight to prevent heating and cooling losses
- Dimmable to 10% with approved LED dimmers
- Wet-location rated
- Title 24 Compliant (CRI >90)
- ENERGY STAR®
- Interchangeable trim rings available to customize the look of the ceiling

APPLICATIONS

Conference Room
Medical Office
Office Lobby
Residential
Retail

CERTIFICATIONS

OPTICS

- Magnetic interchangeable trim rings available
- Frosted white lens
- Regressed reflector

... Visit our website for more information.

TRIM ORDERING OPTIONS

Model Number	Kelvin (CCT)	Watts	Lumens	CRI	Trim Color
EV608941WH30	3000K	13	826	93	White Can-free

SPECIFICATIONS

Warranty:	5 Years	Max. Ambient Temp:	45° C	R9-Value:	Beam Angle:	99°
Expected Life:	50,000 hrs	Min. Ambient Temp:	-18° C	Power Factor:	THD:	<20%






Project: Date:

Prepared By:

Comments:

DIMMING COMPATIBILITY

March 30, 2018		Easy Up Dimmers (Require neutral wire connection)					
Brand	Type	Series	Model #	Wiring	watts	dimming method	Notes
Lutron	ELV	Diva	DVELV-303P	Single-pole/3-way	300	slide with ON/OFF button	3-Way only works with a 3-Way switch
	ELV	Maestro	MAELV-600	Single-pole/multi-location	600	Digital	Multi-location only work with MA-R (not a dimmer)
	ELV	Nova T	NTELV-300	Single Pole	300	slide to off	
	ELV	Skylark	SELV-303P	Single-pole/3-way	300	slide with ON/OFF button	3-Way only works with a 3-Way switch
	ELV	Skylark Contour	CTELV-303P	Single-pole/3-way	300	slide with ON/OFF button	3-Way only works with a 3-Way switch
	Reverse Phase	Diva	DVRP-253P	Single-pole/3-way	250	slide with ON/OFF button	3-Way only works with a 3-Way switch
	Reverse Phase	Nova T	NTRP 250	Single Pole	250	slide to off	
	Reverse Phase	Skylark Contour	CTRP-253P	Single-pole/3-way	250	slide with ON/OFF button	3-Way only works with a 3-Way switch

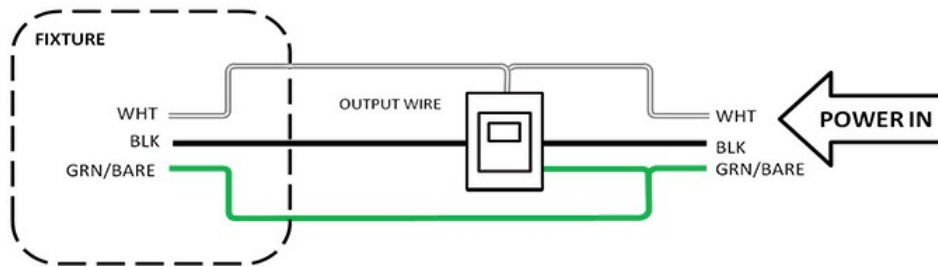

DIMENSIONS

Photometrics

ISOCANDELA CURVES

