LEFTON

INSTALLATION MANUAL




Automatic Sensor Kitchen Pull-Down Faucet

KF2206


www.leftonhome.com | customer@leftonhome.com

Diagram and Parts List

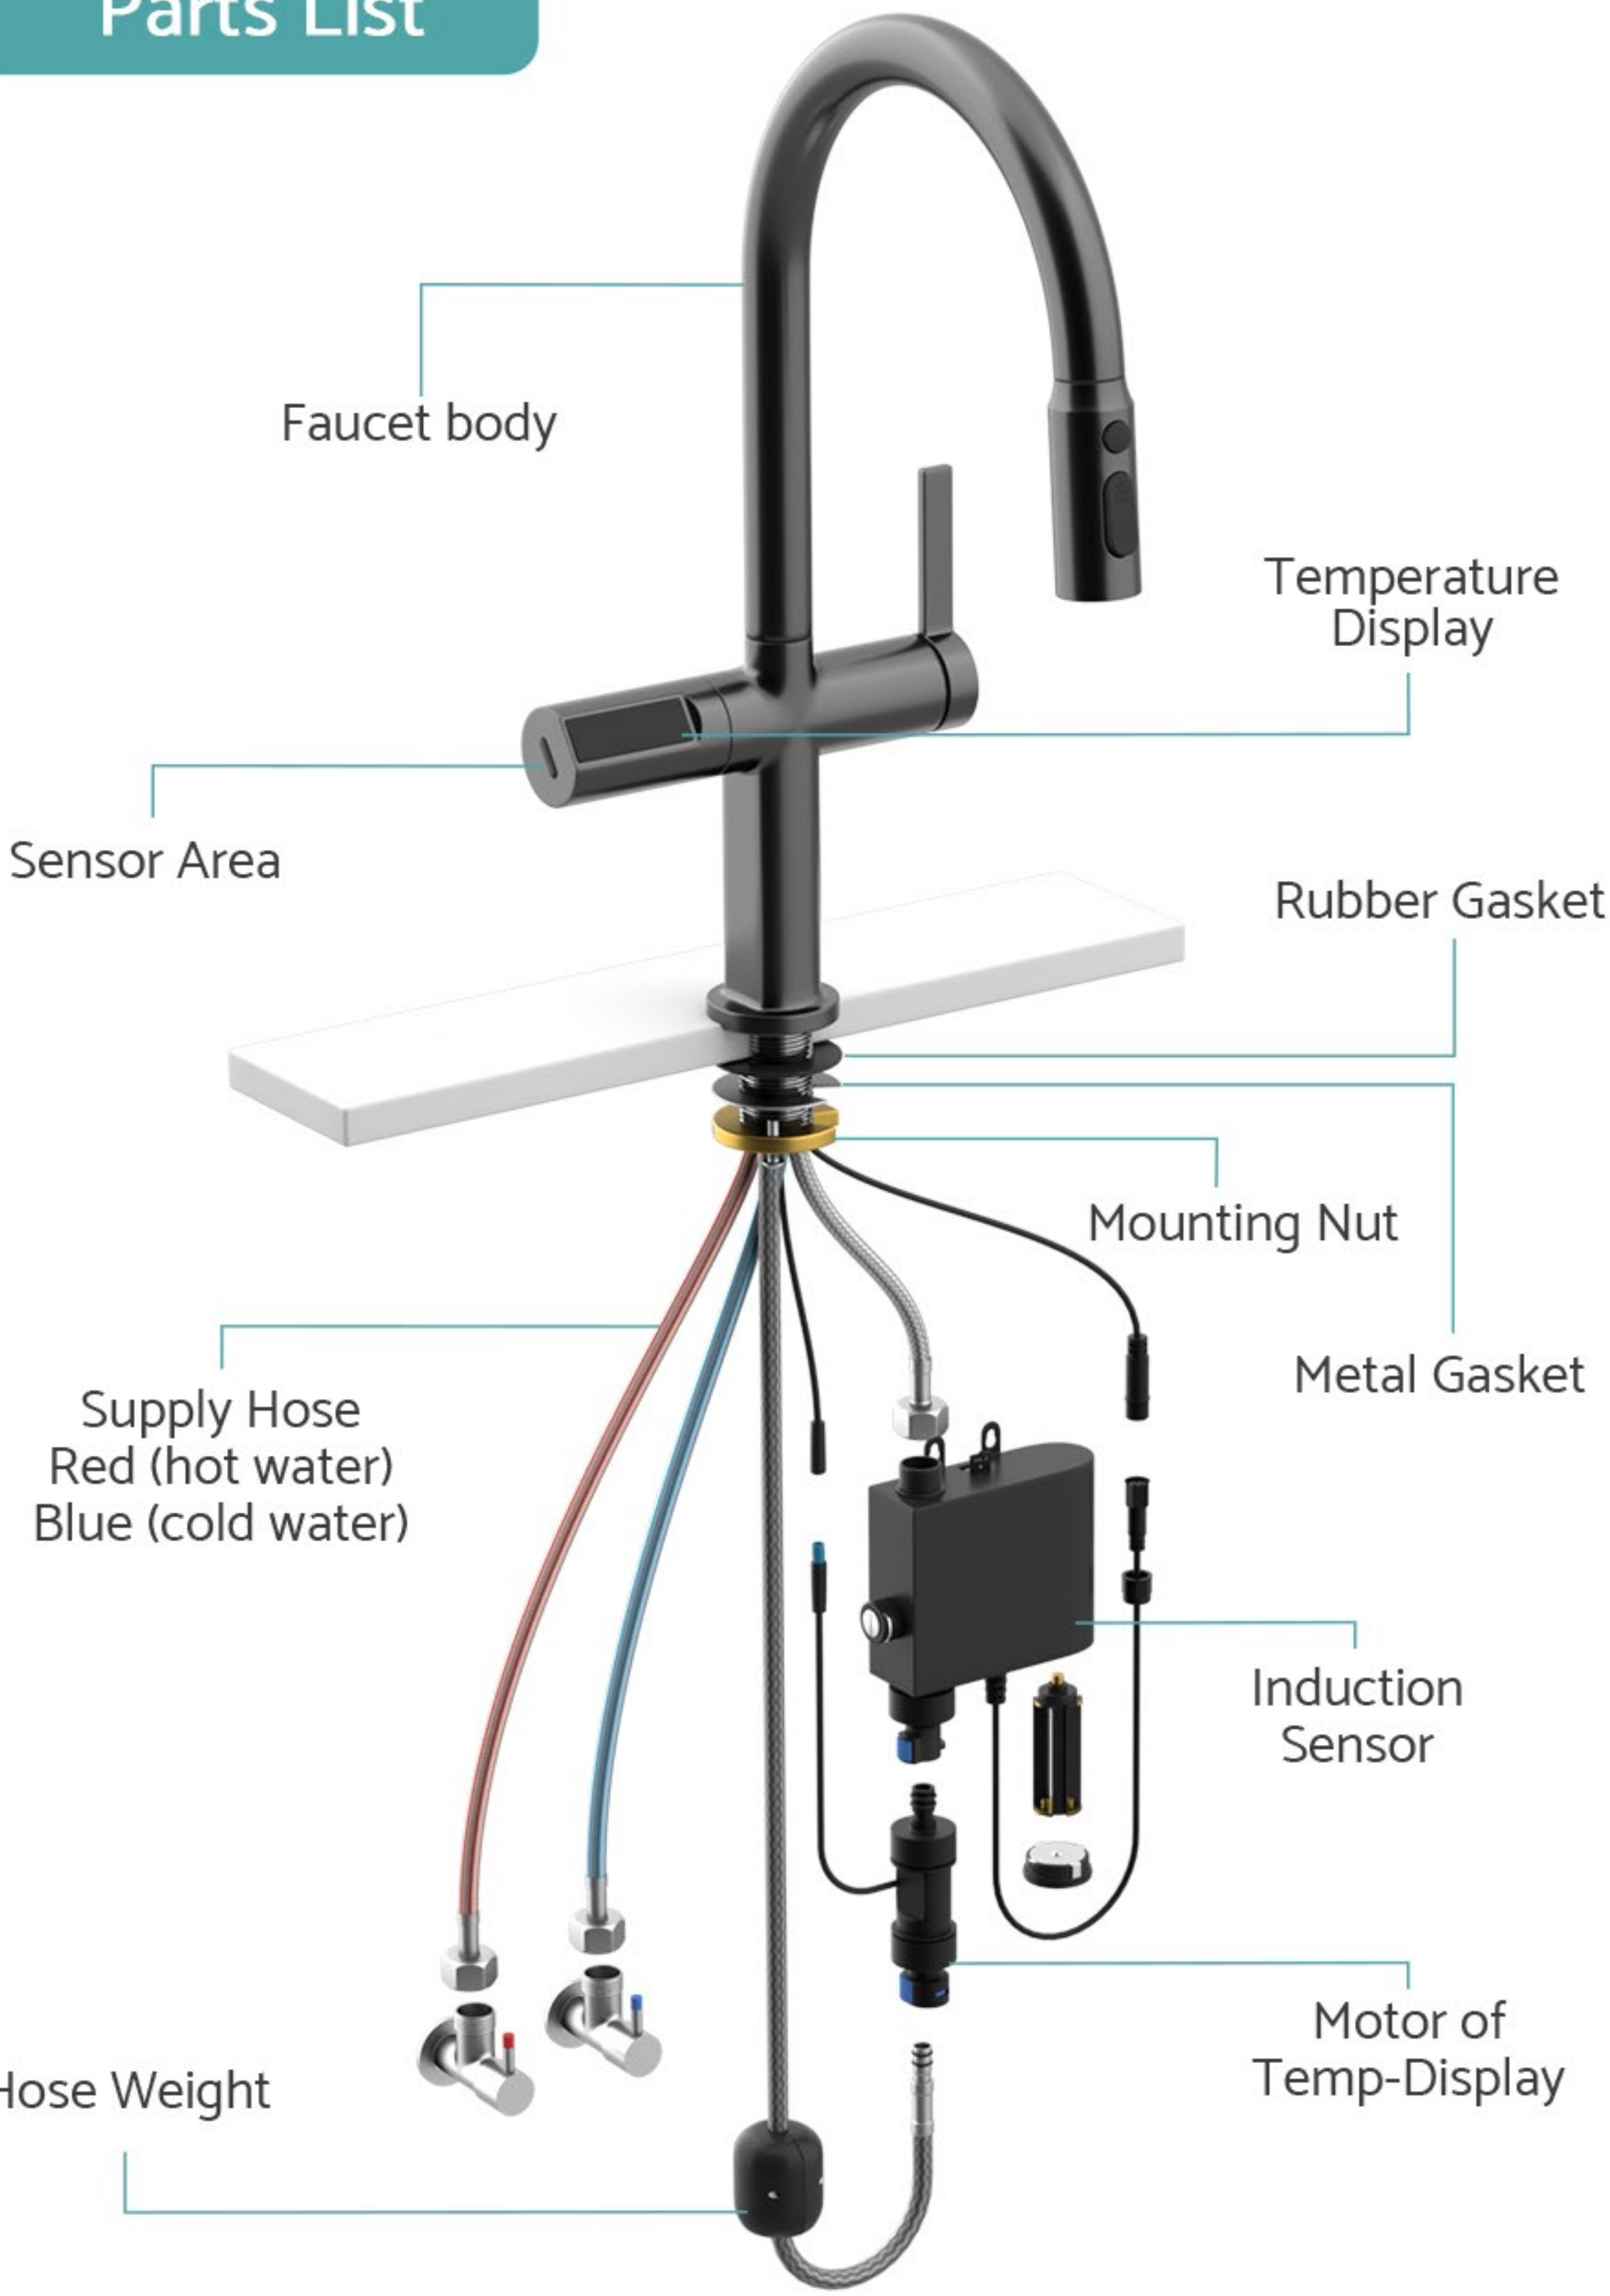


STEP 1:

Install the faucet to the countertop.

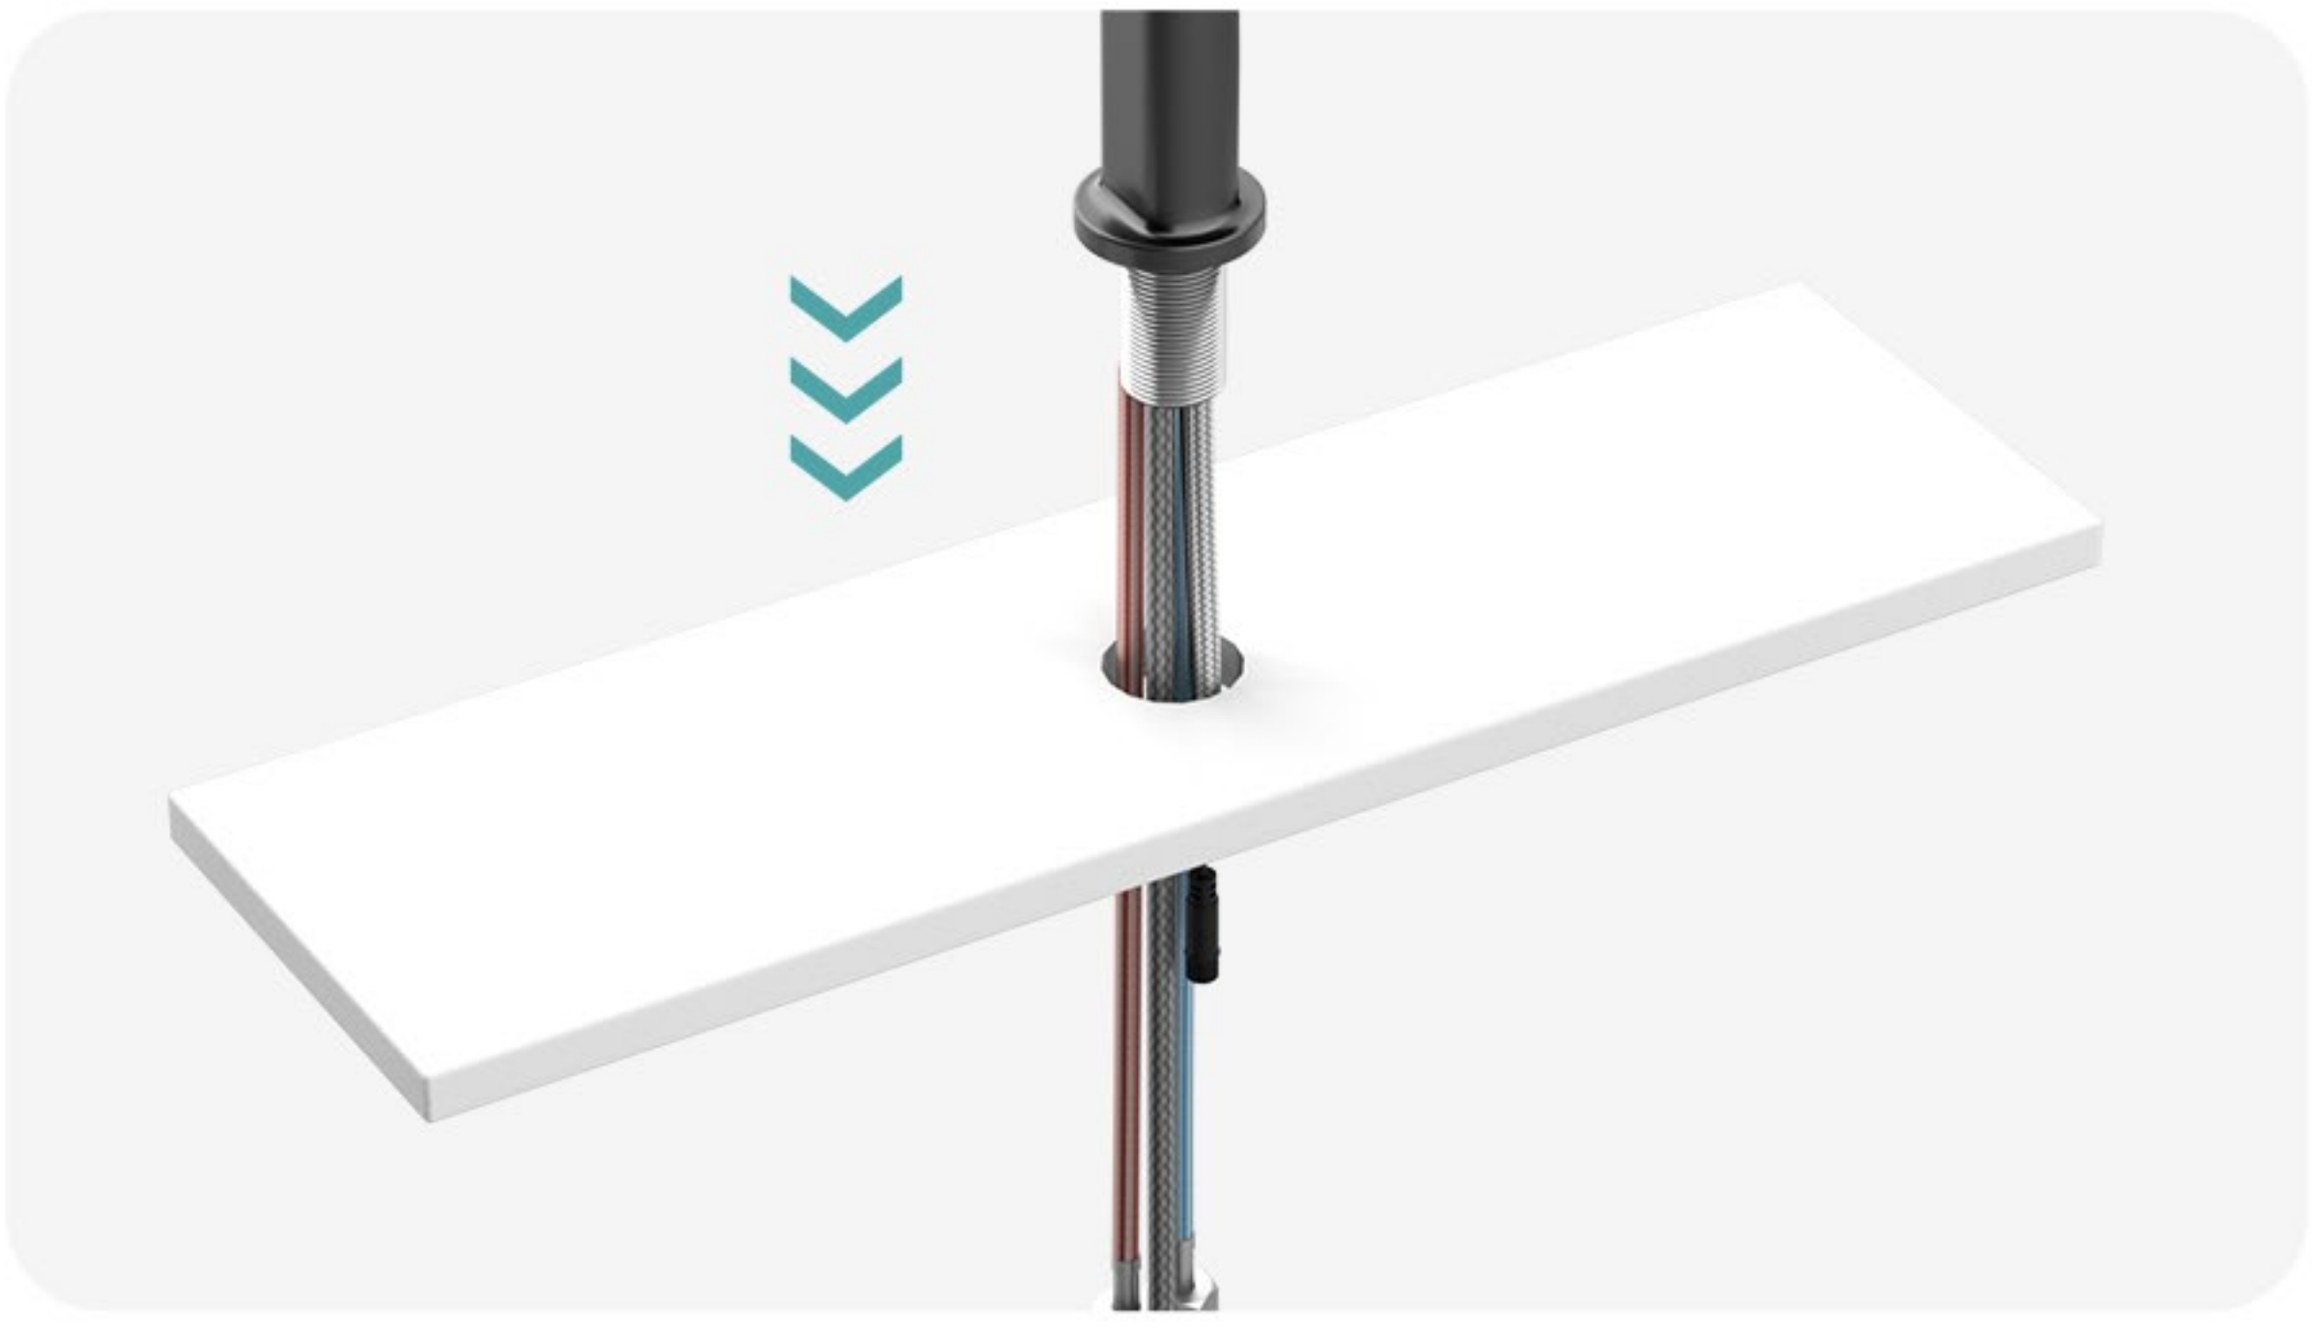

STEP 2:

Install gaskets, nut and fasten the screws.

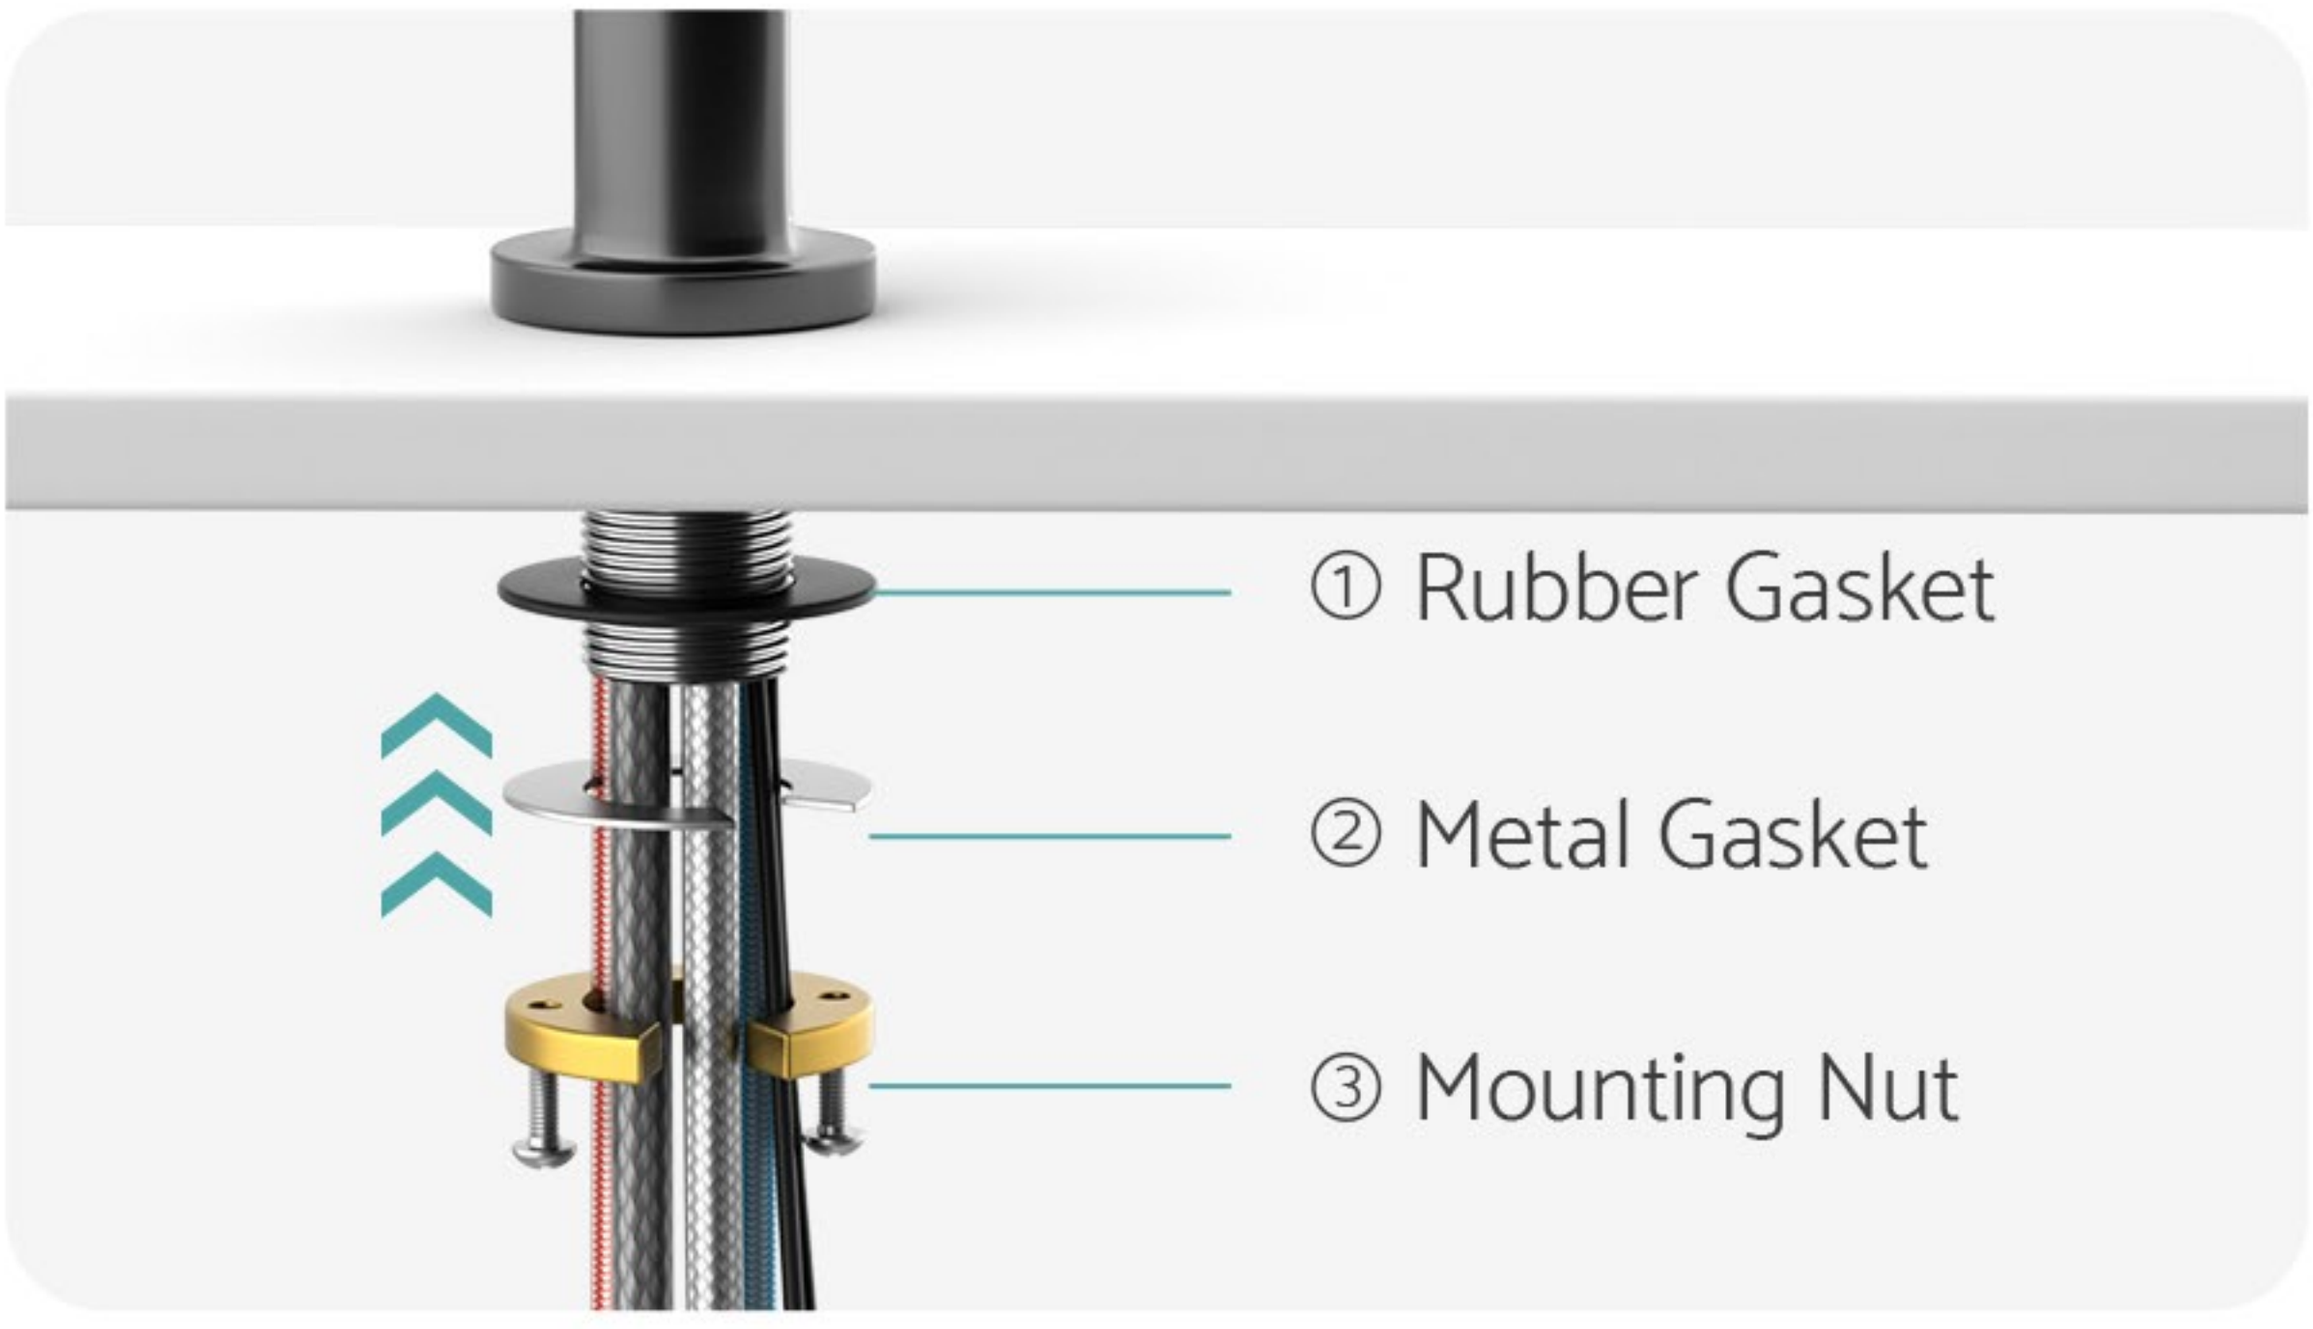


STEP 3:

Fasten the screws with the screwdriver.




STEP 4:

Connect the hot, cold water lines, and tighten them clockwise.

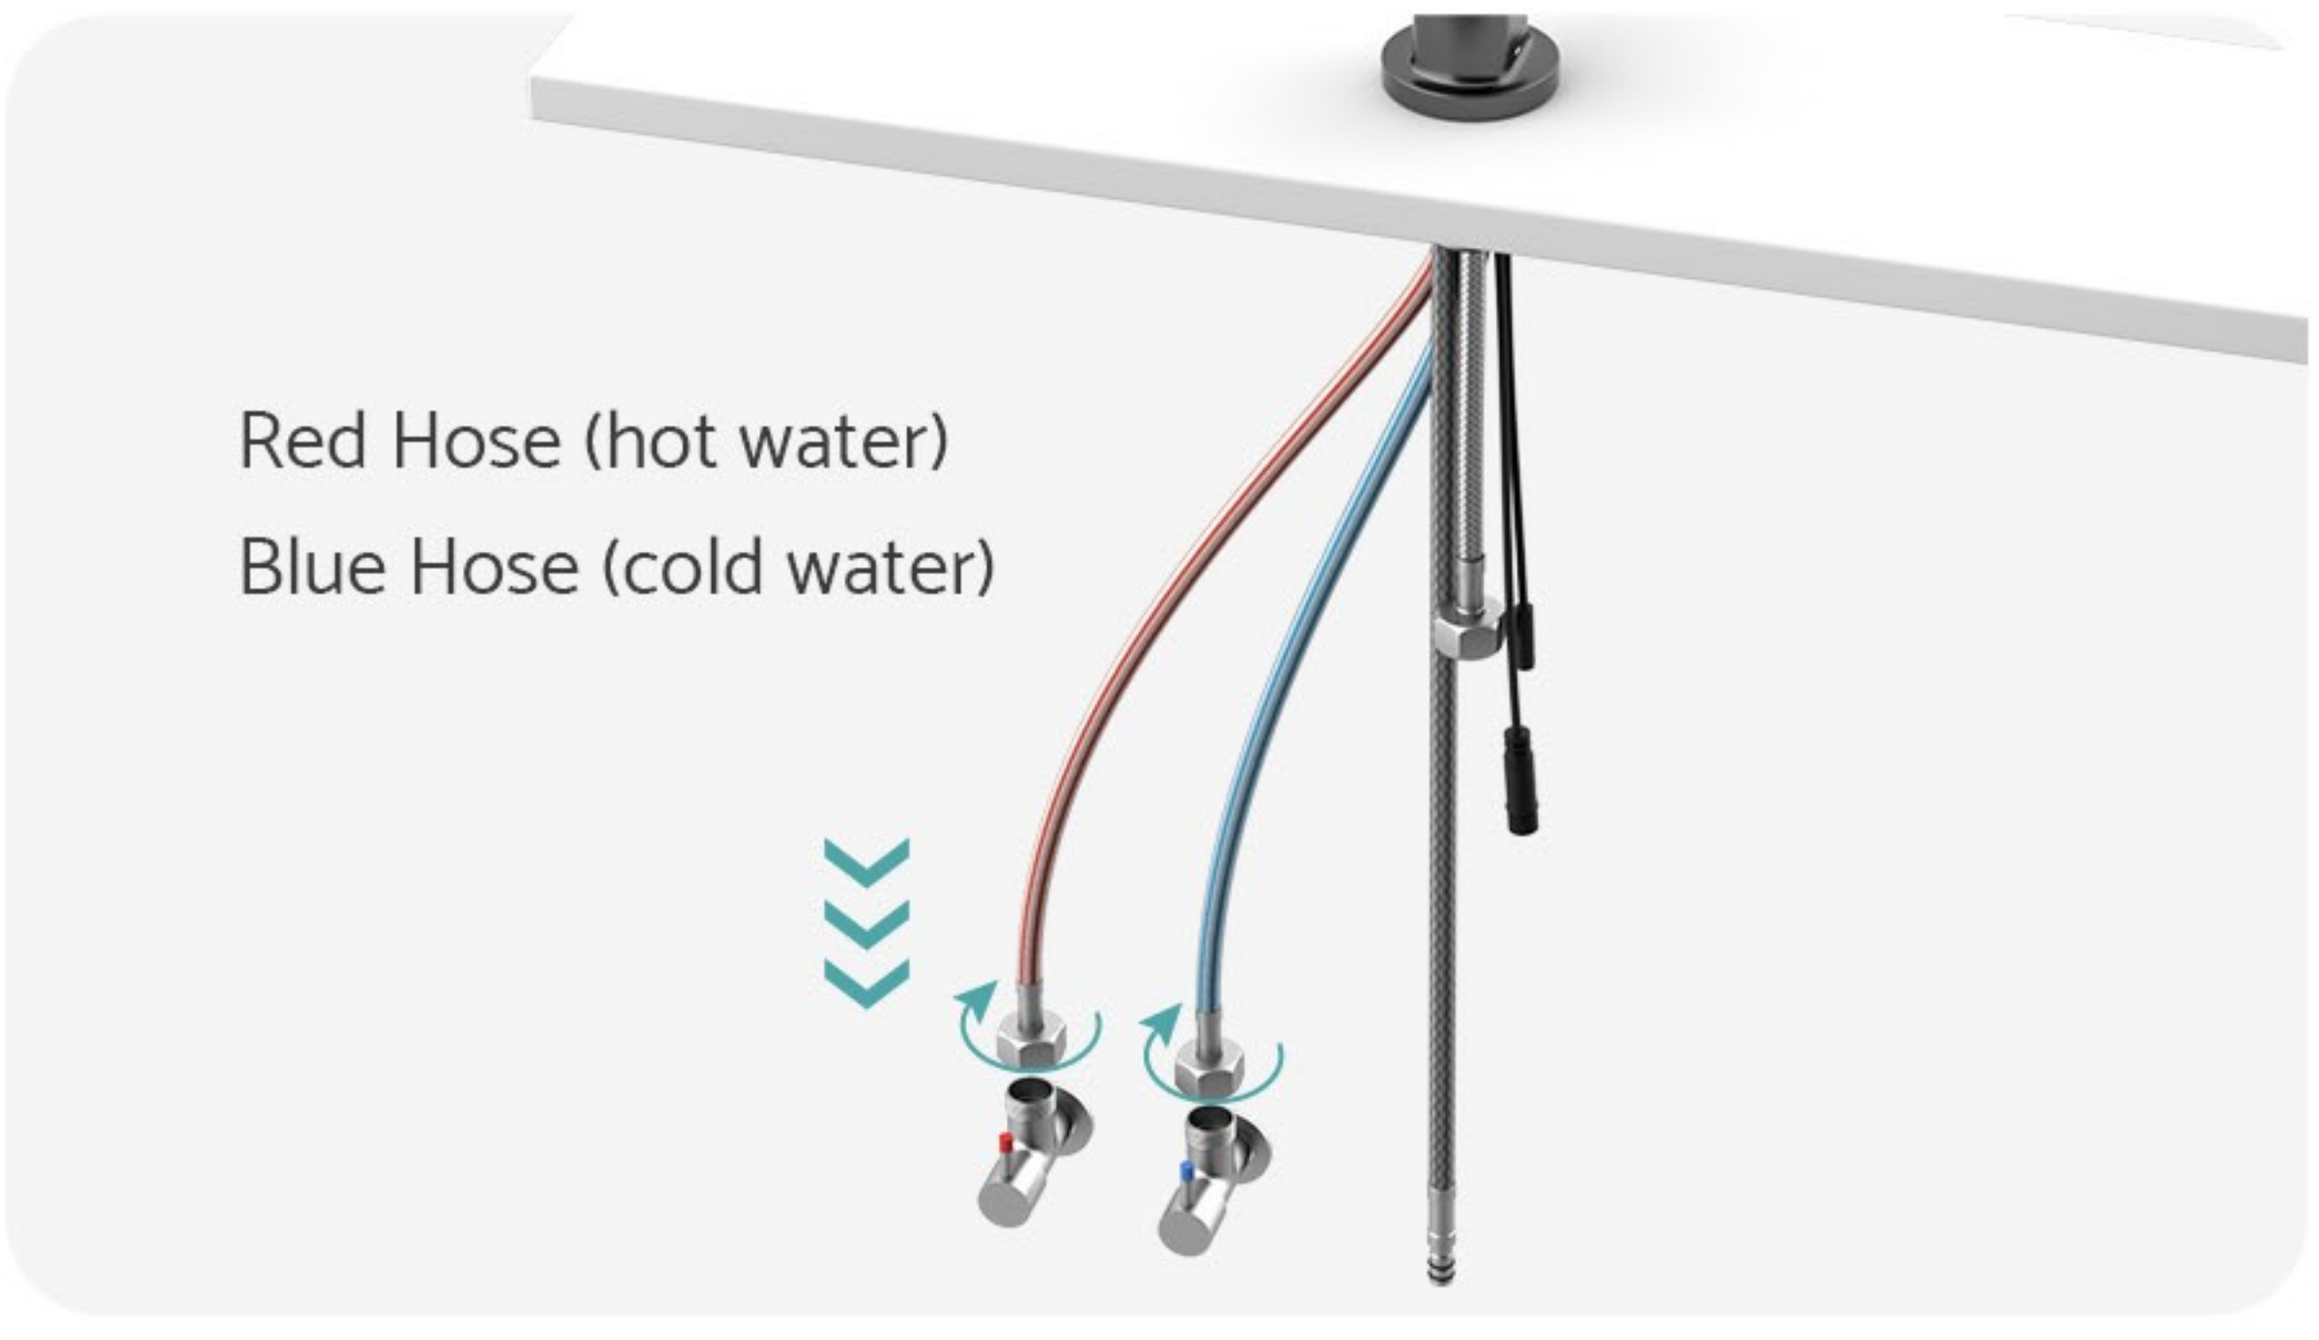


STEP 5:

Turn the battery cover counterclockwise,
remove the holder, and insert three AAA batteries.

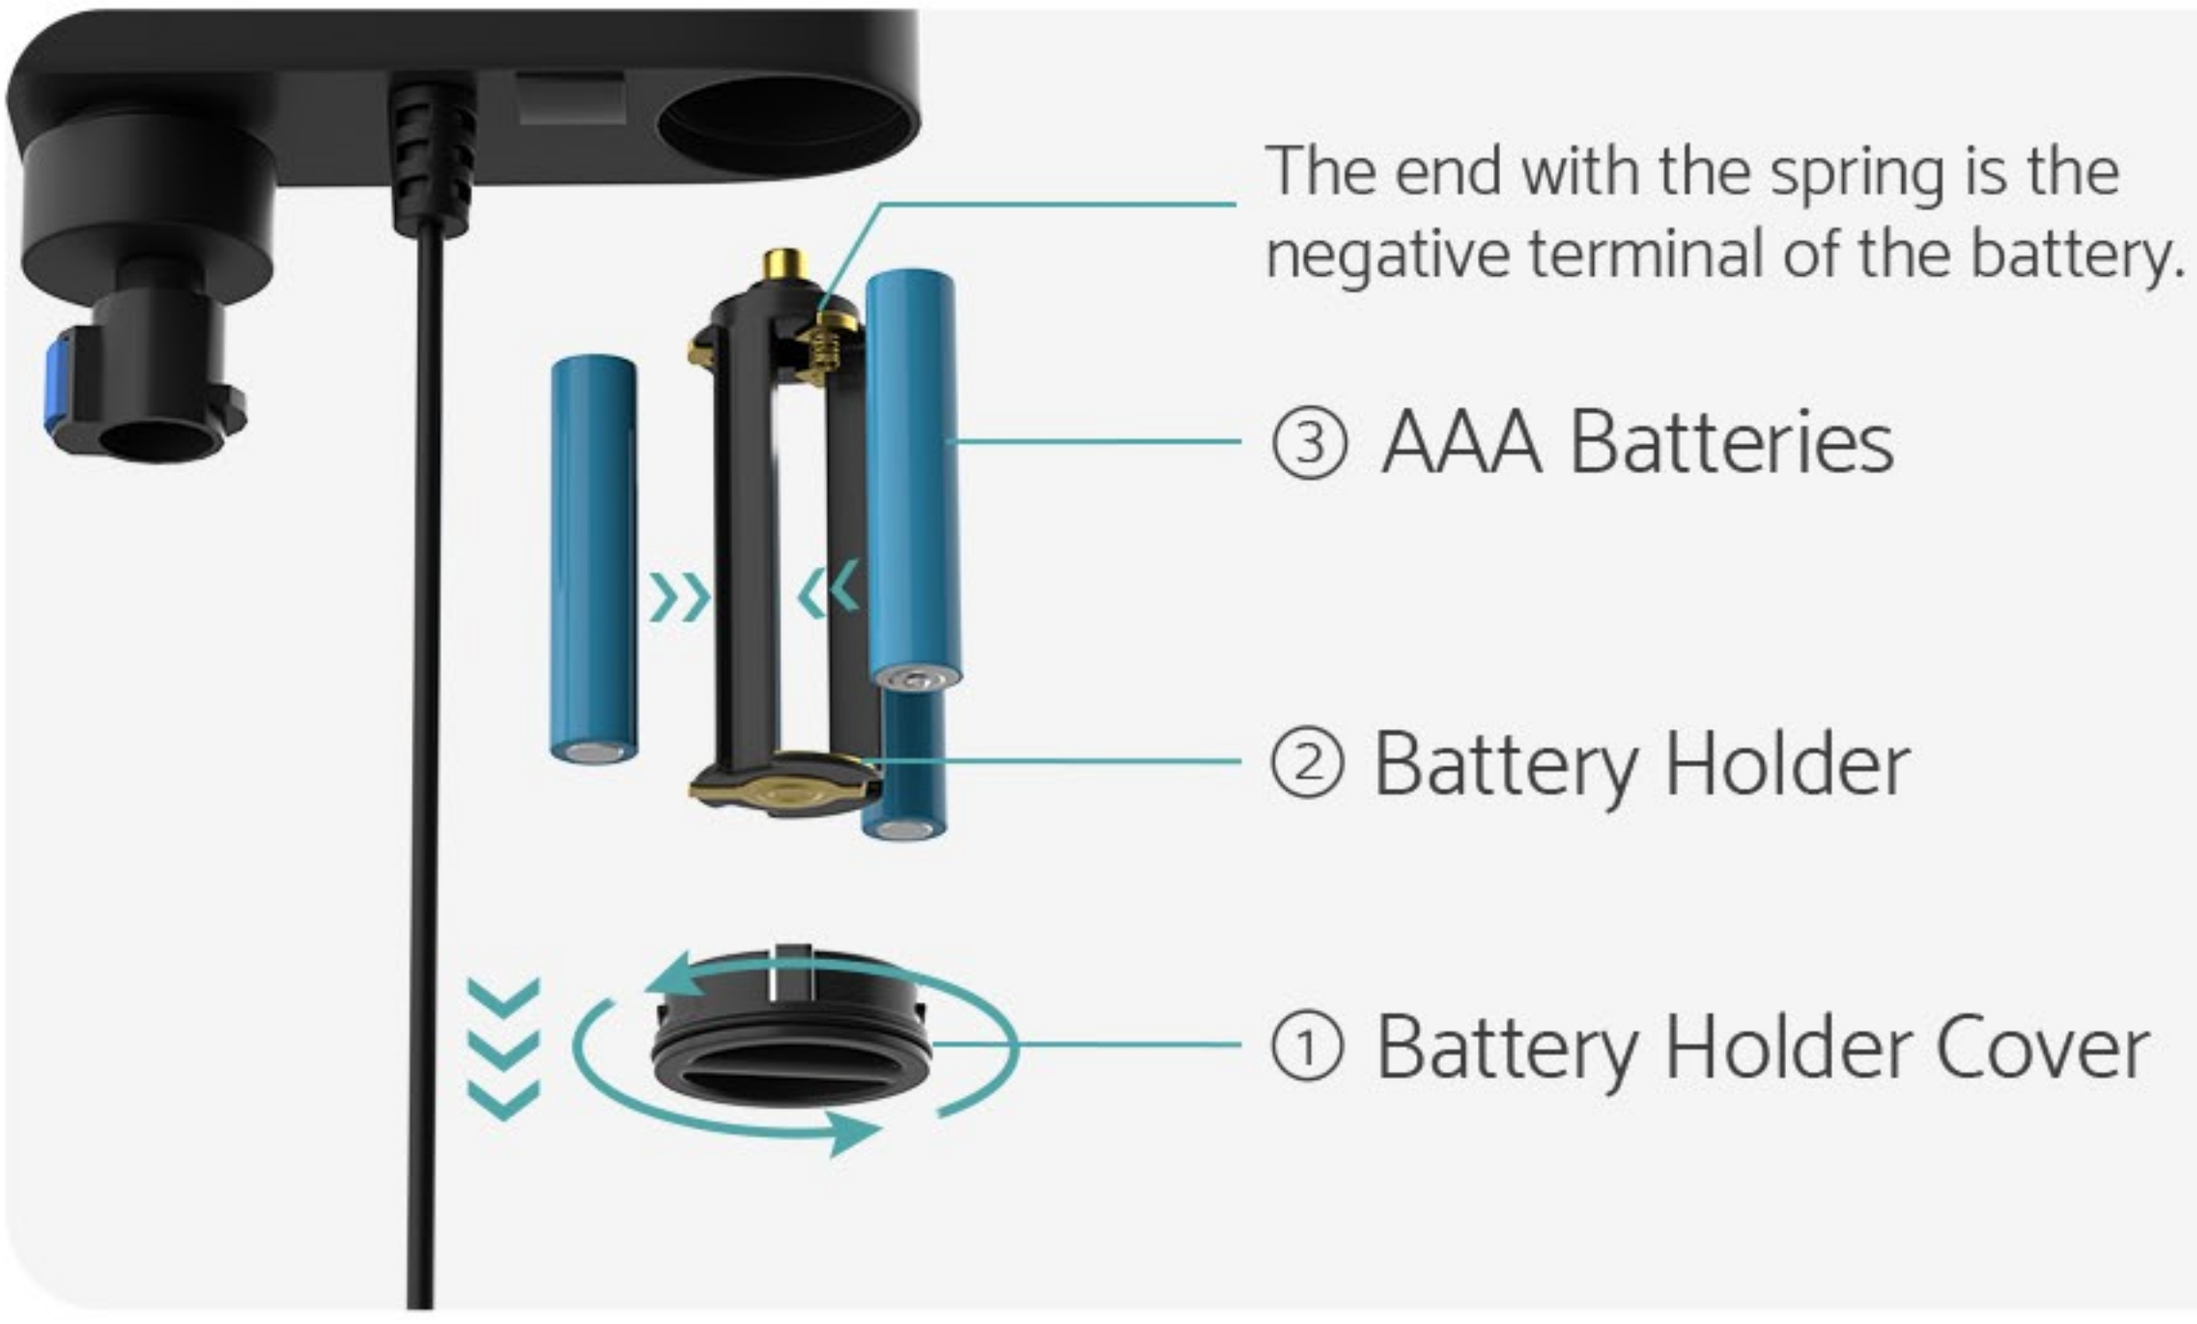

STEP 6:

Insert the holder back into the compartment
and securely close the cover by turning it clockwise.

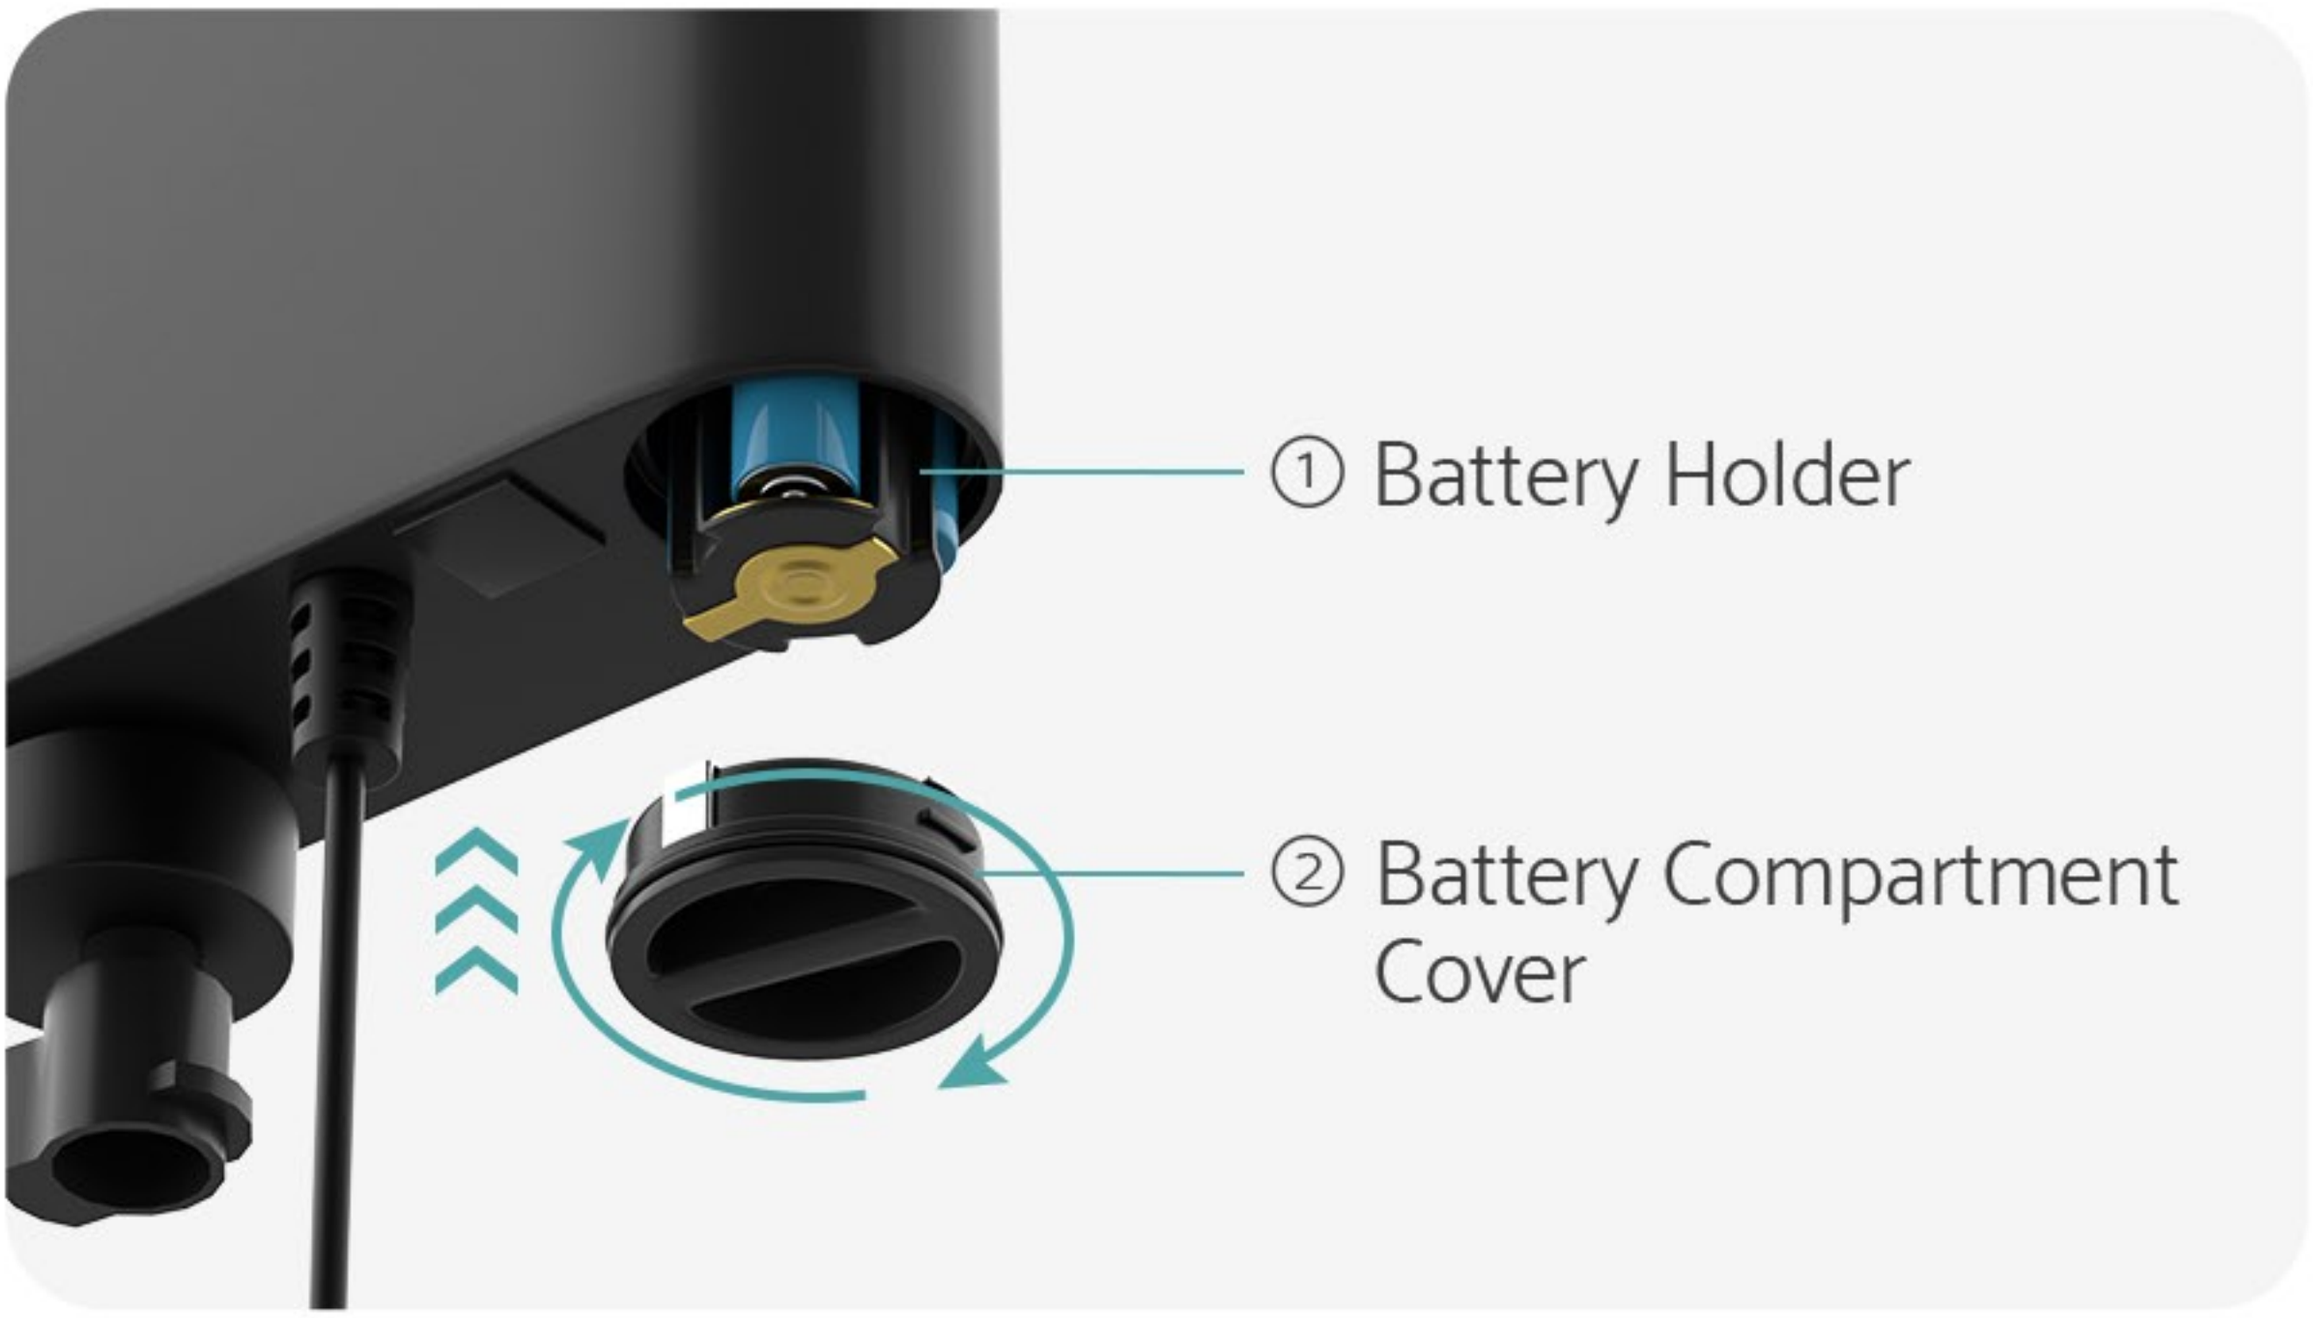

STEP 7:

Connect the sensor box and motor as shown in the diagram.

STEP 8:

Attach the hose weight to the pull-out faucet hose as shown in the picture below.




STEP 9:

Turn on the faucet and check all connections to ensure there are no leaks.



Induction Sensor Control Box

Alternative Power via USB Type-C:
If AAA batteries are not used, the induction sensor can also be powered via the USB Type-C port.

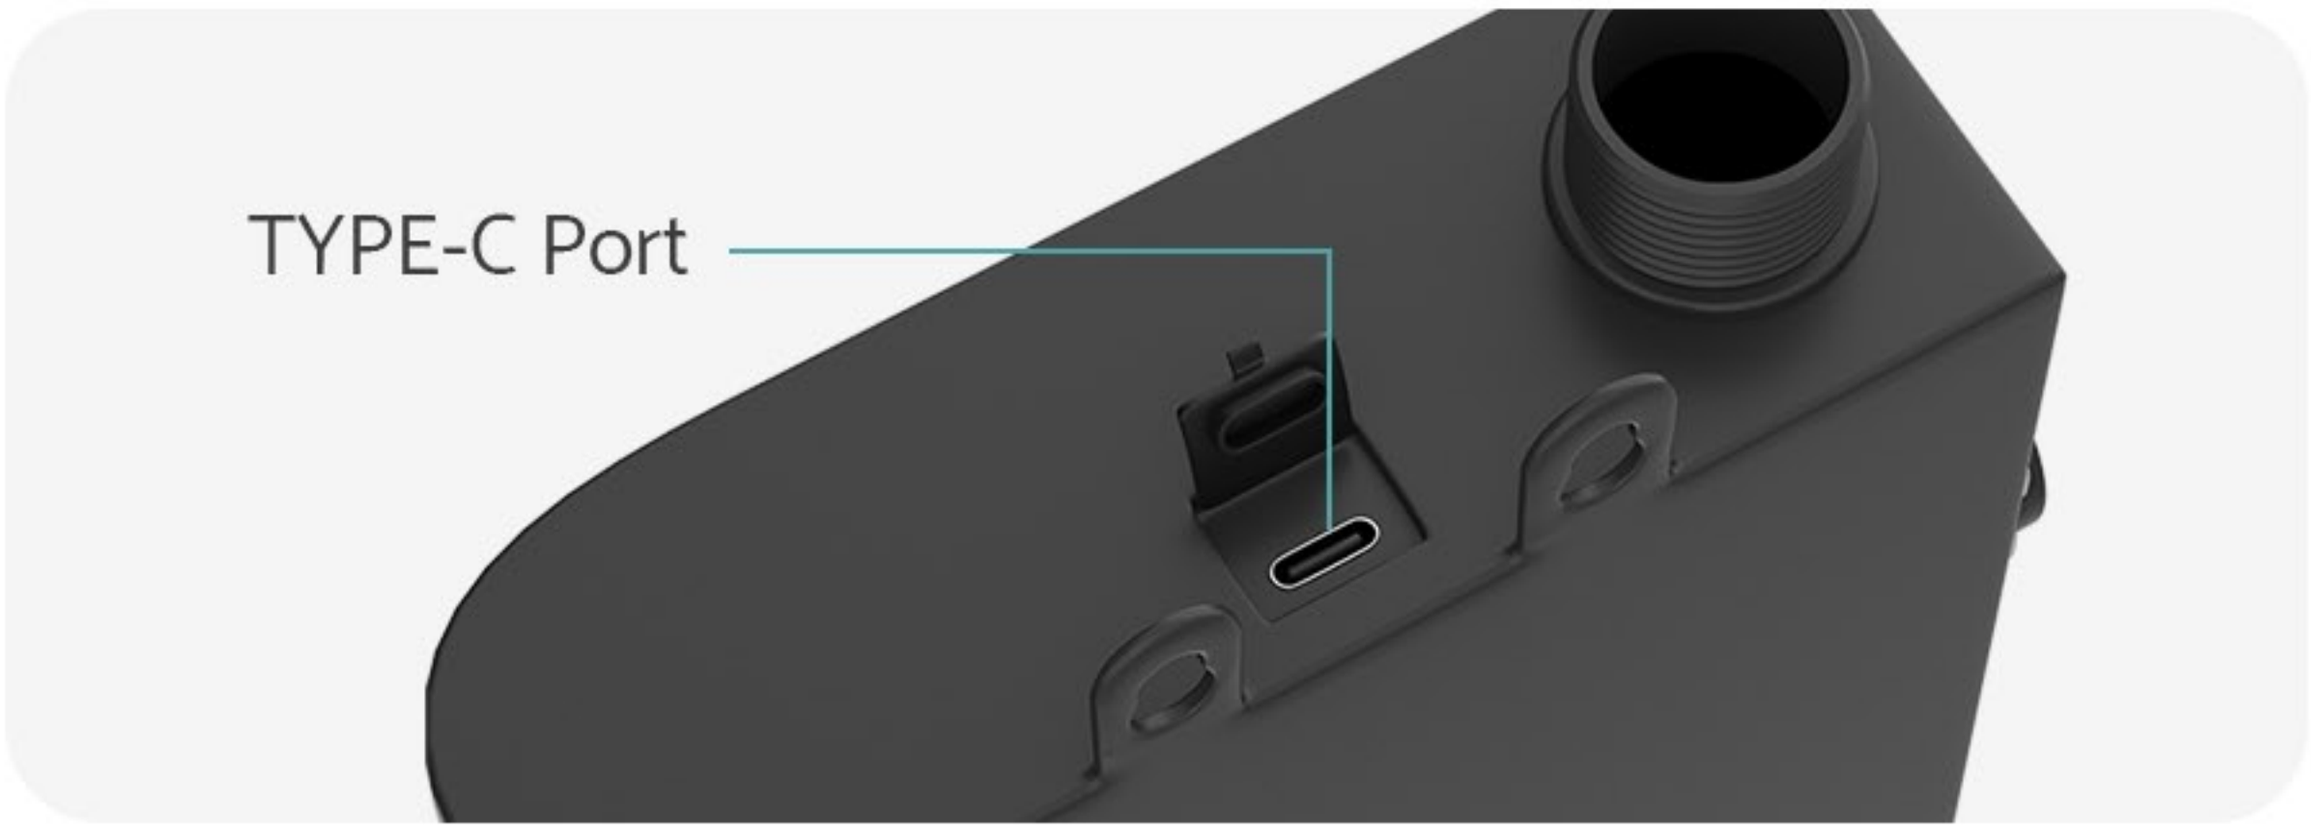

Emergency Switch: If the sensor fails and water is urgently needed, the emergency switch (located on the left side) may be used. Turn counterclockwise to switch to manual mode and use the handle to operate. Contact customer service for a replacement sensor box.

⚠ **Warning:** Once activated, the sensor is permanently disabled and cannot be restored. Operate the emergency switch only when necessary. If the sensor malfunctions, contact customer service first. If disabled by choice, restoration is not supported.

