




## Compact High Speed Hand Dryer, Hands Free


**Code 1198:** Compact, high speed, hands free hand dryer, black finish, 120 volts.

Overall dimensions in inches (centimeters in brackets).

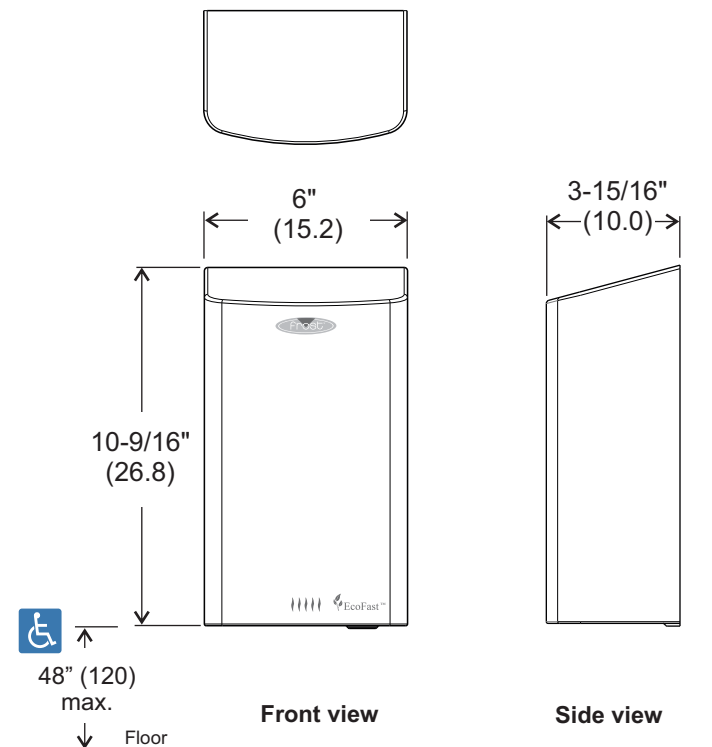

**Code 1198**

## Specifications

- Site location:** • These compact hand dryers are ideal for renovations and areas with 15 amp. circuits available. Compact vertical design allows for mounting where wall space is at a premium.
- Materials:** • Outer casing is 18 ga. drawn steel with black epoxy finish.
- Power Usage:** • Whole unit is rated at 1000 watts. Heating element: 500 watts. Operating Voltage: 110-120 Vac, 50/60Hz, 0.84 - 1kw. Brush motor (.67 hp) with dual ball bearings 500W, 29,000 R.P.M.
- Electrical Safety:** • Motor thermal protection: auto resetting thermostat turns unit off at 95 deg. C (203 deg. F).  
• Heater thermal protection: auto resetting thermostat turns unit off at 85 deg. C (185 deg. F). Resets @ 75 deg. C (167 deg. F). Thermal cut-off @ 142 deg. C (288 deg. F).  
Timing protection: 60 sec. auto shut off. Timing duration: 2 second delayed turn off.
- Performance:** • Drying time: less than 15 seconds. Sound level: 76.2 dB at 1 M. Sensor range: 7" (18cm).  
• Air speed output: 95-115 m/s (212-257 mi/hr). Volume: 80 m<sup>3</sup>/h, (47 cfm).  
• Air output temperature: 55 deg. C (131 deg. F). Hands free sensor: Infrared.
- Warranty:** • Complete 5 years from date of purchase. **Maintenance:** Motor assembly and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce performance and result in void of warranty.
- Certifications:** • UL (Canada, enhanced mark), CE, EMC, LVD, WEEE, ROHS certified. 
- Shipping Weight:** • 3.7 kgs (8.1 lbs)
- Installation:** Supplied with mounting template, instructions, screws and anchors.