


NODE SERIES

VMCL004601A008WH



PROJECT:	TYPE:	CATALOG #:	DATE:
----------	-------	------------	-------

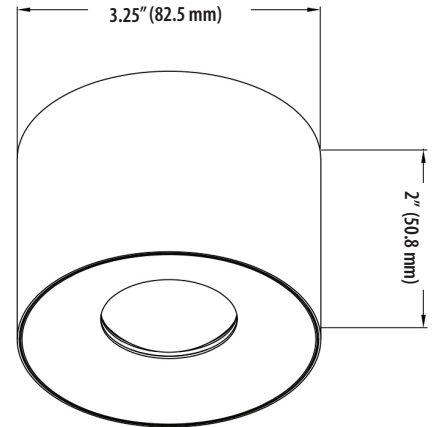

NOMINAL STANDARD SPECIFICATIONS

SKU:	VMCL004601A008WH
FINISH:	WHITE
LUMEN OUTPUT:	291.4
INPUT VOLTAGE:	120 V
COLOR TEMPERATURE:	3000K
CRI: 90	90
DIMMING:	ELV
POSITIONING:	FIXED
BEAM ANGLE:	85°
WATTAGE:	8 W
CUT OUT:	1.5" Dia.
ENVIRONMENT:	DAMP/ IP44
MOUNTING:	SURFACE

FEATURES

- 3.25" LED Surface Mounted Downlight, NODE Series
- Aluminum body structure available in 3 finishes Chrome, White and Antique Brass
- Integrated AC LED fixture, surface mounted
- IC Rated
- DIMENSIONS: 3.25" Diameter x 2"H
- HOLE SIZE: 1.5" Diameter
- ETL, cETL, Title 20 Compliant, Title 24 Compliant, Prop 65 Compliant, Energy Star Compliant
- 3 Year Limited Warranty

THE MEASUREMENTS ARE ROUNDED TO THE NEAREST 1/4"


SAMPLE ORDERING SKU

1	2	3	4	5	6
VMCL004601A	08	WH	30K	B85	
1 - SKU	2 - WATTAGE	3 - FINISH	4 - COLOR TEMP.	5 - BEAM ANGLE	6 - OTHER OPTIONS
VMCL004601A	08 - 8 W	WH - White	27K - 2700*	B85 - 85°	EMD - EMERGENCY DRIVER
		AB - Antique Brass*	30K - 3000		EMC - EMERGENCY CIRCUIT
		CH - Chrome*	35K - 3500*		
			40K - 4000*		

NOTES

RELATED PRODUCTS AVAILABLE:

- VMCL004601A008CH
- VMCL004601A008AB
- VMCL004601B012AB
- VMCL004601B012CH



NODE SERIES


VMCL004601A008WH



PROJECT: _____ TYPE: _____ CATALOG #: _____ DATE: _____


PHOTOMETRICS

30K - 3000 - STANDARD

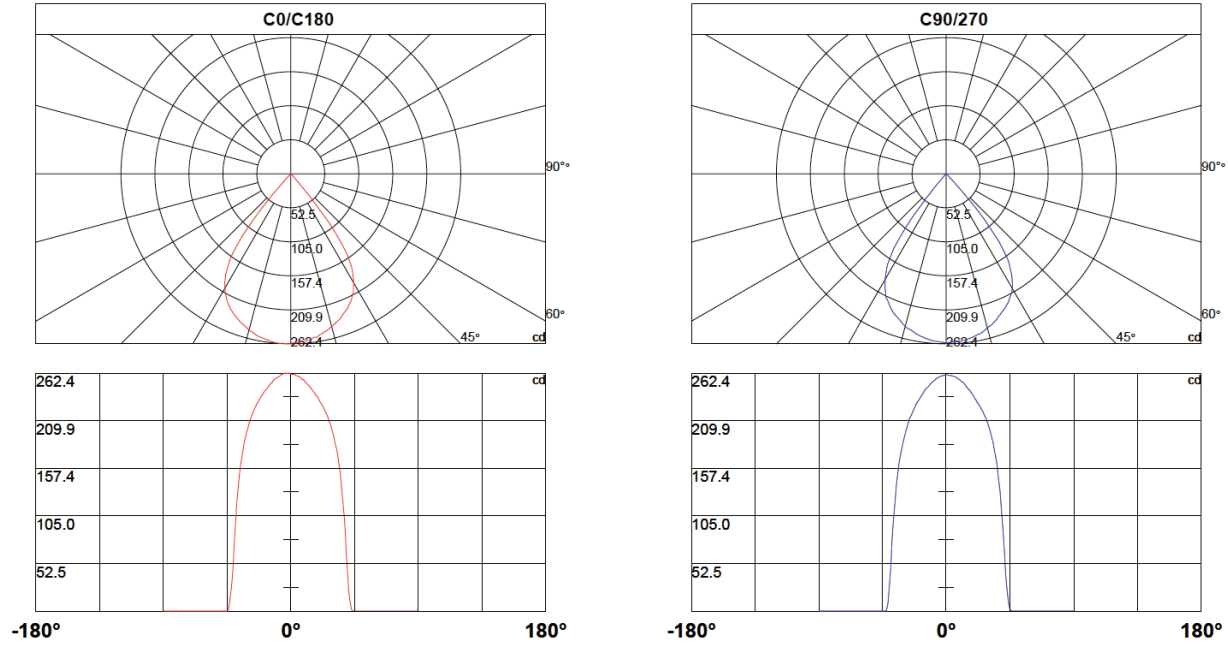

BEAM ANGLE

30K - 3000 - STANDARD

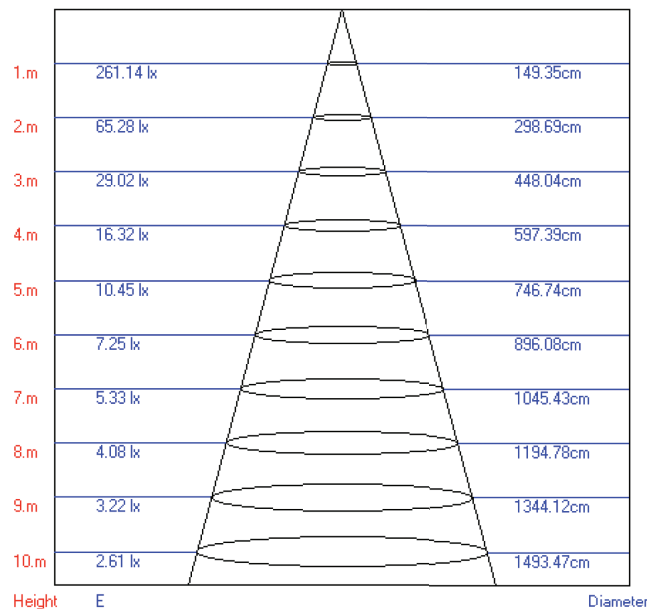

Beam Angle: 73.50°

