


Assembly Instructions

WI3751PC-2PK

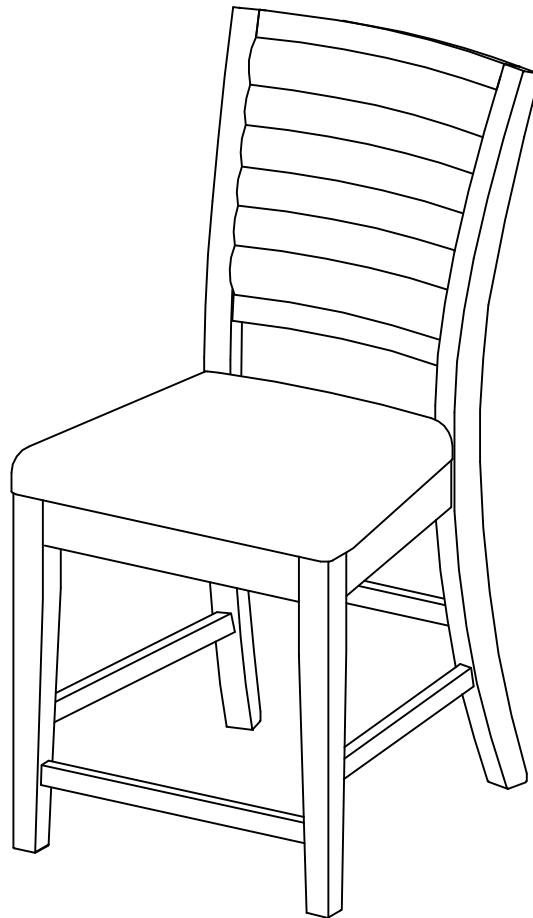

ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.



EASY  DIFFICULT

Tools Required For Assembly:

Allen Wrench




Phillips Screwdriver

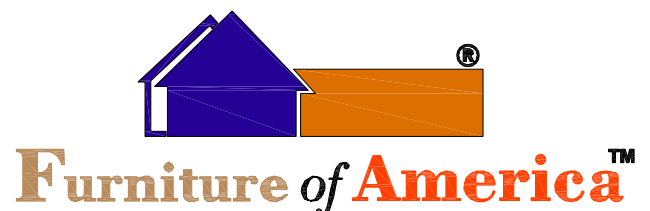

ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.

BASIC ASSEMBLY TECHNIQUES

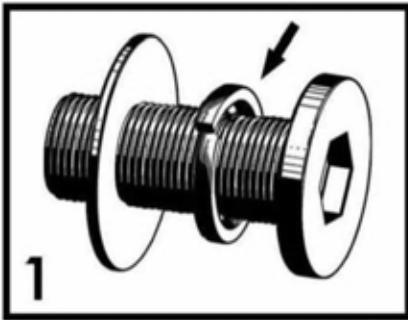


When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.




Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.




Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

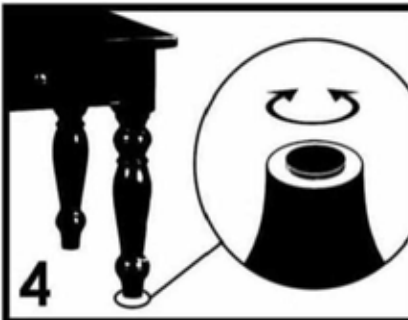

Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

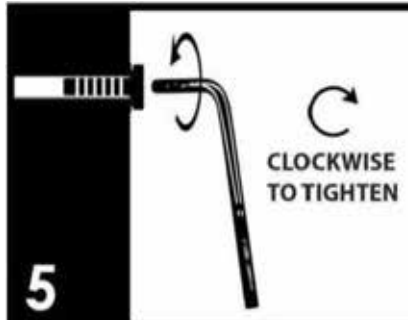


Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

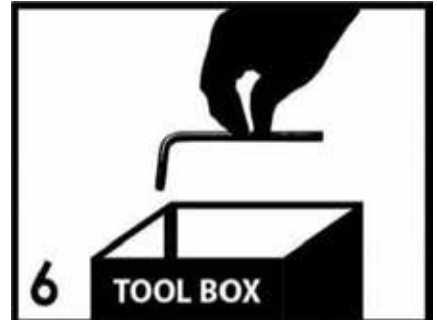

Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.




FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.




Before you begin, please read Page 2 of "Assembly and Care Advice".

And remember, do not tighten until each step is completed or instructed.


Parts List



#1 x 1pc x 2
Backrest W/Legs



#2 x 1pc x 2
Seat




#3 x 2pcs x 2
Front Leg(L&R)



#4 x 1pc x 2
Front Support




#5 x 2pcs x 2
Side Support(L&R)

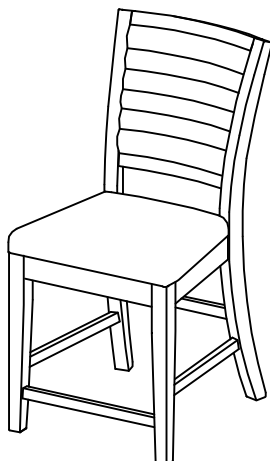


x 2


Hardware List




#A x 4pcs x 2
Bolt (5/16" x 3-1/4"L)



#B x 4pcs x 2
Bolt (5/16" x 2-1/4"L)



#C x 2pcs x 2
Bolt (5/16" x 1-1/2"L)




#D x 10pcs x 2
Flat Washer(Ø5/16")



#E x 10pcs x 2
Lock Washer(Ø5/16")



#F x 1pc x 2
Allen Allen M5




#G x 6pcs x 2
Screw #8x40mm




#C x 2 pcs
#D x 2 pcs
#E x 2 pcs

Turn right (clockwise) to tighten

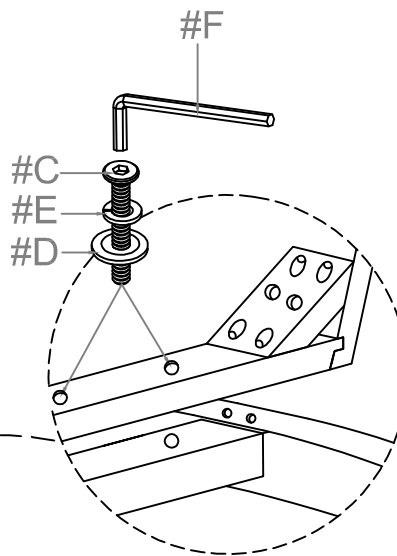


- I. Place the backrest with legs (#1) on a protected surface. Align the seat (#2) with the pre-drilled holes of the backrest with legs (#1).
- II. Prepare a bolt assembly by inserting FIRST the lock washer (#E) onto the bolt (#C) and then the flat washer (#D) onto the SAME bolt (#C), in that order.
- III. Insert the bolt assembly through one of the pre-drilled holes in the center of the seat (#2) and secure the bolt using the Allen wrench (#F) to lock it with the backrest with legs (#1). Repeat the process with second bolt.

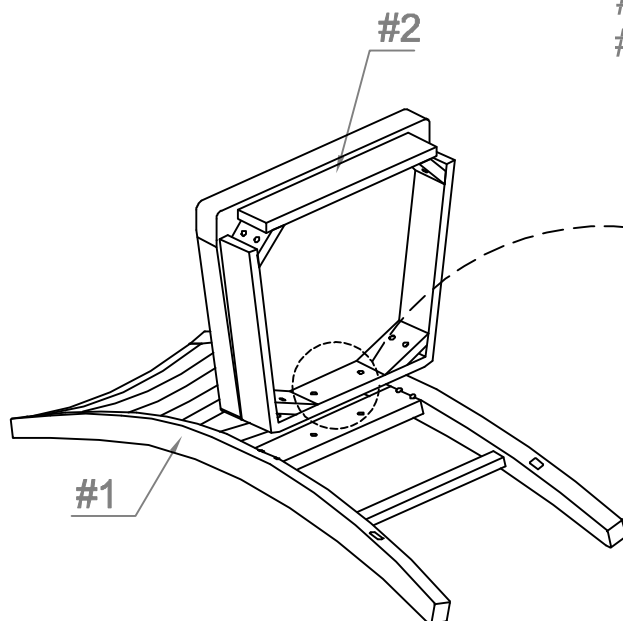


#A x 4 pcs
#D x 4 pcs
#E x 4 pcs

Turn right (clockwise) to tighten

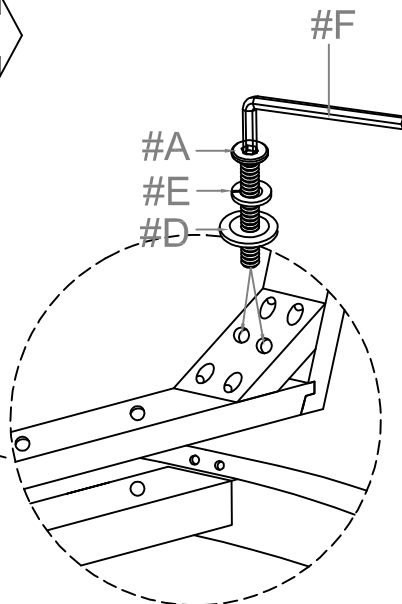


- I. Prepare 4 bolt assemblies by inserting FIRST the lock washer (#E) onto the bolt (#A) and then the flat washer (#D) onto the SAME bolt (#A), in that order.
- II. Insert the bolt assemblies through the pre-drilled holes in the corners of the seat (#2) and secure those bolts using the Allen wrench (#F) to lock them onto the backrest with legs (#1).

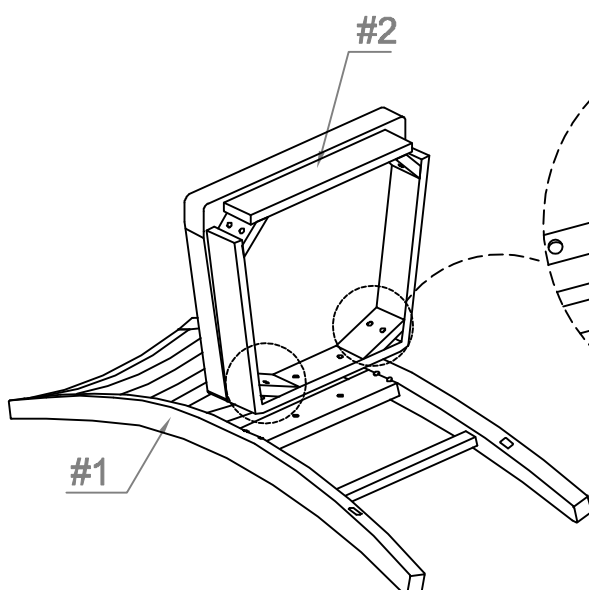




#B x 4 pcs
#D x 4 pcs
#E x 4 pcs

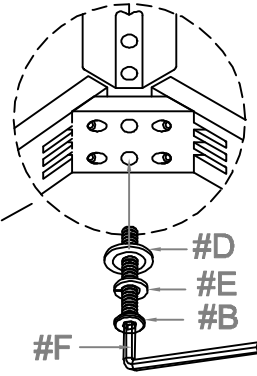


Turn right (clockwise) to tighten

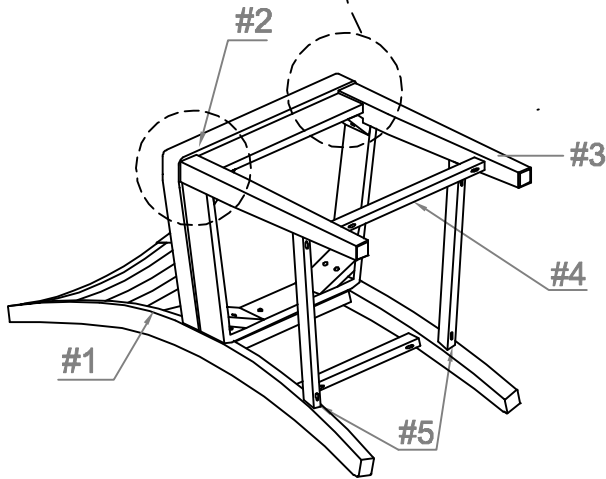

- I. Prepare 4 bolt assemblies by inserting FIRST the lock washer (#E) onto the bolt (#B) and then the flat washer (#D) onto the SAME bolt (#B), in that order.
- II. Insert the bolt assemblies through the pre-drilled holes in the corners of the seat (#2) and secure those bolts using the Allen wrench (#F) to lock them with the front leg (#3).



- I. Align the front support (#4) and the side supports (#5) with the pre-drilled holes on the legs.
- II. Insert the screw (#G) at a diagonal using a Phillips screwdriver. Repeat for the remaining screws (#G).
Tighten screws until properly secure.

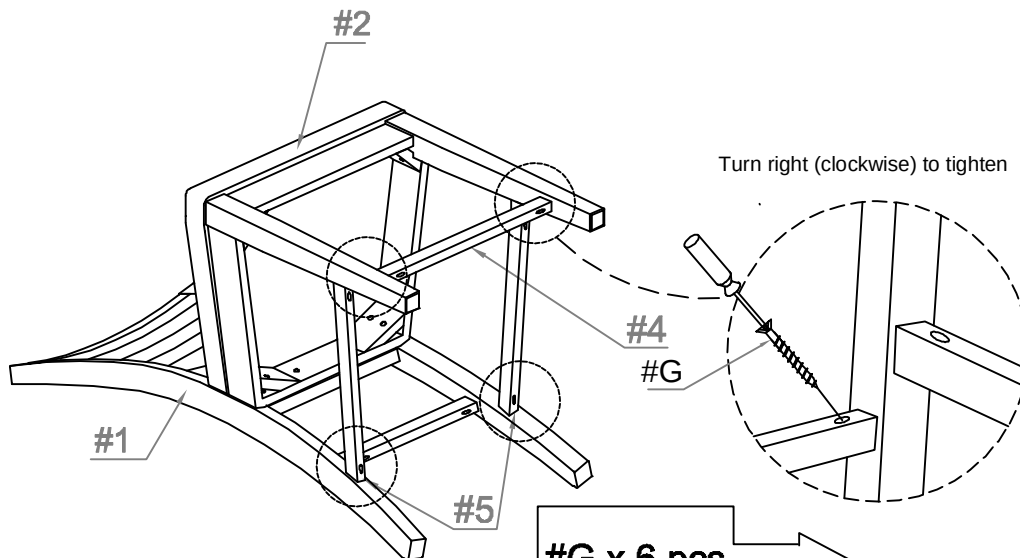

#G x 6 pcs

ASSEMBLY IS COMPLETED