ASSEMBLY AND INSTALLATION INSTRUCTIONS

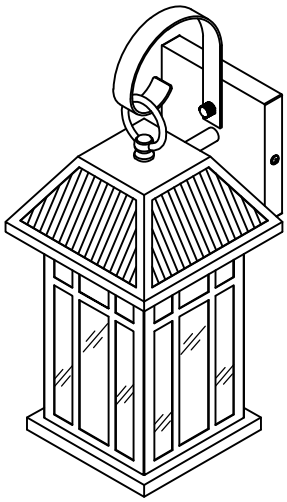
Item No: TYNBD003-1

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:


1. Before installing,consult local electrical codes for wiring and grounding requirements.
2.Read and save these instructions.
3.Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.


1-LIGHT OUTDOOR SOLAR WALL SCONCE





TOOLS REQUIRED



Flathead Screwdriver



Phillips Screwdriver


Ladder


Wire Strippers


Pliers


Electrical Tape


Wire Cutters


Safety Glasses

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don't throw away the package,so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

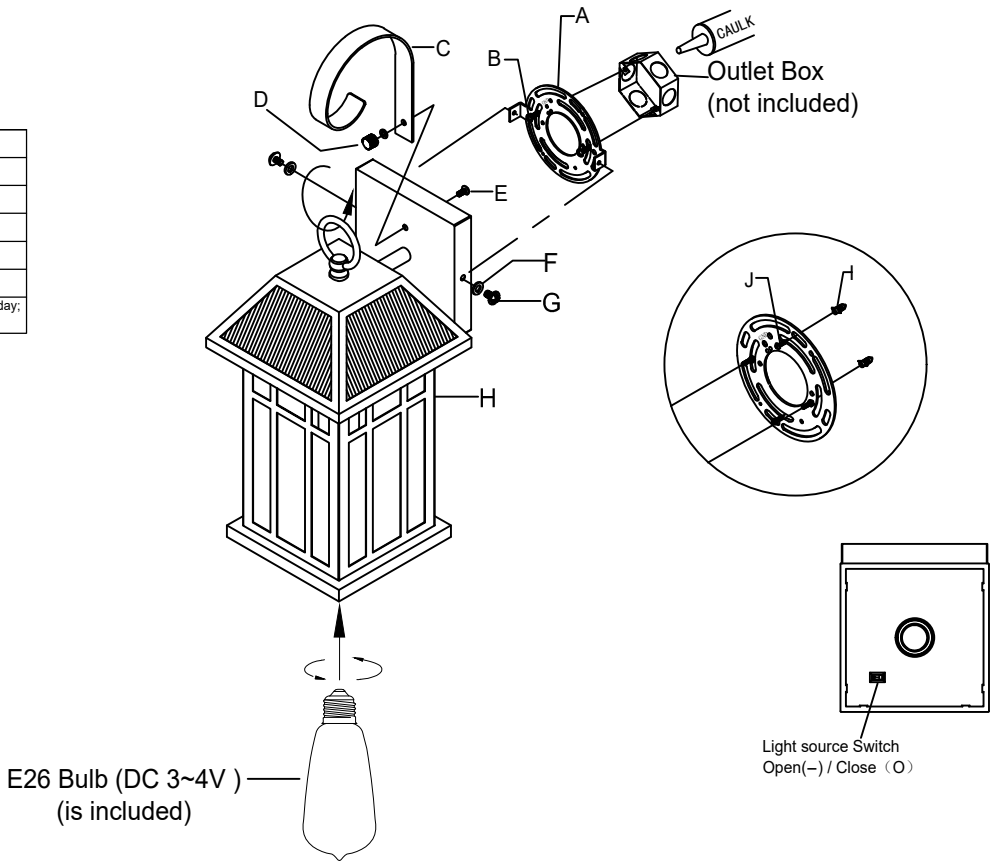
PIECE	DESCRIPTION	QUANTITY
A	Mounting plate	1
B	Outlet box screw	2
C	Bent Metal Strip	1
D	Decorative Nuts	1
E	Screw	1
F	Rubber Pads	3
G	Mounting screw	2
H	Fixture body	1
I	Strain relief bushing	2
J	Wooden screw	2

INSTALLATION

1.Connect the mounting plate (A) to the junction box with the outlet box screw (B), and then fix it.
{First, drill holes in the required positions, then insert the Strain relief bushing (I) into the holes, and use self Wooden screws (J) to fix the mounting plate (A)}
2.Take out the bent metal strip (C) and hook the elbow into the lamp body (H) lifting ring. Fix the straight end of the strip to the wall panel with decorative nuts (D) 、 rubber pads (F) and Screw (E) (as shown in the figure)
3.Install an E26 bulb (Is including)
4.Open the rocker switch for testing {Open (-)/Close (O)}.
5.Use Mounting screws (G) and rubber pads (F) to connect the fixture body (H) to the mounting plate (A).

Kind Reminder :
This lighting fixture needs to be installed In a sunny place

Product Specification	
Battery capacity	2000mA
Output voltage	DC 3~4V
CRI	80
Color Temp	2700K
Material	Metal & Glass
Solar energy control	Automatic lights off during the day; automatic lights on at night.



If you have any issues with use this product, please email us.Be sure to include your order number and photos of the issues. This will help us provide you with faster support and solve your problem.

lighting_service@outlook.com