

### Features

- Acrylic
- Bask™ heated lumbar support with three temperature settings.
- Extra deep 27-1/2" (699 mm) soaking depth.
- 122 BubbleMassage™ airjets.
- Blower motor with 300 W heater, electronic user control, and remote control.
- With Zones of Control™ feature.
- Two raised corner seats, at 6-3/4" (171 mm) and 11-7/8" (302 mm) from bath floor.
- Intended for drop-in or under-mount installation.
- Center drain.
- 48" (1219 mm) x 48" (1219 mm) x 34" (864 mm)

### Required Accessories

K-578 Under-mount kit



For complete listing of available colors, go to [kohler.com](http://kohler.com).

### Codes/Standards


ASTM E162  
ASTM E662  
UL 1795  
CSA B45.5/IAPMO Z124

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Product Specification

Bath shall be 48" (1219 mm) in length, 48" (1219 mm) in width, and 34" (864 mm) in height. Bath shall be made of acrylic. Bath shall have Bask™ heated lumbar support with three temperature settings, 122 BubbleMassage™ airjets, and Zones of Control™ feature. Bath shall have blower motor with 300 W heater, electronic user control, and remote control. Bath shall feature extra deep 27-1/2" (699 mm) soaking depth, two raised corner seats at 6-3/4" (171 mm) and 11-7/8" (302 mm), and center drain. Bath shall be for drop-in or under-mount installation. Bath shall be Kohler Model K-1969-GW.

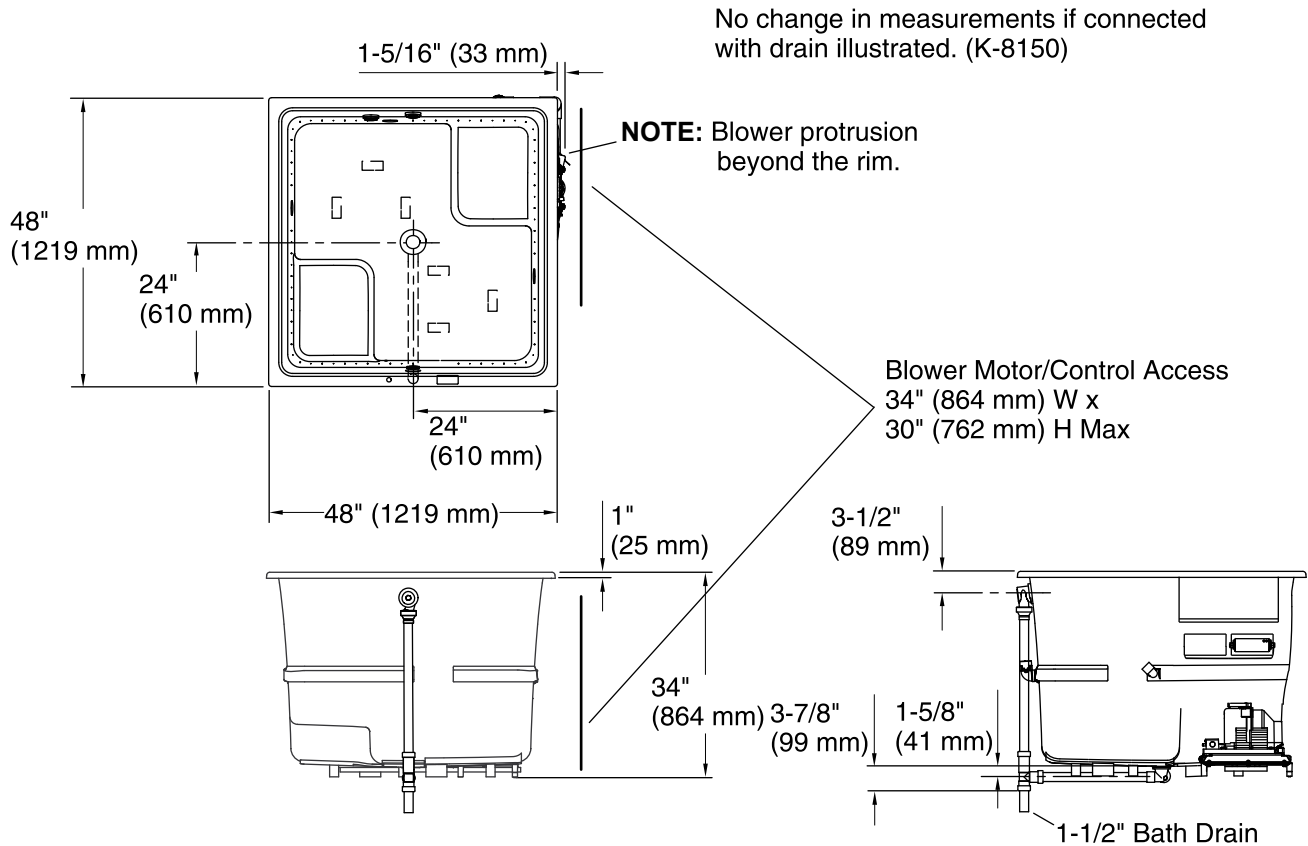

### Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interruptor (GFCI) or Residual Current Device (RCD).

Blower, Heated 220-240 V, 15 A, 50/60 Hz

Surface:

### Technical Information

All measurements are nominal.

Installation:	Drop-in/Undermount
Drain location:	Center
Basin area, bottom:	39-3/8" x 39-3/8" (1000 mm x 1000 mm)
Basin area, top:	44-5/8" x 44-5/8" (1134 mm x 1134 mm)
Weight:	156 lbs (70.8 kg)
Minimum floor load:	105 lbs/ft <sup>2</sup> (512.7 kg/m <sup>2</sup> )
Water depth:	27-1/2" (699 mm)
Water capacity:	171 gal (647.3 L)
Cutout:	Drop-in, 47" x 47" (1194 mm x 1194 mm)
Under-mount kit:	K-578
Electrical rating:	Blower: 220-240 V, 5 A, 50/60 Hz Heated Surface: 120-220 V, 0.5 A, 50/60 Hz

### Installation Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Hot water supply should be 70% of capacity or greater. Installations will vary.